


AMERICAN SPECIALTIES, INC.

441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No:	108	
ISSUED:	2-87	
REVISED:	9-96	

SECURITY FRAMED MIRROR WITH ROUNDED CORNERS

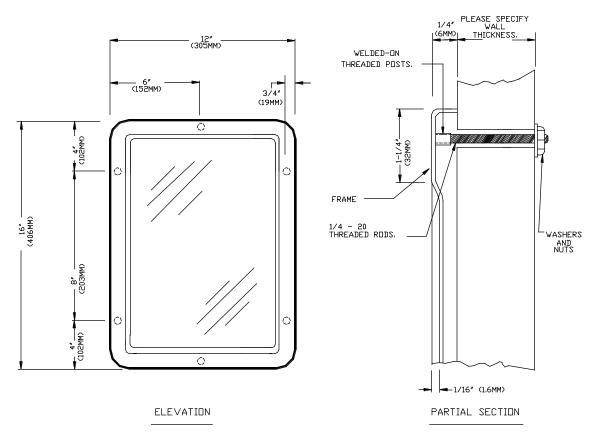

SPECIFICATION

Security Framed Mirror with Rounded Corners for chase mounting shall be fabricated of one piece formed alloy 18-8 stainless steel, type 304, No 18 gauge with № 8 mirror polish. Installed unit shall project 1/4" (6mm) from wall. Rear of frame shall have welded on six (6) 1/4-20" internally threaded posts. Six (6) 1/4-20" threaded rods with washers and nuts shall be supplied as per length specified at time of order to suit wall thickness.

Security Framed Mirror with Rounded Corners shall be Model No 108 as fabricated by American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For Compliance with ADA Accessibility Guidelines, install unit so that bottom edge of reflecting surface is 40" (1016mm) maximum above finished floor. Drill six (6) holes through wall to correspond to six (6) welded-on threaded posts. Insert threaded rods into holes and secure to threaded posts and to wall with six (6) washers and nuts (supplied). The length of the rods is determined by the thickness of the wall on which the mirror will be mounted. Specify suffix for the thickness of the wall in the following increments (eg.108-14-LT6):

Wall Thickness Suffix Up to 6" (152mm) LT6 6" to 8" (152mm to 203mm) 68 Over 8" (203mm), specify thickness: GT8=xxx

GLAZING OPTIONS

Various gauges and types of steel with different finishes are available. See security glazing options section in Specifications Binder. Normal selection of alloy 18-8 stainless steel, type 304, Nº 18 gauge, Nº 8 mirror polish finish is supplied as standard unless other is specified. Specify option by adding suffix to Model No (e.g. 108-31-68).

Accessory Specialties

AMERICAN DISPENSER

Desert Rau Products

WATROUS INC.