


MORRIS PRODUCTS

UFO HI-BAY REMOTE CONTROL

INSTALLATION INSTRUCTIONS

CAT#: 74188B

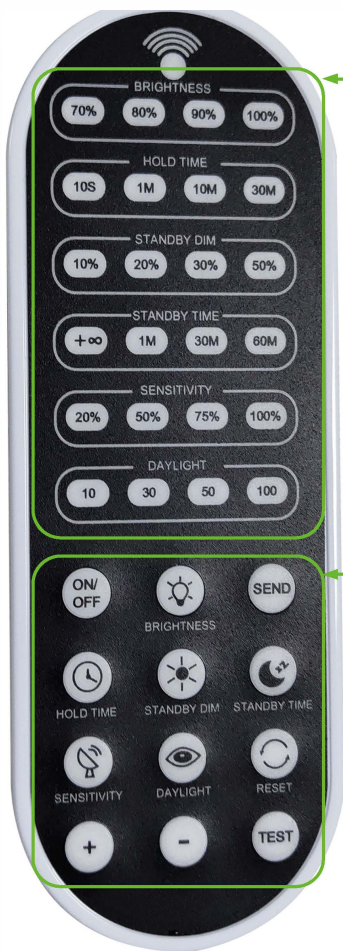

Display Settings:

BRIGHTNESS: (70%/80%/90%/100%)
DAYLIGHT: (10lux/30lux/50lux/100lux)
STANDBY DIM: (10%/20%/30%/50%)

HOLD TIME: (10sec/1min/10min/30min)

SENSITIVITY: (20%/50%/75%/100%)

STANDBY TIME: (+ ∞/1min/30min/60min)

Program Settings:

ON/OFF: Long press the 'ON/OFF' button until the brightness indicator light is on (First-row). Press this button again to turn the fixture on/off.

BRIGHTNESS: Press to adjust dimming level - 70%/80%/90%/100%.

SEND: Press this button to save your settings. The indicator light will turn on to confirm the settings are saved.

HOLD TIME: Press to adjust the hold time - 10sec/1min/10min/30min.

DAYLIGHT: Long press this button until the daylight indicator light turns on, press again to adjust daylight threshold - 10lx/30lx/50lx/100lx.

SENSITIVITY: Press to adjust sensitivity - 20%/50%/75%/100%. **Note:** The PIR Motion Sensor has no sensitivity setting, the default is 100%.

STANDBY DIM: Press to adjust the stand-by dimming level - 10%/20%/30%/50%.

STANDBY TIME: Press to adjust the stand-by time, +∞/1min/30min/60min.

Note: "+∞" means unlimited stand-by time. The light control mode is the primary setting by default.

RESET:

When you press the "RESET" button, light fixtures with a DIP switch will be controlled by DIP switches only. Otherwise, all the settings will change back to the default settings. The default settings are: Brightness 70%, Hold time 10sec, Sensitivity 20%, Daylight threshold is disabled, Stand-by dimming level 10%, Stand-by time +∞.

TEST:

The "TEST" button is used for testing purposes only. Pressing this button will cause the sensor to enter test mode (the hold time is only 3sec).

+ Press this button to increase brightness (0-100%).

- Press this button to reduce brightness (100%-0%).

ATTENTION:

1. If you want to save your settings, it will only work if the remote control is turned on. If you don't press any button within 10 seconds, the indicator light will turn off.
2. When using the "ON/OFF" button, all of the buttons except for the "ON/OFF", "BRIGHTNESS" and "SEND" buttons will be disabled.
3. When using the "TEST" button, all of the buttons except the "TEST", "SENSITIVITY" and "SEND" buttons will be disabled.
4. For every change or update to your configurations, you need to press the "SEND" button and your settings will be saved.
5. Due to the difference in power supply DIMMING ratio, when using different a power, the "BRIGHTNESS" and "STANDBY DIM" buttons will adjust the percentage of power.
6. Light Control Priority Mode: The on/off illumination values of each setting are 10lx/50lx, 30lx/100lx, 50lx/150lx and 100lx/200lx.
7. Light Threshold Mode: The on/off illumination values of each gear are 10lx/30lx/50lx/100lx, when the light intensity is less than the set value and the movement of someone or an object occurs, the light will turn on to the preset brightness.