

# 9200 Series Surface Mounted Electric Strike



Experience a safer  
and more open world

Retro-mounted electric strike with integrated adjustability and field installable options for maximized versatility.

## Convenient


- Retro-mount using existing header prep; no cutting required
- Integrated adjustability provides optimal latch positioning, drastically reducing installation time and labor costs
- Adaptable voltage sensing technology (12-24 VDC)
- Quiet operation

## Flexible Design

- Factory configured or field installable monitoring
- Field selectable fail secure/fail safe
- W Wide or N Narrow backset options

## Quality

- Exceeds Grade 1 standards for strength and performance
- Designed with the strength and durability to meet UL outdoor rating requirements
- Stainless steel construction
- Available in 7 Architectural Finishes to accent existing hardware

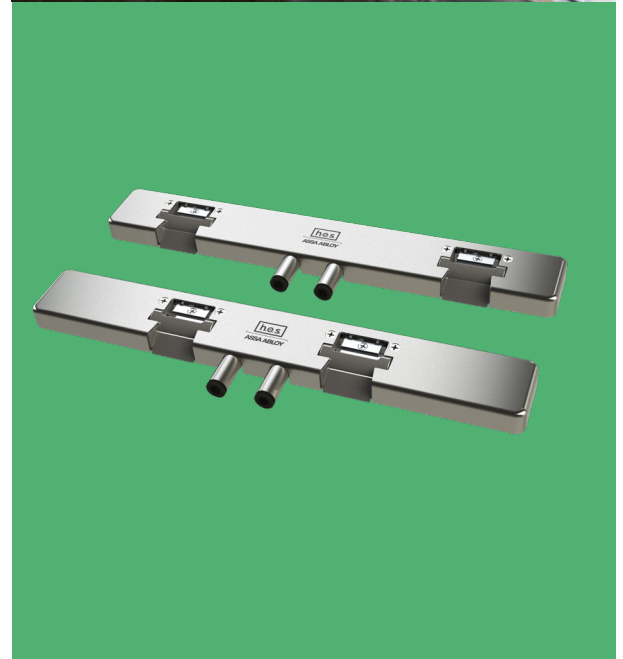

Grade 1



SecuriCare  
Warranty



Tubular  
Exit Device



Field Selectable  
(Fail secure  
/Fail safe)



Dual Voltage  
12/24



PoE  
Friendly



Outdoor  
Rated



Burglary  
Rated

## Features

- Retro-mount using existing header prep
- No cutting required
- Integrated adjustability
- Adaptable voltage sensing technology (12-24 VDC)
- Factory configured or field installable monitoring
- Static strength 1,500 lbs
- Dynamic strength to 70 ft-lbs
- Endurance 1 million cycles
- Field selectable fail secure/fail safe
- Quiet operation
- Stainless steel construction
- HES Securicare 5 year warranty

## Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 Burglary-Resistant
- UL 294
- UL 305

## Specifications

### Frame Application

- Aluminum
- Hollow Metal
- Wood (additional mounting hardware required)


### Electrical

- Adaptable voltage (12-24 VDC)
- 480 mA at 12 VDC, 240 mA at 24 VDC

## Options

- W Wide or N Narrow backset options
- LM Latchbolt monitor
- LMS Latchbolt strike monitor
- Available in 7 finishes

## Dimensions

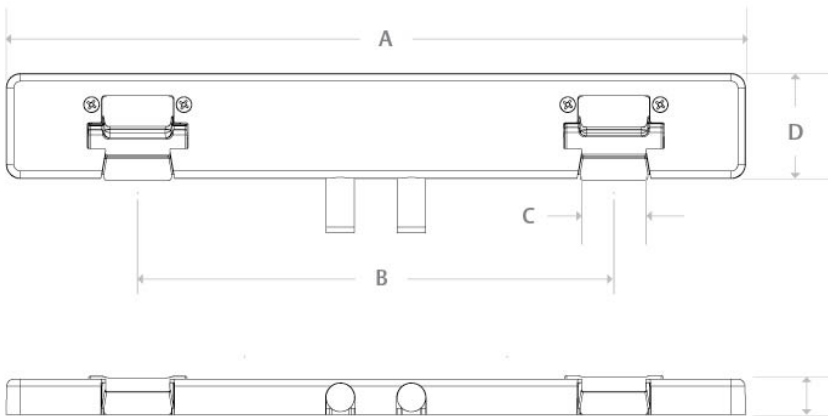

	A	B	C	D	E
9200-W	13" [330.2mm]	8-3/8" [212.7mm]	1-1/8" [28.6mm]	1-7/8" [46.9mm]	5/8" [15.9mm]
9200-N	13" [330.2mm]	4-5/8" [117.5mm]	1-1/8" [28.6mm]	1-7/8" [46.9mm]	5/8" [15.9mm]

## How to Order

SERIES	KEEPER SPACING	FINISH	OPTION (S)
<b>9200</b>	<b>W</b>	<b>- 630</b>	
Electric Strike for tubular, vertical rod exit devices	N 4-5/8" *	605 Bright Brass	(blank) No Monitoring
	W 8-3/8" *	606 Satin Brass	LM Latchbolt Monitoring
		612 Satin Bronze	LMS Latchbolt and Strike Monitoring
		613E Dark Oxidized Satin Bronze Powder	
		629 Bright Stainless Steel	
		630 Satin Stainless Steel	
		BSP Black Suede Powder	

\*Keeper distance centerline to centerline

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.



800 626 7590 | [hesinnovations.com](http://hesinnovations.com)  
10027 S. 51<sup>st</sup> Street, Ste. 102  
Phoenix, AZ 85044 USA

Printed in the U.S.A. Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents)

Copyright © 2023, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. HES-114-0323