S45-2056, S45-2057
No-Hub Waste Connections

Specifications


A 3.30" outside diameter no-hub outlet is standard on all combination units and toilets unless otherwise noted. No-hub outlet is welded to waste tube and extends 3" beyond back of unit.

The no-hub style waste connection offers the best combination of versatility and durability. The no-hub connection utilizes a monolithic Elastomeric PVC sleeve to form a flexible connection between two pieces of waste piping. The connection is sealed and secured with two stainless steel clamps.

The no-hub connection is significantly easier to make than a rigid connection, because the no-hub flexes to compensate for out-of-plumb walls and misaligned rough-in piping. No-hub flexible coupling can be assembled and disassembled virtually an unlimited number of times without loss of performance. Sound-deadens plastic waste piping systems.

For use in connecting 3" or 4" nominal pipe to unit no-hub outlet.

Model Number	Description
○ S45-2056	3" No-Hub Waste Connections
○ S45-2057	4" No-Hub Waste Connections

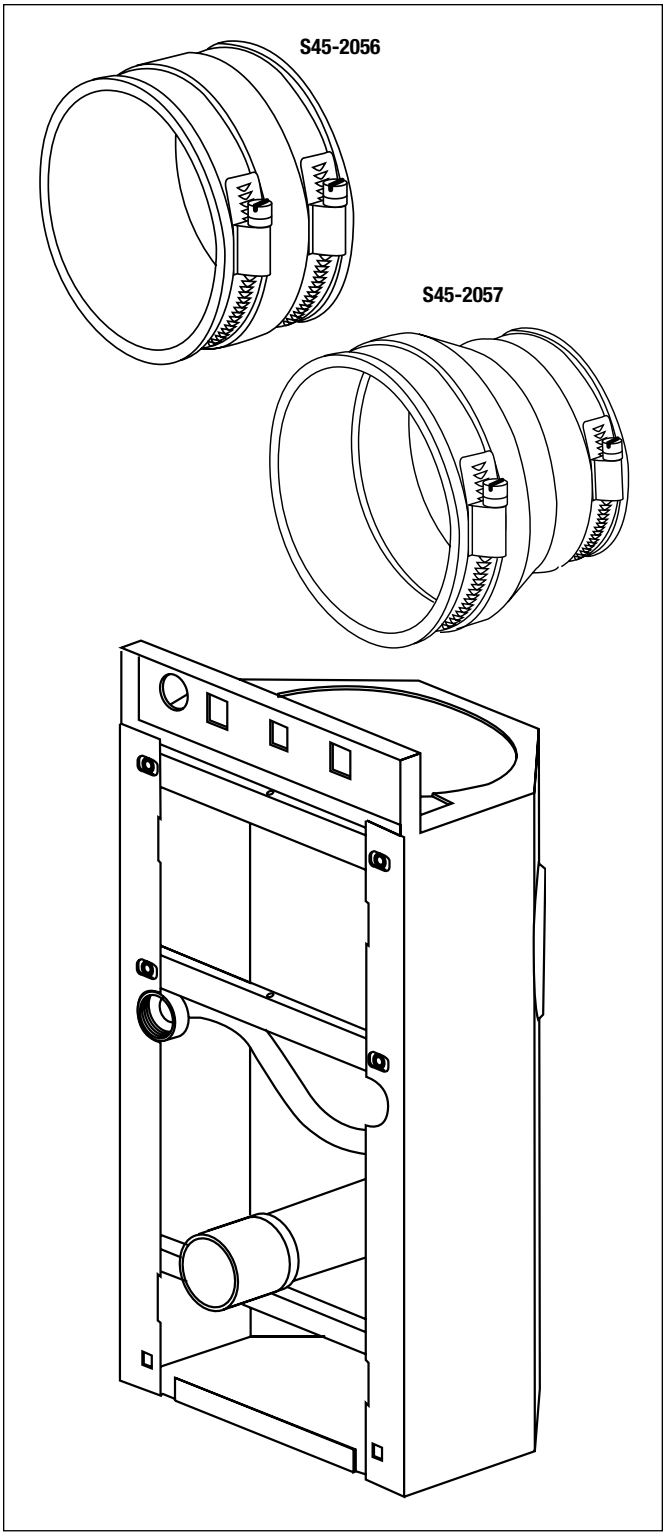

© 2024 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com