
WashBar® Brushless Motor Retrofit Instructions
S39-863

Removing the Brushed Motor (S39-859)

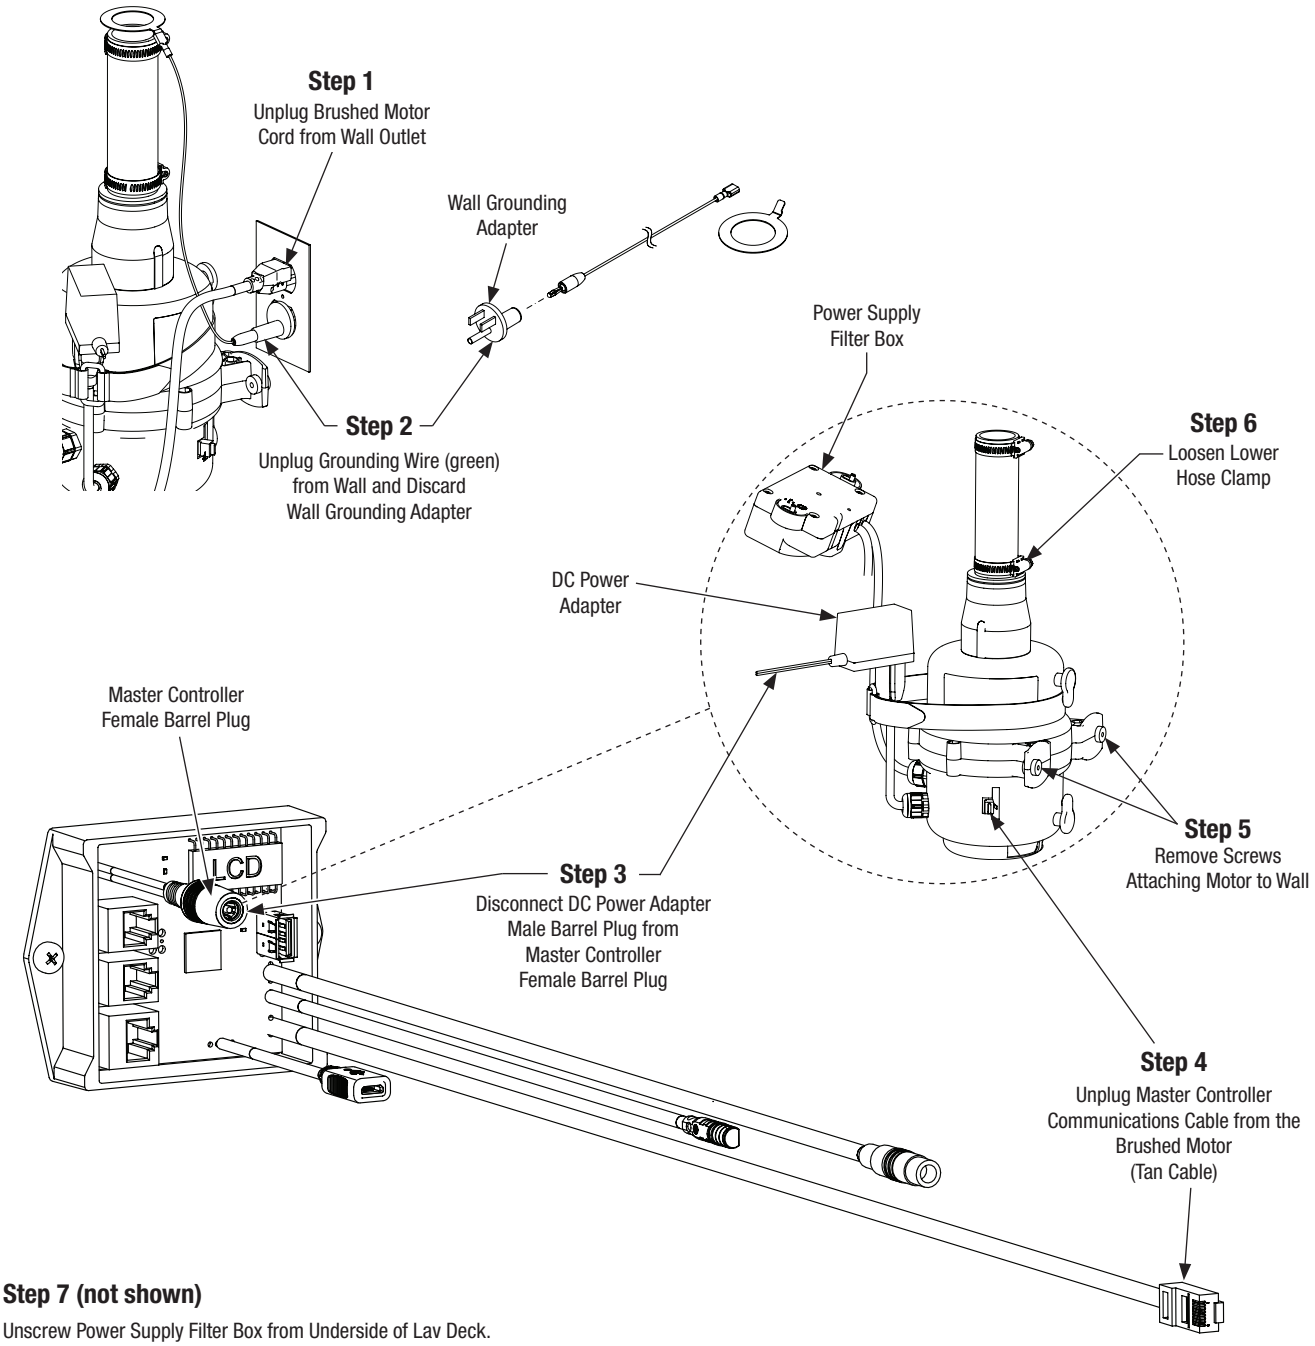

Step 7 (not shown)

Unscrew Power Supply Filter Box from Underside of Lav Deck.

Step 8 (not shown)

Remove and Discard Brushed Motor along with DC Power Adapter

© 2023 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com


Installing the Brushless Motor (S39-863)

Step 1

Set Brushless Motor in place. Ensure Hose is Seated all the Over the Nozzle and Tighten Lower Hose Clamp.

Step 5 (not shown)

Fasten Power Supply Filter Box to Underside of Lav Deck.

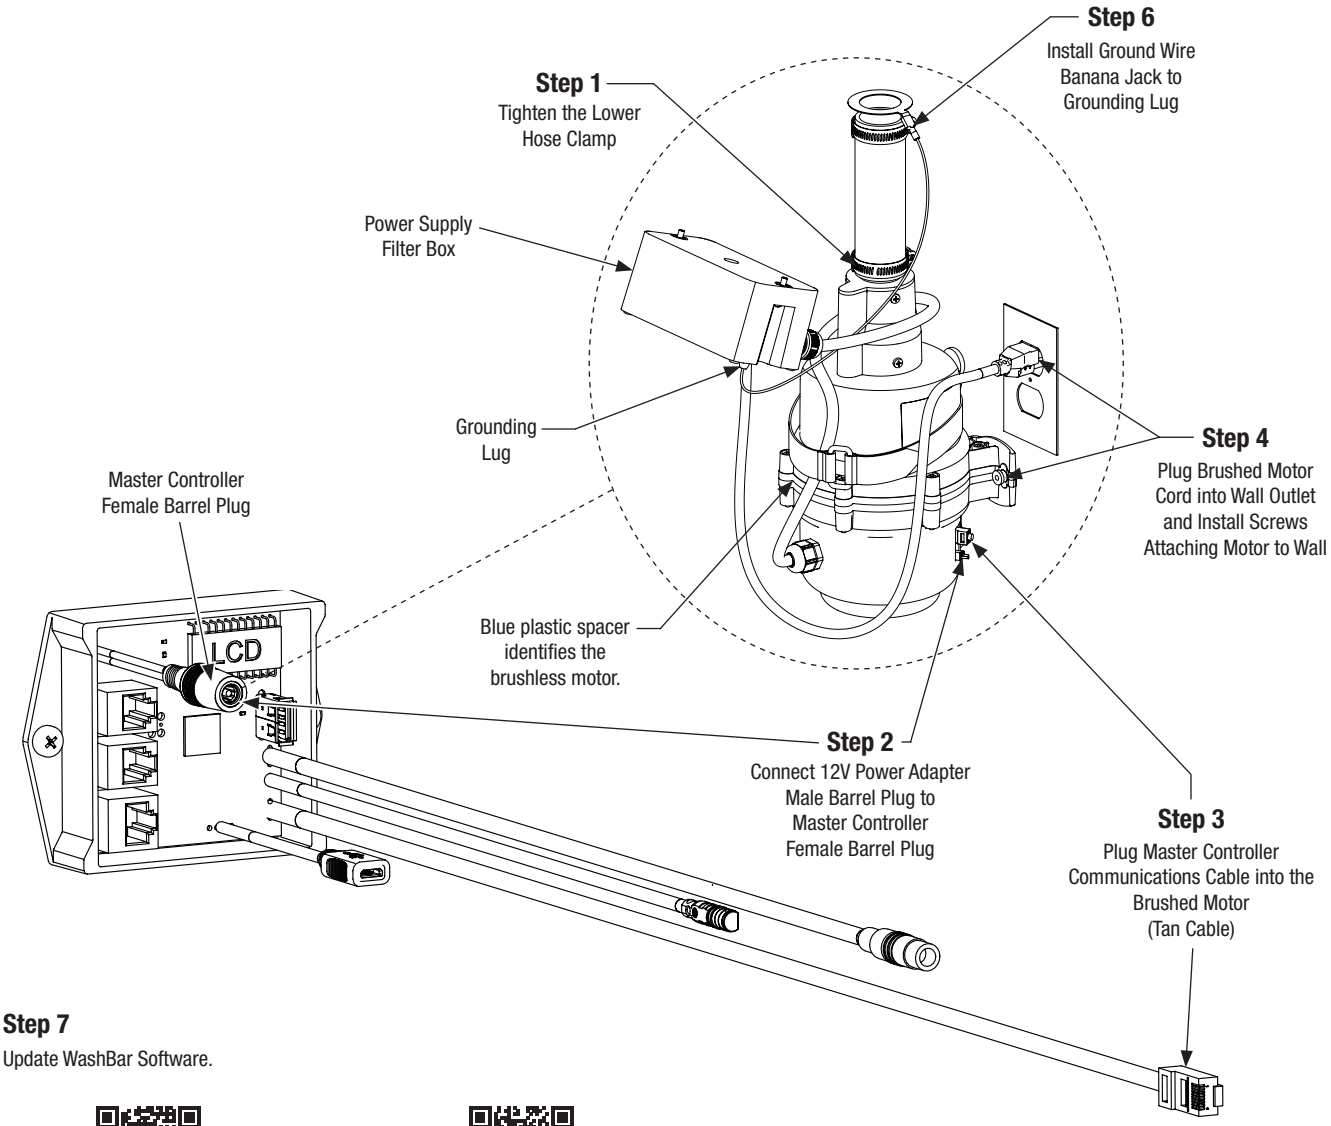

Step 7

Update WashBar Software.

Scan or click code to view Software Update Instructions

Scan or click code to view video of How to Update WashBar Software

© 2023 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com