



A WATTS Brand

S19-120, S19-120A, S19-120SS

Drench Shower with Horizontal Supply

- Exceeds American National Standard Z358.1 Specifications
- Exceeds Australia/New Zealand AS4775 & AS/NZS 4020
- Easily Mounts to Wall
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- Certified by IAPMO OCEANA to AS4775 and AS/NZS 4020

Specifications

Impact-resistant plastic shower head is colored bright yellow for high visibility in emergency situations. Also available in corrosion resistant stainless steel. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BradTect® safety yellow coating. Model S19-120SS is all stainless steel construction.



Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.


Model	Description
○ S19-120	Drench Shower w/Horizontal Supply, Plastic Showerhead
○ S19-120A	Drench Shower w/Horizontal Supply, Plastic Showerhead w/ Stainless Steel Shroud
○ S19-120SS	Drench Shower w/Horizontal Supply, All-Stainless Steel Fixture
○ S19-120SSZ	Drench Shower w/Horizontal Supply, All-Stainless Steel Fixture w/ BSPP Connection/Certified to AS4775 & AS4020
○ S19-2150	Navigator EFX20 - Emergency Thermostatic Mixing Valve

Tepid Water Options

[Navigator S19-2150 EFX20
Emergency Thermostatic Mixing Valve](#)




[Keltech SNA-Series
Tankless Water Heater](#)




NAVIGATOR


Satisfies ANSI/ISEA Z358.1 tepid water requirements.

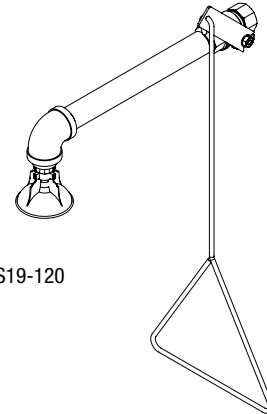

Model S19-120

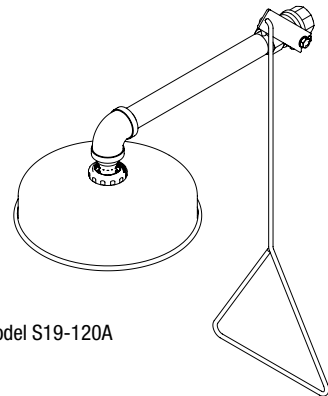

Model S19-120A

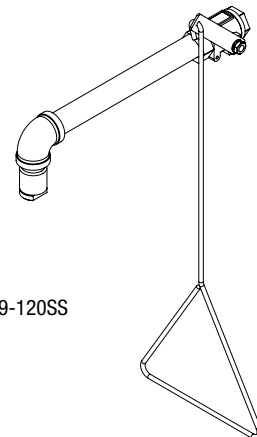

Model S19-120SS

© 2024 Bradley



A WATTS Brand


S19-120, S19-120A, S19-120SS

Drench Shower with Horizontal Supply

Standard Equipment

SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic (Model S19-120A includes a 10¾" [273mm] diameter corrosion-resistant stainless steel shroud). High performance corrosion-resistant stainless steel showerhead measures 1½" (38mm) in diameter (Model S19-120SS only). SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

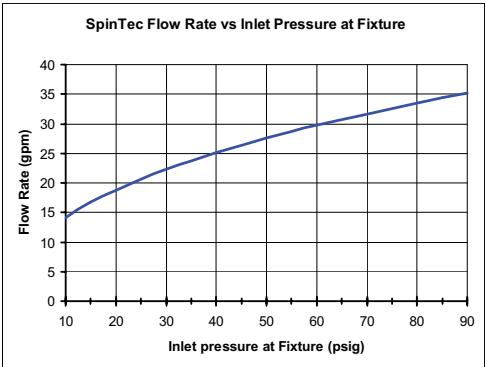

Valve

Chrome-plated brass 1" NPT stay-open ball valve, operated by stainless steel pull rod with triangular handle. Model S19-120SS is all stainless steel.

Pipe and Fittings

1¼" galvanized steel with BradTect® safety yellow coating. S19-120SS is all stainless steel.

Water Supply

1" NPT Horizontal (BSPP model only)






Local codes may require the installation of a backflow prevention valve to complete proper installation. Compliance with local codes is the responsibility of the installer. Valve must be tested annually to verify that it is functioning properly. Backflow prevention valves are not included with the fixture and may be supplied by the contractor or purchased from Bradley Corporation.



A WATTS Brand

S19-120, S19-120A, S19-120SS

Drench Shower with Horizontal Supply

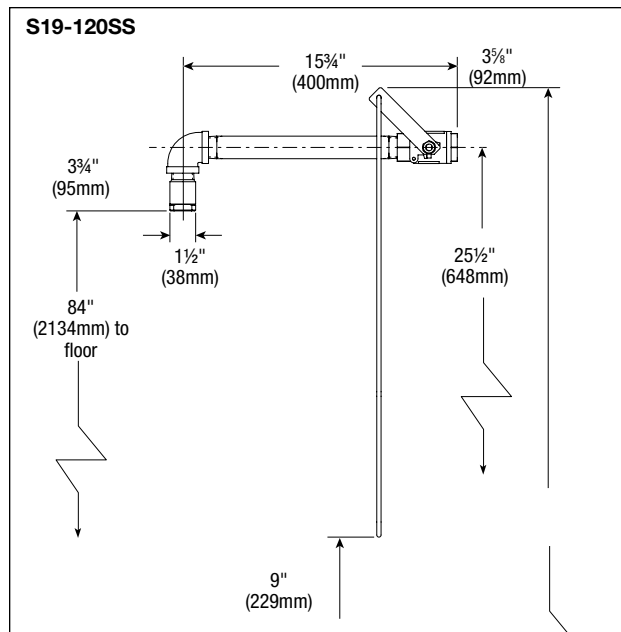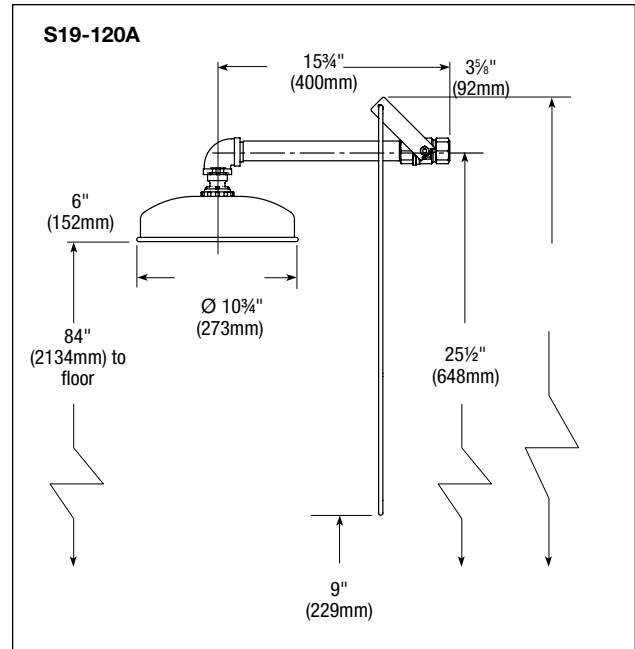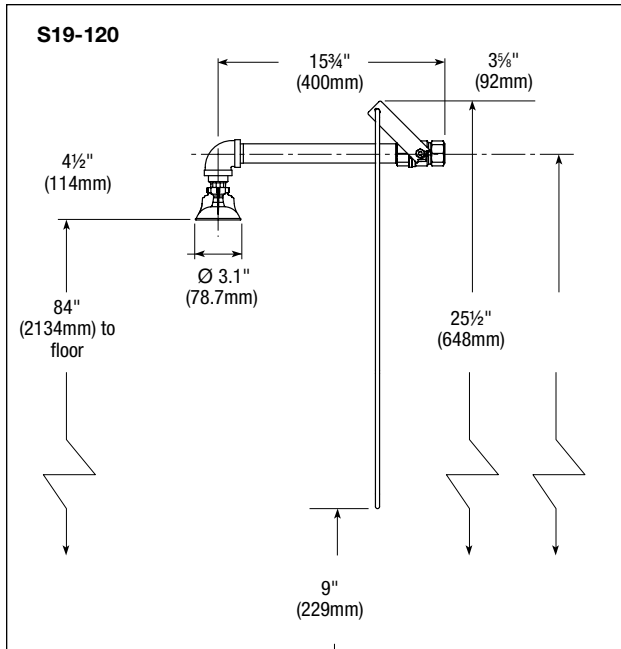

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).