



A WATTS Brand

S19-110BF, S19-110BFSS Freestanding Drench Shower

- Exceeds American National Standard Z358.1 Specifications
- Exceeds Australia/New Zealand AS4775 & AS/NZS 4020
- Galvanized Steel Protected with BradTect® Safety Yellow Coating or All Stainless Steel (S19-110BFSS)
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- Certified by IAPMO OCEANA to AS4775 and AS/NZS 4020



Specifications

Designed for locations where wall-mounted showers are impractical. Shower provides a superior washdown with a more even spray pattern when the operating handle is pulled.




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Standard Equipment

SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. High performance corrosion-resistant stainless steel showerhead measures 1½" (38mm) in diameter (S19-110BFSS). SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

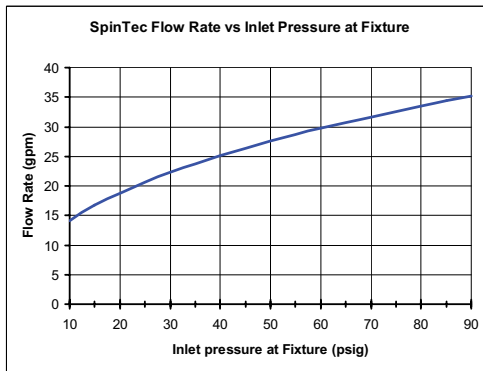

Valve

Chrome-plated brass 1" NPT stay-open ball valve, operated by stainless steel pull rod with triangular handle. Model S19-110BFSS is all stainless steel.


Pipe and Fittings

1¼" galvanized steel with BradTect® safety yellow coating. S19-110BFSS is all stainless steel.

Water Supply


1¼" NPT (BSPP model only)

Model	Description
S19-110BF	Freestanding Drench Shower (barrier-free model)
S19-110BFSS	Freestanding Drench Shower (barrier-free model), All Stainless Steel
S19-110BFSSZ	Freestanding Drench Shower (barrier-free model), All Stainless Steel w/ BSPP Connection/Certified to AS4775 & AS4020
S19-2150	Navigator EFX20 - Emergency Thermostatic Mixing Valve

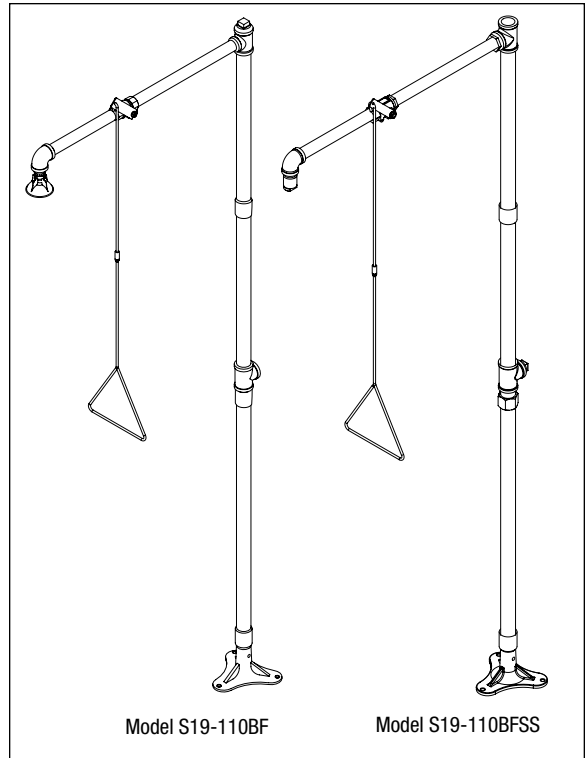


Tepid Water Options

[Navigator S19-2150 EFX20](#)
Emergency Thermostatic Mixing Valve



[Keltech SNA-Series](#)
Tankless Water Heater

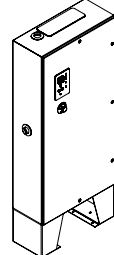

NAVIGATOR


Satisfies ANSI/ISEA Z358.1 tepid water requirements.



A WATTS Brand


S19-110BF, S19-110BFSS Freestanding Drench Shower

S19-110BF

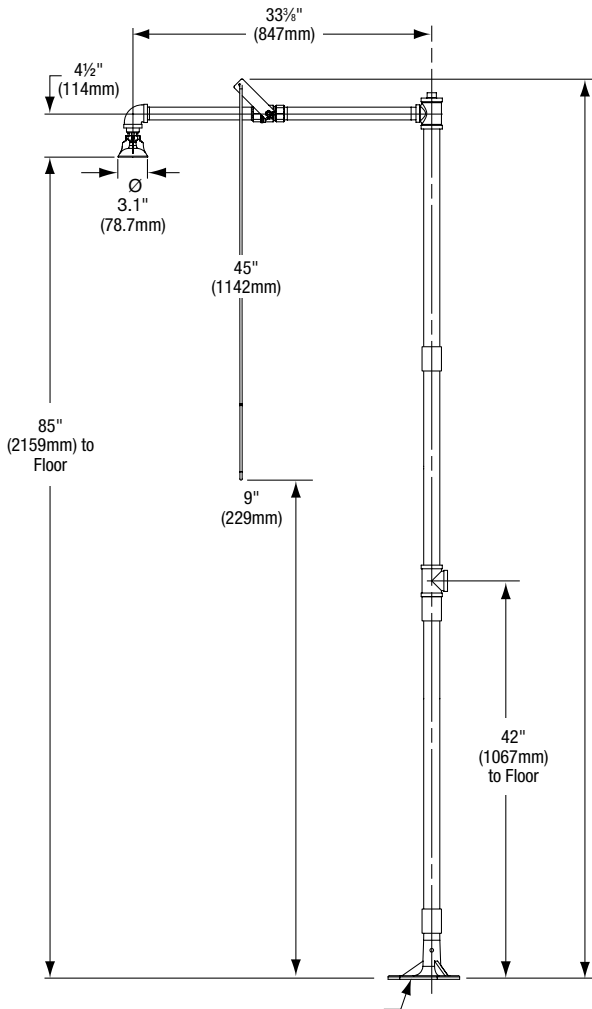

Ø 9" (229mm) Flange with (3)
 Ø 3/8" (10mm) Holes on Ø 8"
 (203mm) Bolt Circle

S19-110BFSS

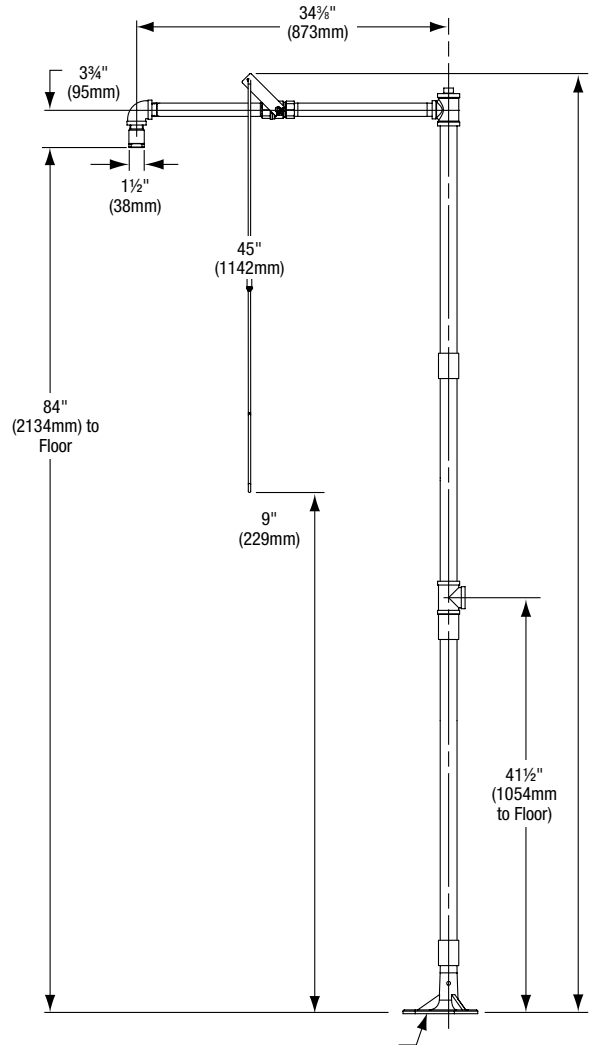

Ø 9" (229mm) Flange with (3)
 Ø 3/8" (10mm) Holes on Ø 8"
 (203mm) Bolt Circle



All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).