

First use

1. Pull out the inner drawer gently and use the spare key to open the drawer by rotating it 90 degrees, then pull out the key.
2. Open the battery box, install 4 x AA batteries, and then power them on for use.
3. Touch the touch screen area to activate the system, enter the initial password 1234 in the number button area, press the "#" key to confirm, and the drawer will automatically pop up

Set/Modify Password

1. Press the settings button once
2. Enter initial password/administrator password (administrator password is the password set for the first time)
3.  light flashing, enter the new password twice (4-6 digits, press the "#" key to confirm)
4.  light is dormant after one second, which means that the entry is successful.
5. flashing  light indicates failure.

Set/Add fingerprint

1. Press the settings button once
2. Enter initial password/administrator password (administrator password is the password set for the first time)
3.  light flashing, Press the fingerprint four times from multiple angles with your fingers
4.  light is dormant after one second, which means that the entry is successful.
5. flashing  light indicates failure.

Clear fingerprint and password

Long press the setting button for more than 10 seconds, after two consecutive short beeps, the system is cleared, after completion, long beep once, and the light is on and flashes 3 times, the system hibernates and restores factory  settings

(Low battery reminder: Please replace the battery promptly when  the flashes)

VI. After-sales service:

Dear users:

Thank you for purchasing and using this product! (the warranty period is one year).

The following scope does not belong to the free service scope:

- (1) Exceeding the one year warranty period;
- (2) The user loses the key or places it in the box;
- (3) damage caused by failure to use, maintain and store according to product instructions ;
- (4) caused by human violence or force majeure factors
- (5) Unauthorized alteration of the warranty card;
- (6) The product model number on the warranty card is inconsistent with the commodity number ;

Product Instructions

The password drawer cannot be installed at the bottom, and a key unlocking space needs to be reserved at the bottom



Thank you for using our products, please read the instructions carefully before installing.

Instructions and spare keys do not put in the safe

I. Product paramrters:

Model name: password drawer
Working power supply:
AA Alkaline batteries 4 pieces
Start mode:

Gear motor + Mechanical transmission
Number of users: 10 passwords, 40 fingerprints
(The first three are administrators)

Working voltage: 3.5V-6.5V
Working temperature: -20°C to +70°C.
Relative humidity: 30% RH~85% RH
Password length: 4-6 digits

II. Specifications:

Model NO	Size(Width×depth×height)(mm)	Cabinet size(Width×depth×height)(mm)	Type
D5-400	400×400×150	400×420×152	standard
D5-464	464×400×150	464×420×152	standard
D5-480	480×400×150	480×420×152	standard
D5-564	564×400×150	564×420×152	standard
D5-580	580×400×150	580×420×152	standard
D5-764	764×400×150	764×420×152	standard


III. Attachment configuration:

1. Install the screw pack;
2. USB power cord and instructions;
3. Spare lock key;
4. Four 5 # batteries.

IV. Installation steps:

- Separate the drawer: take the drawer out of the box, please be careful and not to damage the inside of the drawer lock and electrical parts, do not touch the lock and other parts; (press and hold the middle part of the slide rails on both sides to pull the left side down and the right side up. Pull the slide rail to pull the drawer out)
- Install the outer box: put the box on the wardrobe, measure the position of the drawer, from the inside of the box to screws the box, locking the outer box
- Insert the drawer: Put inside the drawer, pay attention to align with the slide rail and push it slowly, don't push with strong. Drawer installation completed.
- Installation panel: find the center line of the panel, from inside to install two screws, with distance 64mm, and then put the panel to the corresponding hole in the drawer, close the drawer to check the panel and drawer position alignment, adjust the two screws to adjust the installation position of the panel, and finally from the drawer bothsides secure the screws, lock the drawer.

Product Assembly Instructions

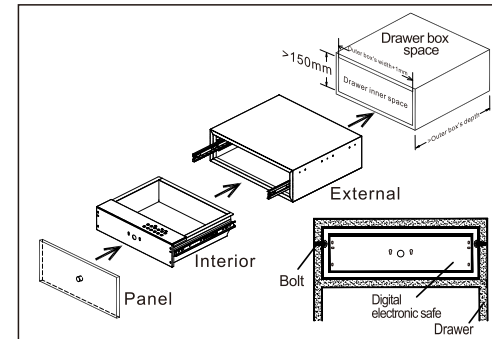

Precautions:
Please install horizontally when necessary,
The password drawer should be at least **20cm** above the ground!
Please keep the spare key and external power cord properly,
Avoid inserting password withdrawals!

V. Function part parsing:

NO.	Function name	Description
①	Fingerprint sensor	Semiconductor fingerprint controller
②	Touch-screen area	Tempered touchscreen glass touch to activate panel, (enter and set password) 🔋: low battery; 🔒: Password is correct. Initial password: *1234#; 🔓: Password is wrong, wait 3 sec to enter again
③	Internal Box	With separate divisions, beautiful, neat and convenient.
④	Reset button	Press the "RESET" button for 10 seconds to reset password. (RESET position is near the "🔒" button.)
⑤	Battery box	Place the power battery. (Note that the positive and negative directions.)
⑥	USB hole	Standby power plug (* no battery charging function*), you can use ordinary Mobile battery 3.7V to supply the drawer running.
⑦	Spare key	In the case users can not open with electronic mode, you can use the key to unlock, but the key need to be safe kept elsewhere. (* Don't put the key into the drawer*)

