



LED Flood Light Installation Instructions



WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

- This fixture should be installed by a licensed electrician only, abiding by all local and national electrical codes.
- Any alteration or modification of this product is forbidden and will void the product warranty.
- To prevent product malfunction and/or electrical shock, this product must be properly grounded.
- This luminaire is designed to operate in ambient temperatures ranging from -40°F to 113°F.
- MIN 167°F SUPPLY CONDUCTORS.

Yoke Mount Installation:

Step 1: Take the fixture out of the package.

Step 2: Using the screws provided, securely attach the fixture to the wall or ground through the holes of the bracket. (Fig 1&2).

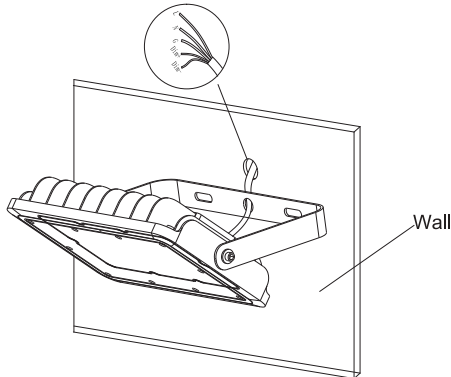


Fig 1

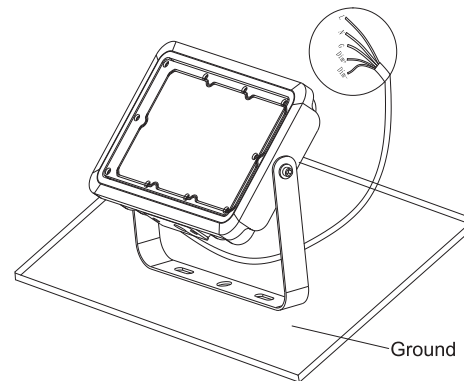


Fig 2

Step 3: Connect the wiring as per the wiring diagram below. (Fig 3)

Step 4: Loosen the screws on the two sides of the bracket to adjust the fixture to desired angle, then tighten the screw.

Step 5: Unscrew the cap to select the desired Watt/CCT/Photocell function, For setting the fixture to 15W/30W, refer to Fig 4. For 60W refer to Fig 5, then screw-on the cap.

Step 6: Turn on the electricity to verify everything is functioning properly.

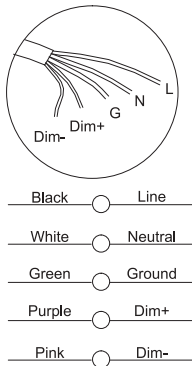


Fig 3

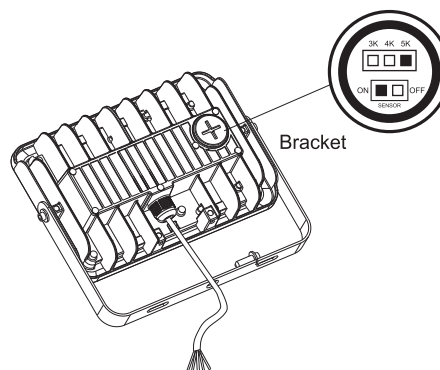


Fig 4

15W/30W

Factory Default Setting:
CCT:5000K, Photocell:ON

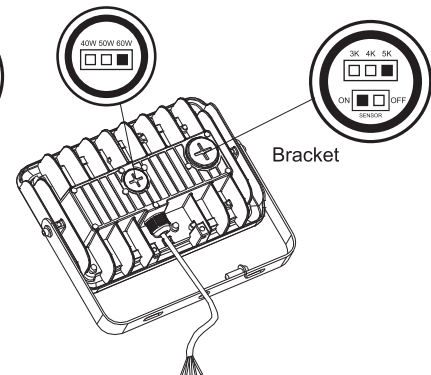


Fig 5

60W

Factory Default Setting:
Watt: 60W, CCT:5000K, Photocell:ON

For use with Morris #: 71531B, 71553B, 71532B, 71822B, 71533B, 71823B

Knuckle Mount Installation:

Step 1: Take the fixture out of the package.

Step 2: Insert the knuckle into the cover plate (not provided), and adjust the fixture to the desired angle. (Fig 1&2)

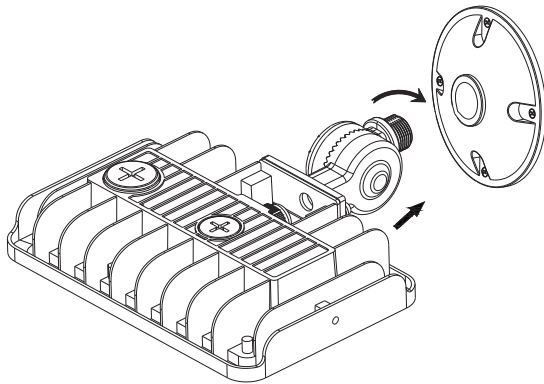


Fig 1

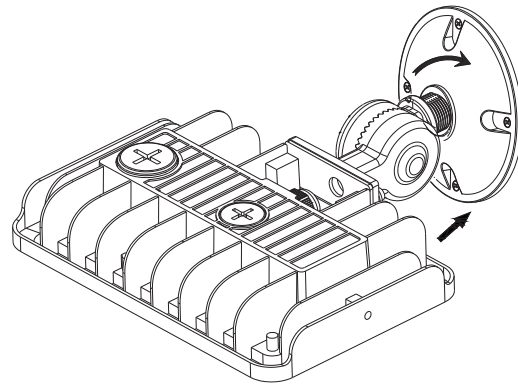


Fig 2

Step 3: Connect the wiring as per the wiring diagram below. (Fig 3)

Step 4: Unscrew the cap to select the desired Watt/CCT/Photocell function, For setting the fixture to 15W/30W. refer to Fig 4. For 60W refer to Fig 5, then screw-on the cap.

Step 5: Turn on the electricity to verify everything is functioning properly.

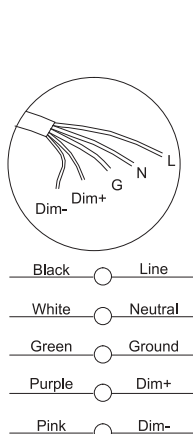


Fig 3

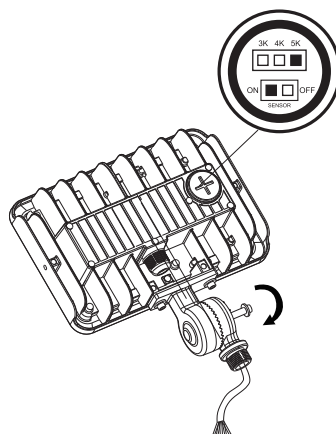


Fig 4

15W/30W

Factory Default Setting:
CCT:5000K, Photocell:ON

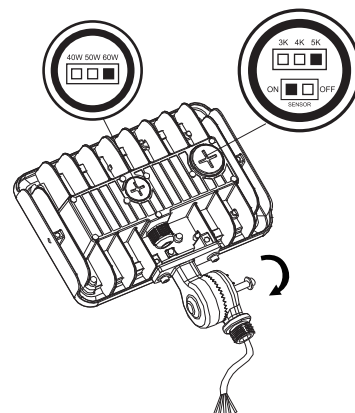


Fig 5

60W

Factory Default Setting:
Watt: 60W, CCT:5000K, Photocell:ON