



A WATTS Brand

S19-304XSD2 Halo™ Heat Trace Shower and Eye/Face Wash Unit

- NEMA 4X rated electrical enclosures
- Halo™ and SpinTec™ deliver the most effective shower and eye wash down coverage and spray pattern
- Ergonomic hand activation eyewash paddle - easy to reach from any direction
- Class I, Division 2, Groups B, C and D explosion proof units are standard
- Heat trace cable protects unit from freezing to -50°F (-46°C)
- Universal identification sign and inspection tag included
- Full, one-year warranty
- Halo is covered by one or more of the following patents: 9,700,484; 9,314,398; D662220; D673298; D662605; D685920; D662219; and D671228. Other Patents Pending.
- SpinTec™ showerheads are covered by one or more of the following patents: 8,113,446; 7,806,348; 8,490,895; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.

Specifications

Combination shower and eye/face wash unit is intended for use in Class I Division 2 areas where temperatures fall below freezing. Heat trace cable powered from 120V AC protects unit from freezing to -50°F (-46°C). Unit is encased in visible yellow ABS removable plastic shell. Shower valve operates quickly by a pull rod with a triangular handle. Shower valve operates quickly by a pull rod with a triangular handle and provides superior washdown. Eye/face wash is operated by a large push handle.





This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Tepid Water Options

[Navigator S19-2100_EFX25](#)
Emergency Thermostatic Mixing Valve

[Keltech SNA-Series](#)
Tankless Water Heater


NAVIGATOR



Satisfies ANSI/ISEA Z358.1 tepid water requirements.

Recommended Option:

[S19-324 Series Signaling Systems](#)



See all available options on
www.bradleycorp.com



Product Compliance

Classified by UL to:

- ANSI/ISEA Z358.1-2014

Listed by UL to:

- Uniform Plumbing Code (UPC)
- International Plumbing Code (IPC)



Models (Must select one)

Model

Description

☐ S19-304XSD2

Class I, Division 2 Halo Heat Trace Combination Unit, Top Supply with Indicator Lights, Stainless Steel Eye/Face Wash, Showerhead, Bowl w/ Cover and Pipe




A WATTS Brand

S19-304XSD2 Halo™ Heat Trace Shower and Eye/Face Wash Unit

Standard Equipment

SpinTec™ Showerhead

High performance Type 304 corrosion-resistant stainless steel showerhead measures 1½" (38mm) in diameter. SpinTec drench showerhead features integral 22 gpm (83.3 Lpm) flow control (exceeds minimum water flow of 20 gpm (75.7 Lpm) at 30 psi (2.0 bar)), conserving water and helping to accurately size your tepid water system.

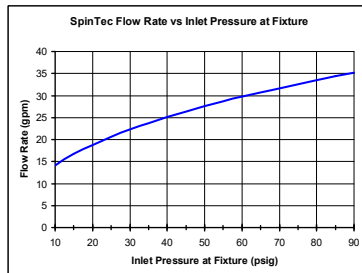

Shower and Eye/Face Wash Ball Valves

1" shower ball valve and ½" stay-open eye and eye/face wash valve manufactured of the following material and supplied with Type 304 stainless steel pull rod and handle:

- Type 316 stainless steel ball valve

Eye/Face Wash

The Halo eye/face wash system offers a high performance rinsing platform that provides rapid relief to an individual's eyes and face that have been injured by chemicals or particulate. This system provides the most complete face wash available in the market. The eye/face wash includes an integral 5.1 gpm (19.2 Lpm) flow control, providing water at a safe velocity while maintaining its effectiveness (exceeds minimum water flow of 3.0 gpm (11.4 Lpm) at 30 psi (2.0 bar)). The eye/face wash is protected by a full bowl stainless steel dust cover that activates the unit when it is opened. Safe, steady water flow under varying water supply conditions from 30-90 psi (2.0-6.1 bar) is assured by integral flow control in the sprayhead assembly. Sprayheads are made from durable Type 316 stainless steel with electro-polished finish.

Bowl and Dust Cover

Bowl and dust cover are constructed of Type 304 corrosion-resistant stainless steel.

Pipe and Fittings

Piping to 1-1/4" NPT water supply inlet on unit. Piping to 1-1/4" NPT drain outlet.

1-1/4" piping assembly manufactured of one of the following materials:

- Type 304 corrosion resistant stainless steel

Electric Heat Trace Cable

Self-regulated to -50°F (-46°C), thermal rating; 5 watts/foot, service voltage; 120V AC; 0.7 AMP/80 watts at 50°F (10°C) unit water temperature. Heat trace cable wraps around pipe.

Indicator Lights

Rated for use in Class I, Division 2, groups B, C and D. Green indicator light signals power to the unit and Amber means the heating cable is on.

Pipe Insulation

¾" polyethylene vertical semi-slit.

Protective Outer Shell

Safety yellow ABS plastic with six removable sections for quick repairs and maintenance. Shell is sealed with rivets for added weather protection and is resistant to damage caused by chemicals and other harsh environmental conditions.

Freeze Protection Valve

Always included on heat trace unit. Ensures continual flow of water when internal temperatures drop below 35°F (2°C). Valve closes at 40°F (4°C). Maximum pressure rating is 200 psi.

Scald Protection Valve

Model S19-304XSD2 includes a scald protection valve. Intended for use where there is a risk of injury to an end user caused by elevated water temperatures. The scald valve will initiate flow when the thermostatic actuator senses 98°F (36.7°C) and will remain open as long as the discharge water temperature is above 95°F (35°C).

Thermostat

Located inside junction box. Ambient air temperature control thermostat opens at 64°F (18°C) and closes at 54°F (12°C).

Junction Box

Aluminum, with multiple hubs. Accepts 3/4" IPS conduit.

Water Supply

1-1/4" NPT (top supply).

Optional Equipment

Signaling System Ready

All units are designed so that a signaling system can be added at any time. Go to www.bradleycorp.com to order signaling system separately. Signaling system selected must match electrical class of heat trace product.



If a Class I Division 2 rating is required, each fixture needs to be accompanied by electrical accessories of a similar rating if those accessories are desired options.



Product is non-cancelable, non-returnable.



A WATTS Brand

S19-304XSD2 Halo™ Heat Trace Shower and Eye/Face Wash Unit

Dimensions for S19-304 (Model S19-304XSD2 shown)

(mm)



Class I, Division 2 indicator light will require 14" clearance from top of unit if installed in junction box top conduit hub.

