



Morris Products

LED High Bay Corn Light

Installation Instructions

CAT#'s: 71748A-71749A



CAUTION:

- Do not use an electric generator to test this LED fixture.
- Avoid using the led fixture in environment where there is smoke, sulfur, and corrosive substances.
- This fixture is to be installed by a licensed electrician only, abiding by all local and national electrical codes.

PARTS/COMPONENTS, INCLUDED IN BOX

- LED Fixture
- Installation Instructions


Installation Instructions:

Warning: Please make sure the power is off before installation.

1. Turn off the power switch.
 2. Unscrew the CFL/MFL/HPS. Figure (6)(7).
 3. Take out led corn light and attach as per: Figures (1)(2)(3).
- Figure (1):Regular lamp
- Figure (2):Lamp with motion sensor
- Figure (3):Lamp with PIR sensor.
4. Make proper wirining connections, as per the wiring diagram on page 3.

Note: Be sure to take off the ballast before installing this fixture. This fixture is to be installed by a qualified electrician only, abiding by all local and national electrical codes.

5. The lamp base can be adjusted to meet your requirements. Figure (4)
6. If you're using a security rope, securely attach the rope to the fixture,then attach the other end of the rope to the fixture housing. Figure (5).
7. Double check your wiring connections and turn on the power switch.

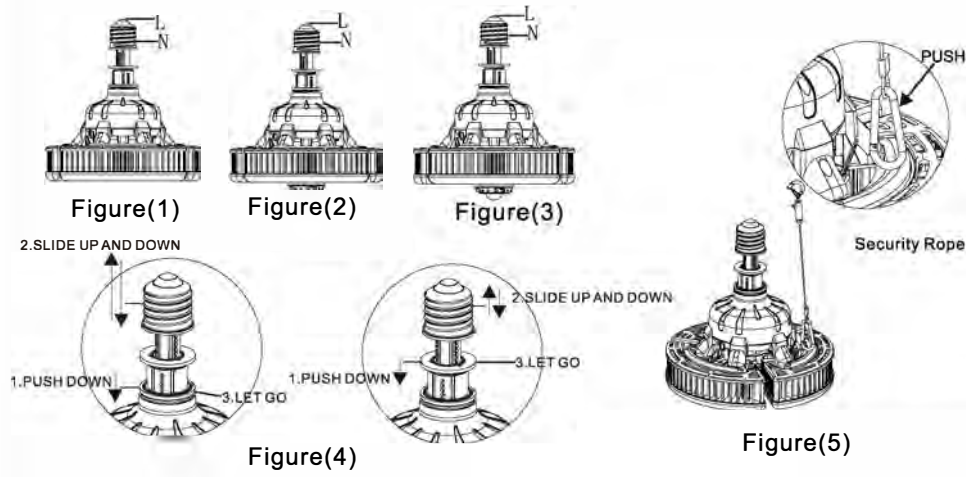

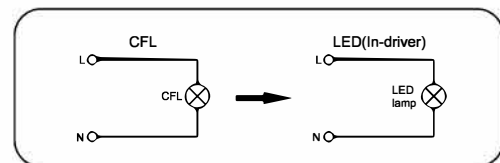


Figure (6)

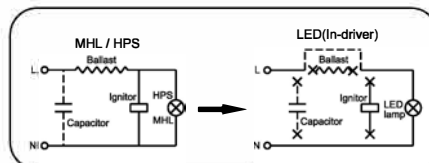


Figure (7)


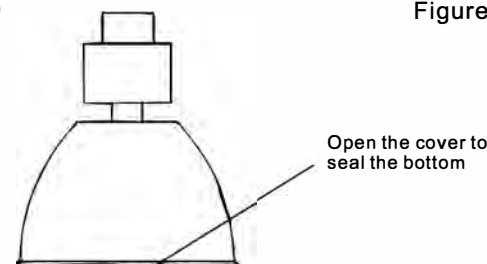


Figure (8)

Installation of Motion Sensor & PIR Sensor

Use a flat-head screwdriver(not included)to unscrew and remove the plug.
Securely tighten the sensor to the fixture.
Note: The motion sensor has no dialing code, and a remote control is needed to configure the sensor with custom settings. Please refer to the remote control programming instructions for more information.
If you're installing a Dimming Knob, twist the knob by hand to adjust the dimming to meet your requirements.

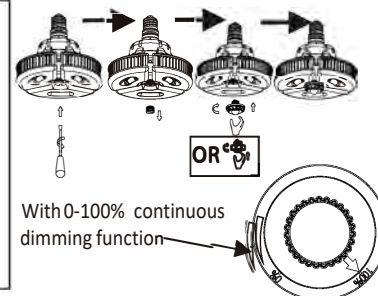

WARNING:

WARNING – RISK OF FIRE OR ELECTRIC SHOCK. LED RETROFIT KIT INSTALLATION REQUIRES KNOWLEDGE OF LUMINAIRES ELECTRICAL SYSTEMS. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.

WARNING – RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN THE LUMINAIRES THAT HAVE THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE.

WARNING – TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.

DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.

THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS. SUITABLE FOR DAMP LOCATIONS.

ADDED WEIGHT OF THE DEVICE MAY CAUSE INSTABILITY OF A FREE STANDING PORTABLE LUMINAIRE.

USE ONLY WITH A PORTABLE TABLE LAMP THAT IS PROVIDED WITH A SHADE.

USE IN PORTABLE TABLE LAMPS IN WHICH THE DISTANCE FROM THE BOTTOM OF THE BASE TO THE TOP OF THE LAMPHOLDER DOES NOT EXCEED THREE (3) TIMES THE MINIMUM BASE DIAMETER.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS” OR “NOT FOR EMERGENCY LIGHTING.

MIN. LAMP COMPARTMENT DIMENSIONS(L X W X H)