



A WATTS Brand

S19-2000 (EFX8), S19-2000EFX Emergency Fixture Thermostatic Mixing Valves

- Exceeds ANSI Z358.1
- ASSE 1071 Certified
- Reliable Liquid-Filled Thermostat with 10-Year Warranty
- Checkstops on Inlets
- Adjustable Set Point within Temperature Range
- Accurate Temperature Control to within $\pm 3^{\circ}$ F
- Built-in Cold Water Bypass, Assuring Cold Flow
- Positive Shutoff of Hot Supply When Cold Supply is Lost
- Easy Installation and Serviceability
- Dirt and Lime Resistant
- Dial Thermometer
- Factory Assembled and Tested
- Universal Mounting Capability
- Cabinet Features:
 - 18 Gauge Body & Door
 - Left-Hand Hinge
 - Cylinder Lock
 - Inlet/Outlet Knock-Out Holes for Mounting Flexibility
 - Stainless Steel or Baked White Enamel Finishes
 - Surface-Mounted or Recessed Style with Flange

Valve Specifications

Maximum Operating Pressure
125 PSI (860 kPa)

Maximum Inlet Temperature
180° F (82° C)

Recommended Inlet Temperature
120° F (49° C) – 140° F (60° C)

Temperature Range
Std. 65° F (18° C) to 95° F (35° C) **Set Point** 85° F (29° C)

Flow Capacities – GPM

Model	Min. Flow	Pressure Drop – PSI						
		5	10	15	20	30	45	60
S19-2000	1.5	3.0	4.0	5.0	6.0	7.3	9.0	10.5
Cold Bypass Only		2.3	3.2	4.0	4.6	5.6	6.8	7.7

Flow Capacities – L/Min

Model	Min. Flow	Pressure Drop – Bar						
		.5	1.0	1.5	2.0	2.5	3.0	4.0
S19-2000	5.5	13.5	19.0	23.5	27.0	30.5	33.5	38.5
Cold Bypass Only		10.5	14.5	18.0	21.0	23.5	25.5	29.5



This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.

Code Compliance and Certifications

ASSE 1071 & UPC certified.



Engineer's Approval _____

Page 1 of 3

1/19/2026

This information is subject to change without notice.

Bradley_TMV_Emergency_EFX8



S19-2000

Valve Model

Model

- ☐ S19-2000
☐ S19-2000EFX

Description

Emergency Fixture Thermostatic Mixing Valve
Emergency Fixture Thermostatic Mixing Valve for S19294JB & S19294JBT Only

Configurable Valve Model (select one)

Model

- ☐ EFX8
☐ CAB-EFX8

Description

EFX8 Thermostatic Mixing Valve with Options
EFX8 Thermostatic Mixing Valve **Cabinet Only**

Optional Valve Selections

Finish

- ☐ R Rough Brass (standard)
☐ C Chrome Plated

Bracket

- ☐ B Wall Mounting Bracket
☐ 0 None

Optional Cabinet Selections

Cabinets (includes bracket)

- ☐ SS Surface Mount Stainless Steel
☐ RS Recessed Stainless Steel
☐ SE Surface Mount White Enamel
☐ RE Recessed White Enamel
☐ 0 None

Window

- ☐ W Plexi-Glass Window in Door
☐ 0 None

Application

[Eye or Eye/Face Wash](#)



Complies with ANSI/ISEA Z358.1

© 2026 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




A WATTS Brand

S19-2000 (EFX8), S19-2000EFX Emergency Fixture Thermostatic Mixing Valves


Dimensions

(mm)

Front View

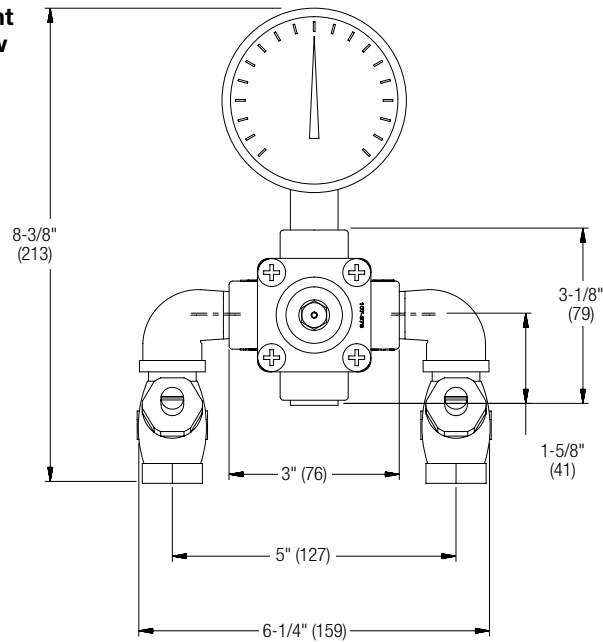


Side View

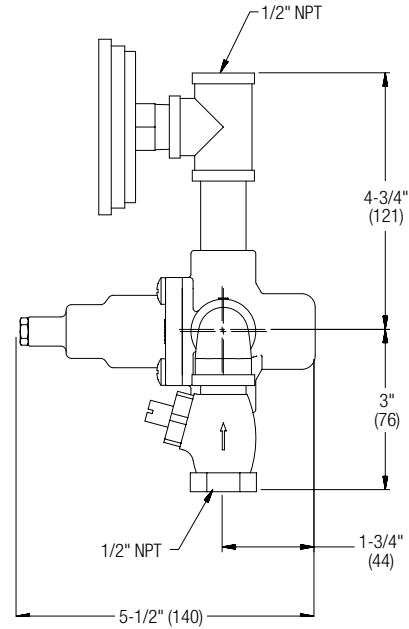


Dimensions — S19-2000 Recessed Cabinet

Front View

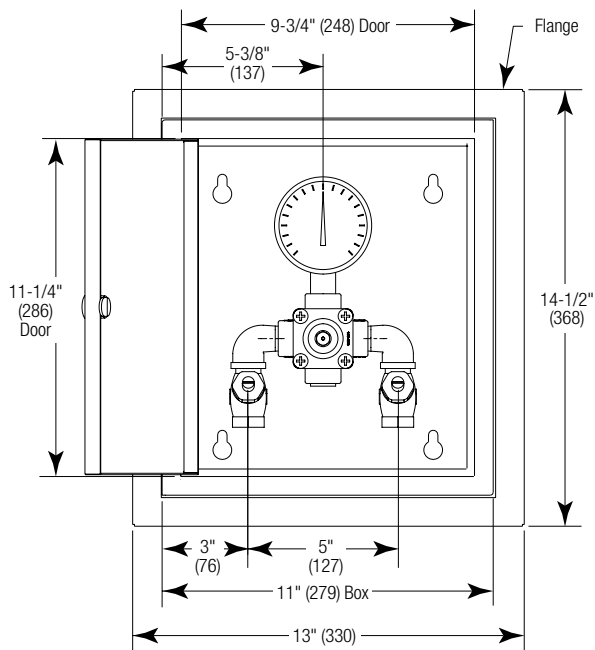

Side View

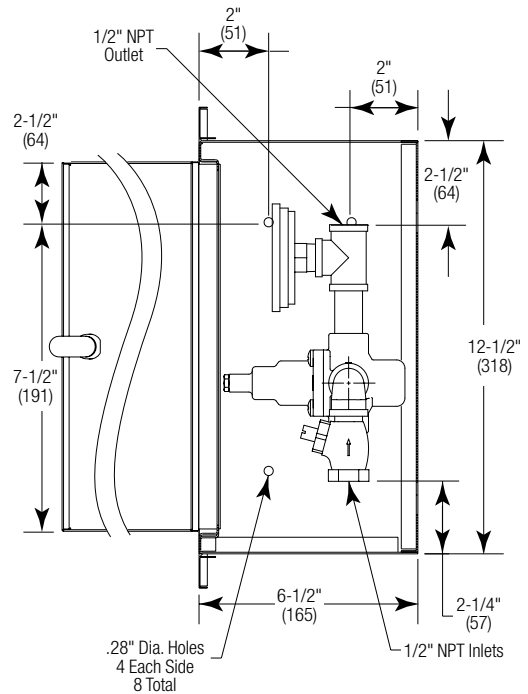



(mm)

Front View



*Bottom View Is the Same
for Both Surface-Mounted
and Recessed Dimensions.*