


UNDER CABINET LIGHTING

BLADE SURFACE PROFILE

Control: Decora Bluetooth Wall Dimmer



POWER SUPPLY INSTALLATION: PLUG-IN OR HARDWIRE

- Blade profile, 78 3/4" (2 m) L, easily cut with a miter saw.
- Blade profile dimensions: 13/16" (21 mm) W x 3/8" (10 mm) H.
- FlexyLED UHE6B PW is a LED strip with 280 LED/m on a circuit 1/4" (6 mm) W.
- FlexyLED UHE6B PW available in fixed lengths (trimmable): 19 11/16" (500 mm), 39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm).
- Kits recommended for a 96" counter.
- 78" power cable is pre-wired to the FlexyLED UHE6B PW.
- Extension cables are available in 20", 40" and 78".
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Power supply features optional plug-in installation with detachable power cable.*

STARTER KIT


Order the quantities below for each part number to complete 1 kit shown in the installation layout.



Qty.	No.	Description
4	1670240512419	FlexyLED UHE6B PW, 4000 K warm white, 19 11/16" (500 mm), 5W, 24V
1	4123079900	Blade aluminum surface profile, 78 3/4" length, black finish
4	4123600	Blade mounting clips, 2-pack
4	4123010	Blade end caps, aluminum finish 2-pack
1	DH2424	Dimmable power supply, 24W, 24V plug-in or hardwire
1	109D00101	Decora bluetooth digital dimmer with white, ivory and light almond face plates
2	247901562	Extension cable, 78 3/4" (2 m) length, 2-pack, 24V

INSTALLATION LAYOUT


Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

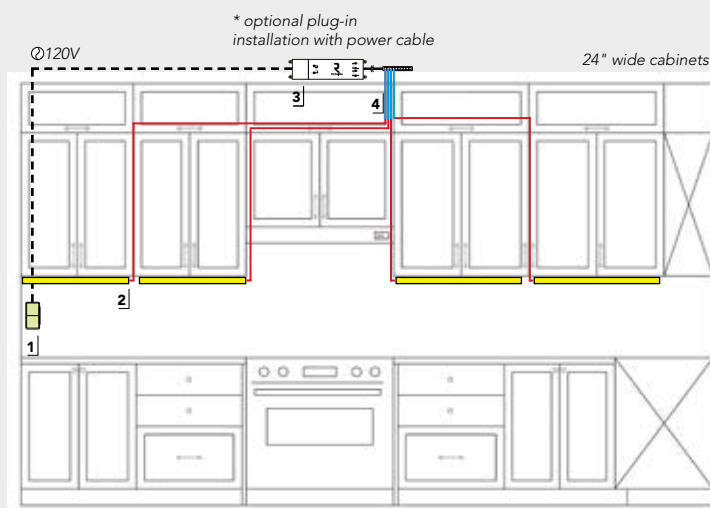

1. Decora dimmer, 109D00101.
2. Blade profile, 4123079900 and FlexyLED UHE6B PW, 1670240512419.
3. Power supply, DH2424.
4. Extension cable, 247901562.

----- 120V wire supplied by others

LED

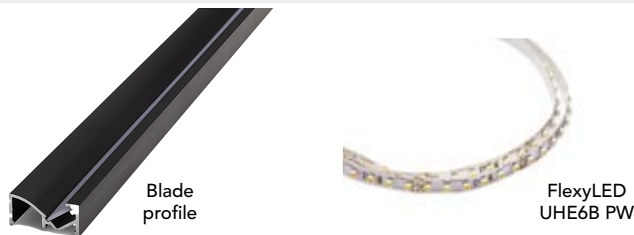

POWER SUPPLY



CONTROL

Decora bluetooth wall dimmer



Face plate finishes, included

