


CORNER CABINET LIGHTING

FLEXYLED SEH4

Control: X-Driver IR WI-XD Wireless Sensor



POWER SUPPLY INSTALLATION: PLUG-IN

- Available in fixed lengths (trimmable):
39 3/8" (1000 mm), 59 1/16" (1500 mm), 78 3/4" (2000 mm),
98 7/16" (2500 mm), 118 1/8" (3000 mm).
- Silicone coated LED with 180 LED/meter; 9.6 watts/meter.
- Recess into a groove measuring 4 mm wide x 8 mm deep.
- Kits recommended for a 34 1/2" height base cabinet.
- 78" power cable is pre-wired at each end of the roll.
- Cut off unused wire at designated marks.
- IR WI-XD is a self-powered wireless proximity sensor (with lithium battery CR2450).
- Recommended to only go a distance of 24-ft from the light to the power supply.
- Run low voltage wiring between the LED and power supply (supplied by others). Terminal connectors are included.

LED



FlexyLED SEH4


POWER SUPPLY



X-Driver
power supply

X-Driver
power cable

CONTROL

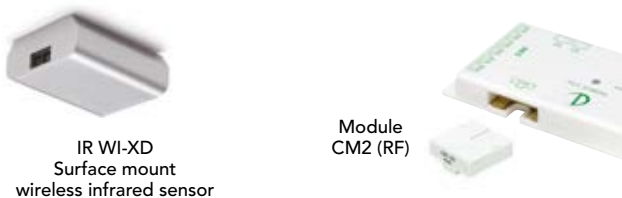

IR WI-XD
Surface mount
wireless infrared sensor

Module
CM2 (RF)

STARTER KIT


Order the quantities below for each part number to complete 1 kit shown in the installation layout.




Qty.	No.	Description
2	13002410124040	FlexyLED SEH4, 4200 K neutral white, 39 3/8" length (1000 mm), 9.6W, 24V
1	1650703010	IR WI-XD on/off wireless sensor for X-Driver, Aluminum finish
1	1650301	CM2-XD RF control module
1	XDRIVER2430	X-Driver power supply, 30W, 24V
1	24064562	Extension male connection to terminal, 6" (150 mm), white connector, 2-pack, 24V
1	24066562	Extension female connection to terminal, 6" (150 mm), white connector, 2-pack, 24V

INSTALLATION LAYOUT

Product installation must be done in accordance with local electrical codes, please confirm with an electrician or inspection office.

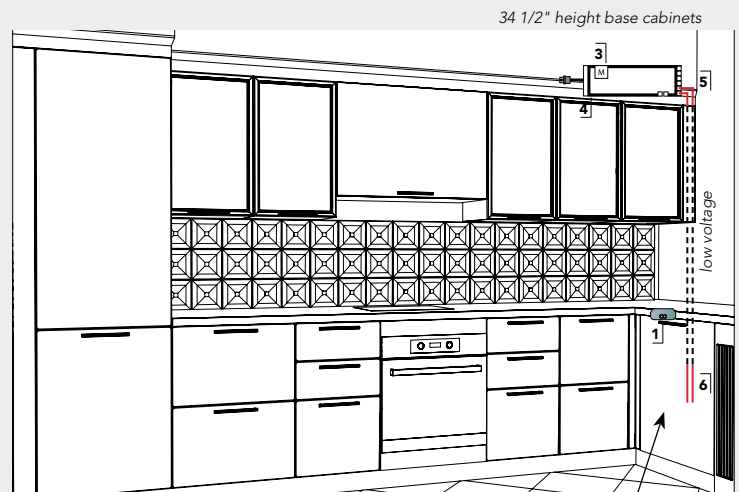

1. IR Sensor, 1650703010.
2. FlexyLED SEH4, 13002410124040.
3. Control module (CM2-XD), 1650301.
4. X-Driver power supply, XDRIVER2430.
5. Extension male connector, 24064562.
6. Extension female connector, 24066562.



----- low voltage wire supplied by others