S45-2033A, S45-2128A
Air Single Temperature Self-Closing Valve

Model Number	Description
○ S45-2033A	Air Single Temperature Self-Closing Valve with Flow Control
○ S45-2128A	Air Single Temperature Self-Closing Valve without Flow Control

- Reliable Performance
- Individual Checks Between Each Valve
- Serviceable from Pipe Chase

Specifications

Materials

Valve bodies are of forged brass. Push buttons are stainless steel. Air tubing from push button to valve is plastic tubing. Escutcheons are chrome-plated brass.


Construction

Push button escutcheons are keyed into backsplash to prevent rotation. Push buttons turn freely and cannot be removed from the front. No exposed fasteners. Valves are serviceable from pipe chase.


Standard Equipment

Bradley series pneumatically operated self-closing valve features a hold open push button. The pneumatic actuator is independent of the water supply line. 0.4 GPM flow control is standard on valve. Each valve incorporates a check, strainer and stop as standard. Valving is easily serviced from the piping chase.


Push buttons and escutcheons for Bradley series valve manifolds are included. Filler/spout must be ordered separately.

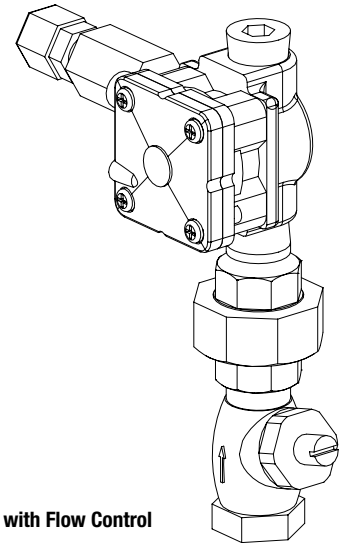

S45-2033A with Flow Control

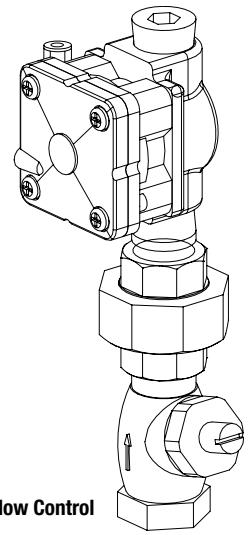

S45-2128A without Flow Control

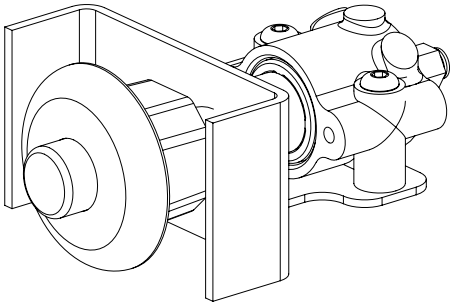

Piston-Operated Security Push Button
(Supplied with Both S45-2033A, S45-2128A)

© 2024 Bradley

This information is subject to change without notice.

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com