


**NEW**

# WINDOW SYSTEMS

## SERIES 7600 CONCEALED VENT WINDOW




- AAMA CW100-Rated
- Minimal Sightline
- Structural Silicone Glazed
- 1" (25 mm) Glazing
- Reinforced Corner Construction
- Use With Storefront or Curtain Wall
- Thermally Broken
- U-Factor 0.56 to 0.34
- Multi-Point Euro Hardware Locking Handles
- IW7600 Hurricane Resistant Version Available
- BW7600 Blast Mitigation Version Available


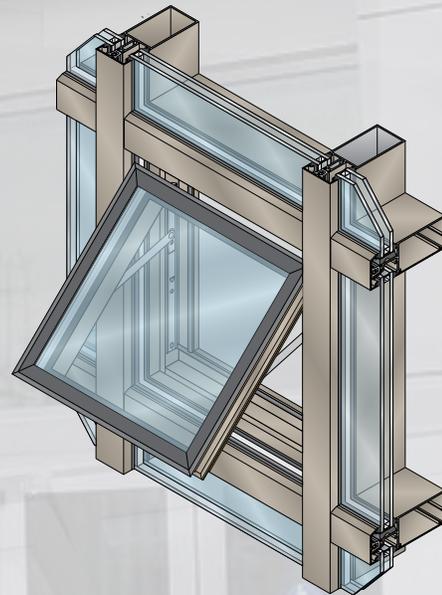


The Series 7600 Concealed Vent is a minimal site line window perfect for use in Storefront, Ribbon Window and Curtain Wall openings. Standard hardware includes a single Multi-Point Locking Handle. As with all of our operable windows, vent construction starts with tubular vent components that are Mitered, Reinforced with Corner Keys, and Crimped at all corners. When closed, the vent is sealed to the frame with bulb gaskets ensuring an air tight seal. The impact version requires 1" (25 mm) laminated glass.

# SERIES 7600 WINDOW TYPICAL DETAILS

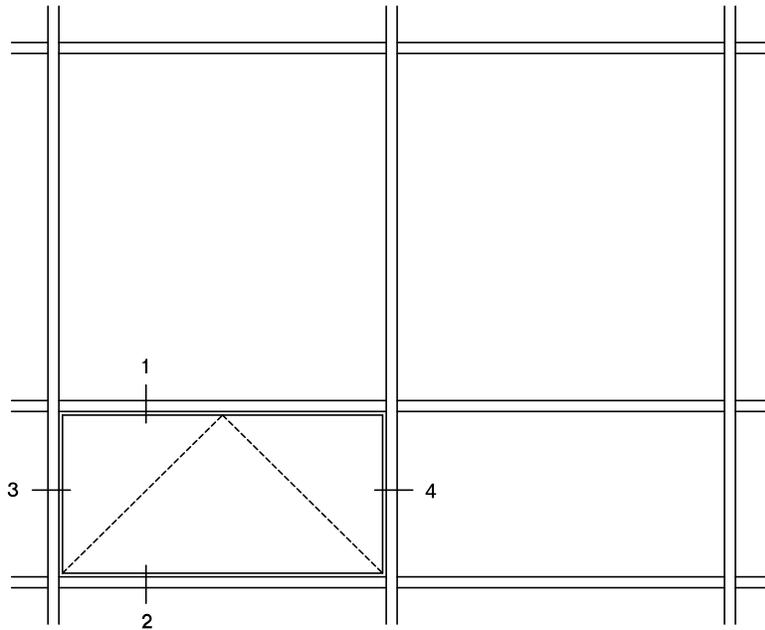

TYPICAL ELEVATION

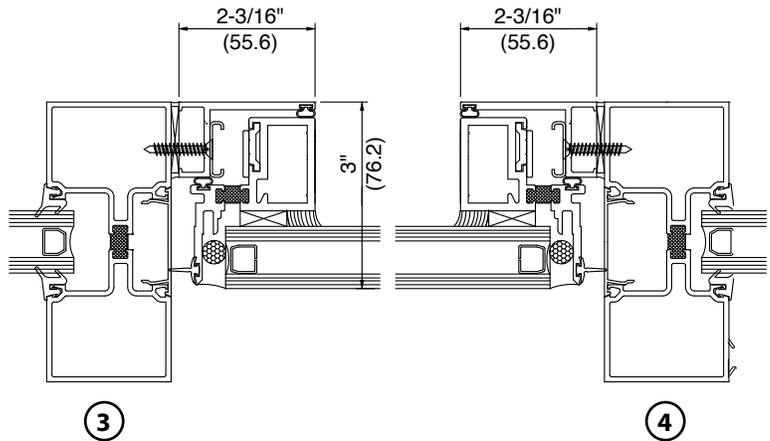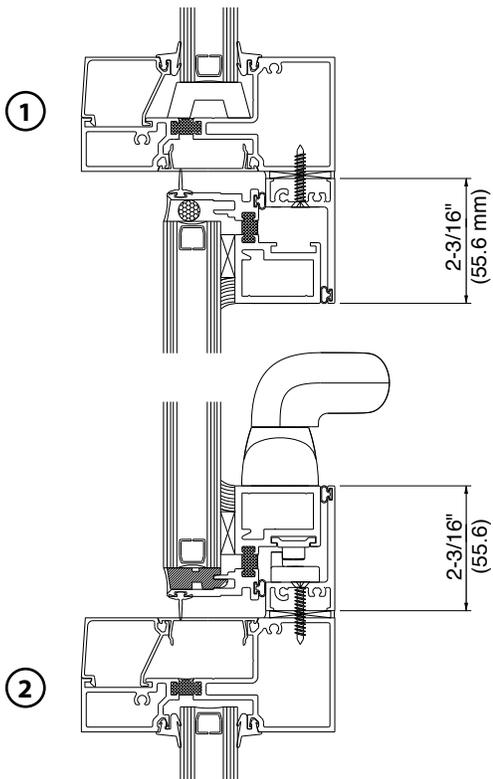

## EURO MULTI-POINT LOCKING HANDLES



- Finishes Available:
- Powder Coat White
  - Powder Coat Black
  - Satin Nickel
  - Satin Chrome

For Specifications, Details, and Testing Data go to [usalum.com](http://usalum.com).

NOT TO SCALE