
HÄFELE

Sliding Door Fittings **Unotec Home** Planning


for wood doors (max. 1 3/4” thickness)

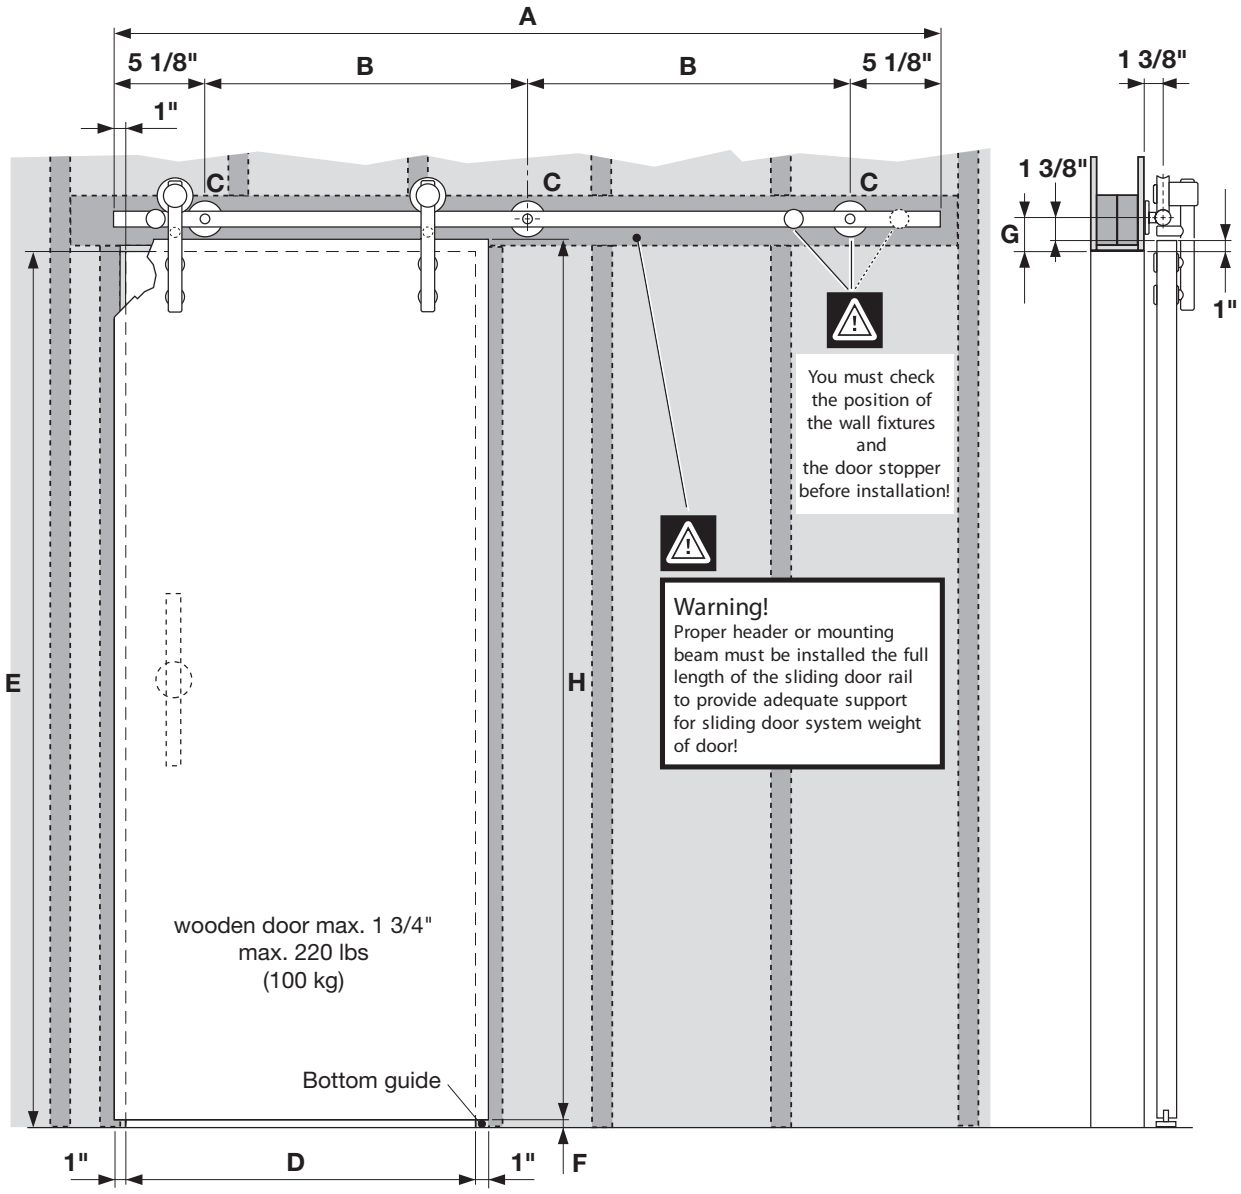

Complete-sets


Set Unotec Home Art. No.	A inch	B inch	C Each	D inch	E max. inch	F inch	G inch	H max. inch (H = E – F + 1")
941.07.025	70 7/8"	30 5/16"	3	29 1/2" - 35 7/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.026	82 11/16"	24 1/8"	4	35 13/16" - 39 3/8"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.027	90 9/16"	26 3/4"	4	39 3/4" - 44 1/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.028	100"	29 15/16"	4	44 1/2" - 49 3/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"

Manufacturing dimensions (special model)												
inches		Each	inches					H	kg	Each		
A	B	C	D	D1	E max. 98 7/16"	F 1/4" - 3/8"	G	max. 99 1/8" (H = E - F + Y)	Load-bearing capacity of the guide rail J	L	M	N
							(2 3/8")			1	2	2

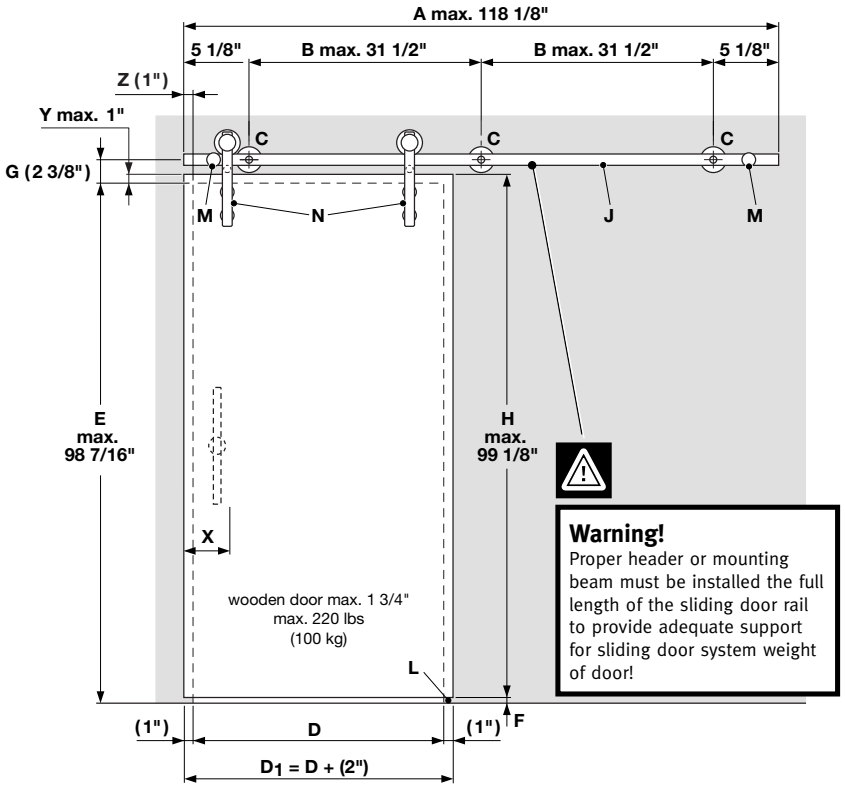

A = Guide-rail length
B = Drill hole clearance
C = Wall fixture
D = Passage width
D1 = Door width
E = Passage height
F = Door – floor clearance
G = Fastening clearance
H = Door height
J = Load-bearing capacity of the guide rail
L = Bottom guide
M = Door stopper
N = Trolley
X = Door knob clearance
Y = Door height overhang
Z = Guide-rail overhang
( ) = **recommended!**

Calculation for guide-rail length A

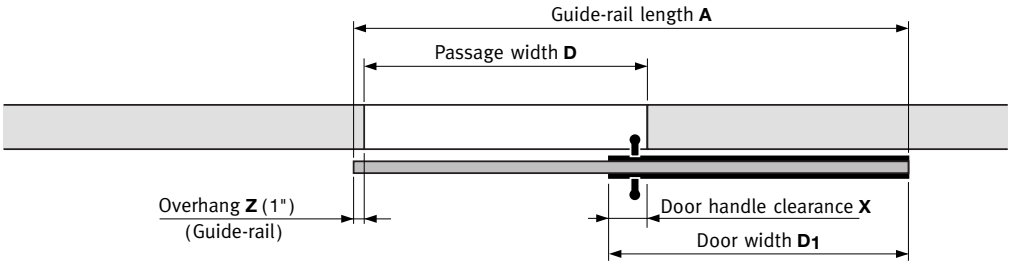


Overhang Z + Passage width D + Door width D1 – Door handle clearance X = Guide-rail length A


Make door handle clearance so that fingers do not get pinched when the door is manipulated! See page 5.

Manufacturing dimensions (special model)

inches			Each	inches							kg	Each			
A	B1	B2	C	D	D1	D2	E max. 98 7/16"	F 1/4" - 3/8"	G	H max. 99 1/8" (H = E – F + Y)	Load-bearing capacity of the guide rail J	K	L	M	N
									(2 3/8")			1	2	4	4

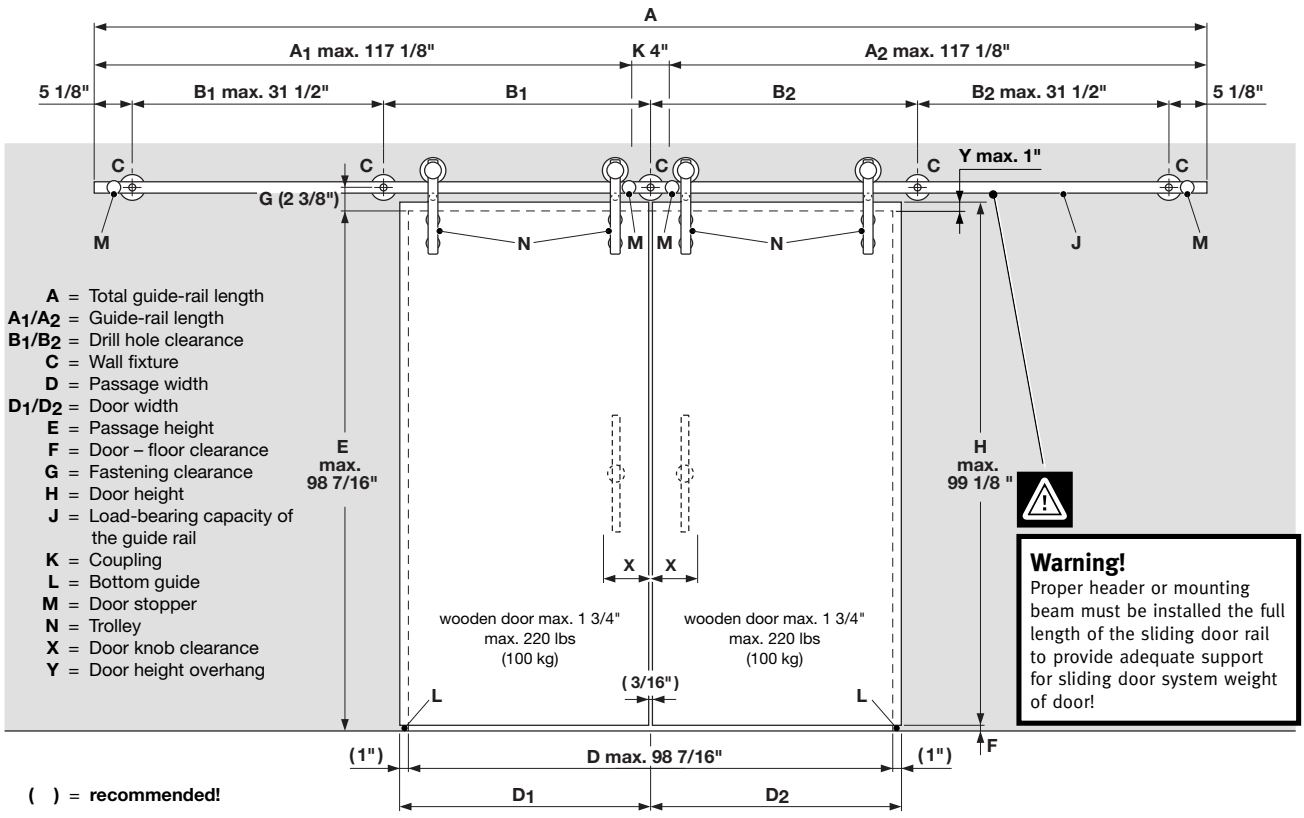


Calculation for total guide-rail length A

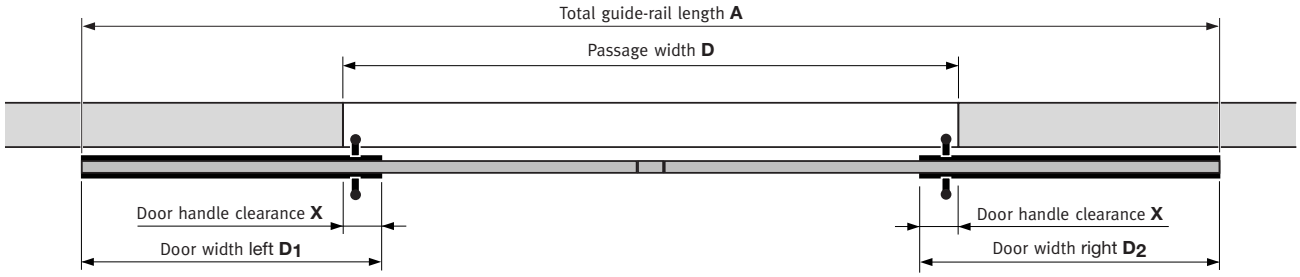


Door width D1 – Door handle clearance X + Passage width D + Door width D2 – Door handle clearance X = Total guide-rail length A

Make door handle clearance so that fingers do not get pinched when the door is manipulated! See page 5.

Standard installation

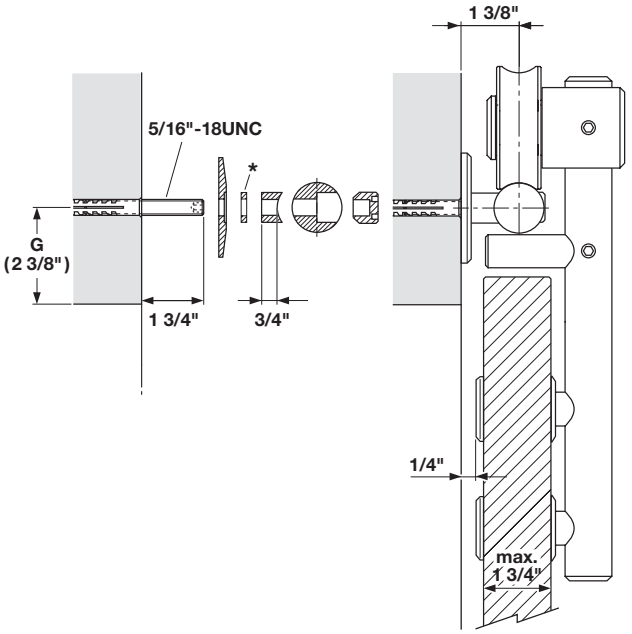

Installation with baseboards and trim

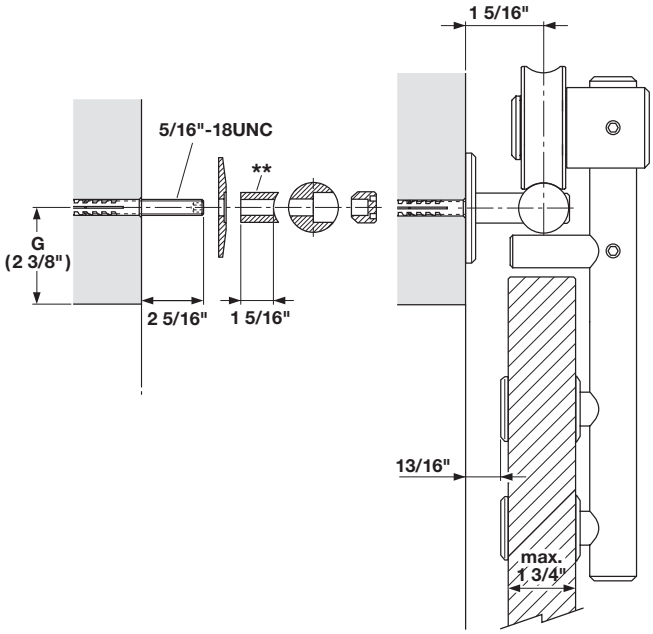


* Compensation disks 1/16", 3/16" and 3/8"
To compensate for wall unevenness, order separately.
(Only 1 piece per wall fixture!)


	Art.-No.	inches
	941.07.105	1/16"
	941.07.106	3/16"
	941.07.107	3/8"

** Spacers order separately.


	Art.-No.
	941.07.104

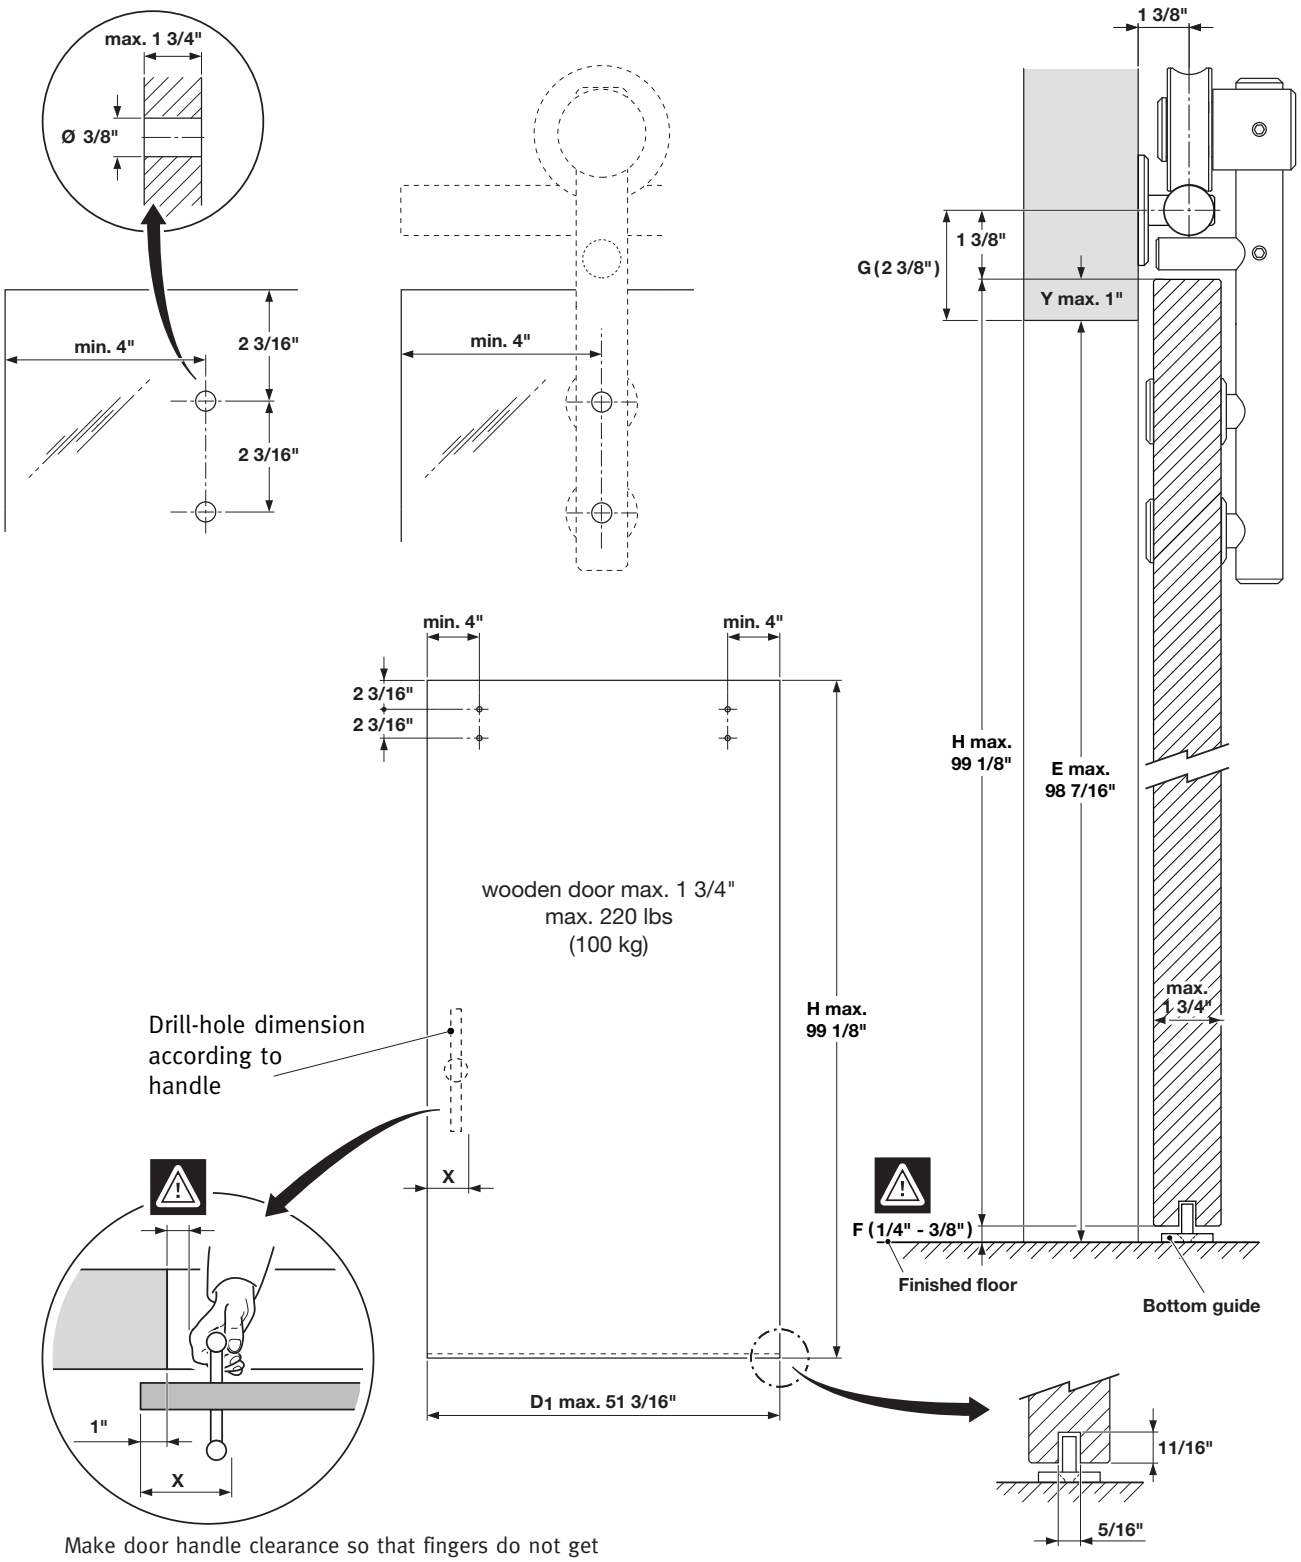


Make door handle clearance so that fingers do not get pinched when the door is manipulated!




Guide rail Ø 1" inch



Guide rail Ø 1" inch
for guide rail couplings

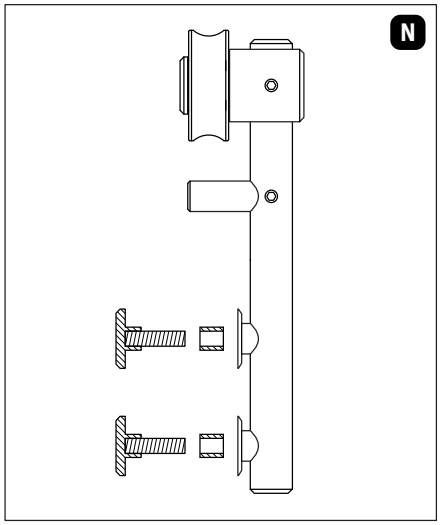


Trolley complete

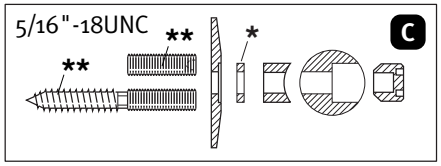


Wall fixtures complete


** Without screws and dowels, at construction site
* Compensation disks * 1/16", 3/16" and 3/8" order separately

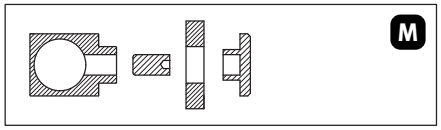


Door stoppers complete, stainless steel

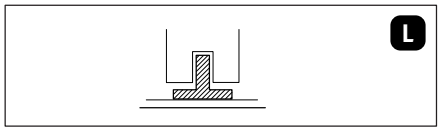

Bottom guide, plastic
(Without screws and dowels, at construction site)

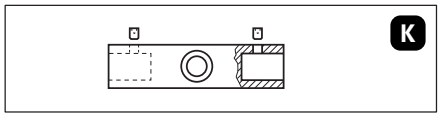

Guide rail coupling Ø 1" inch

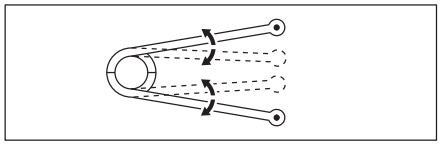

Special tool

HÄFELE

3901 Cheyenne Drive • P.O. Box 4000 • Archdale, NC 27263
1-800-423-3531 • www.hafele.com