

3832DO


- Hold-out in open position
- Load rating up to 45kg
- 100% extension
- 12.7mm slide thickness
  (14mm with mounting bracket)
- Optional clip-on bracket for
  bottom and platform mounting
- Front disconnect
- Hold-in
- Cam drawer adjust (3.1mm)



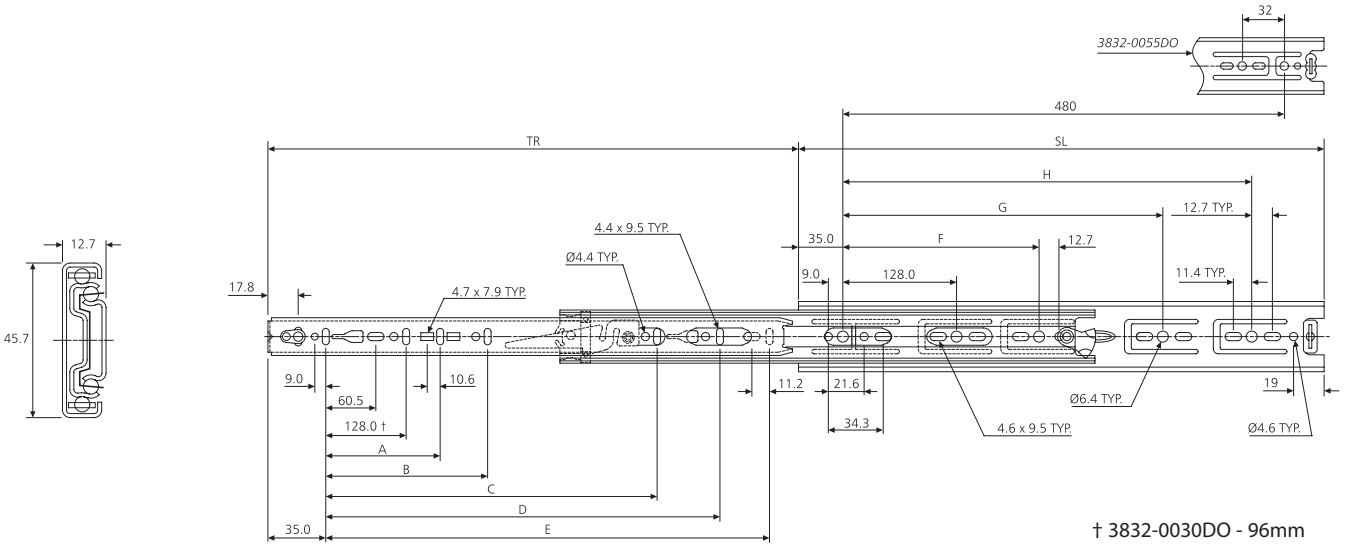

† 3832-0030DO - 96mm









Accuride reserve the right to alter specifications without notice

3832DO

3832DO	mm									
	SL	TR	A	B	C	D	E	F	G	H
DZ3832-0030DO	300	305	-	-	-	-	242	224	-	-
DZ3832-0035DO	350	356	-	-	-	-	292	224	-	-
DZ3832-0040DO	400	406	-	-	-	-	342	224	320	-
DZ3832-0045DO	450	457	-	-	320	-	392	224	352	-
DZ3832-0050DO	500	508	-	-	320	-	442	224	416	-
DZ3832-0055DO	550	559	-	-	320	416	492	224	352	448
DZ3832-0060DO	600	610	224	-	416	-	542	224	352	480
DZ3832-0065DO	650	660	224	-	416	554	592	224	352	554
DZ3832-0070DO	700	711	224	288	416	554	642	224	352	554

Notes:
- *Fixing recommendation: 4mm wood screw/ 6mm Euro screw*
- *For brackets refer to page 29*
- *Horizontal mounting not recommended*

Notas:
- *Recomendaciones de montaje: tornillo de madera de 4mm/tornillo euro de 6mm*
- *Para escuadras, consúltese la página 29*
- *Montaje horizontal no recomendado*

Note:
- *Consigli per il fissaggio: vite per legno da 4mm/ vite Euro da 6mm*
- *Per le staffe fare riferimento alla pagina 29*
- *Non si consiglia il montaggio orizzontale*

Accuride reserve the right to alter specifications without notice / Accuride se reserva el derecho de alterar las especificaciones sin aviso previo / Accuride si riserva il diritto di apportare modifiche senza ulteriore comunicazione