


## PD16W

### UL Listed Power Distribution Module

Altronix PD16W UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into sixteen (16) individually fuse protected outputs.

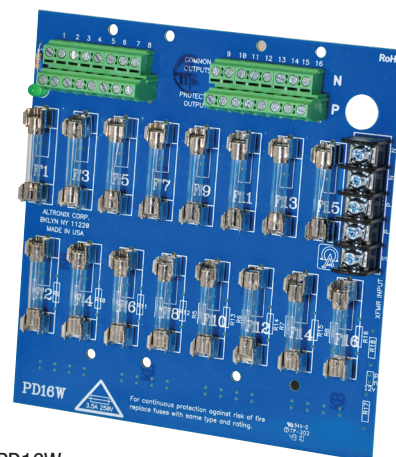

PD16W

### Specifications

#### Input

Voltage Range 12VDC or 24VDC, up to 10A or  
24VAC or 28VAC, up to 12A

#### Outputs

Sixteen (16) fuse protected outputs  
2.5A per output max.  
Total output current should not exceed max current rating of  
power supply employed  
Fuses are rated @ 3.5A/250V

#### Indicators (LED)

DC Output Power LED

### Agency Listings

#### UL:

UL294 Access Control  
UL603 Burglar Alarm  
UL1481 Fire Alarm

#### cUL:

General Signaling Equipment Evaluated to  
CSA Standard C22.2 No.205-M1983  
Power Supplies for Burglar Alarm Systems ULC-5318-96

### Physical and Environmental

#### Dimensions (L x W x H)

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

Product Weight 0.4 lb. (0.18 kg)

Shipping Weight 0.5 lb. (0.23 kg)

#### Temperature

Operating 0°C to 49°C (32°F to 120°F)

Storage -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/-5%

Mounting hardware included


### Lifetime Warranty

# PD16W

UL Listed Power Distribution Module

## Board Dimensions (L x W x H) and Drawing

6" x 5.875" x 0.95" (152.4mm x 149.2mm x 24.1mm)

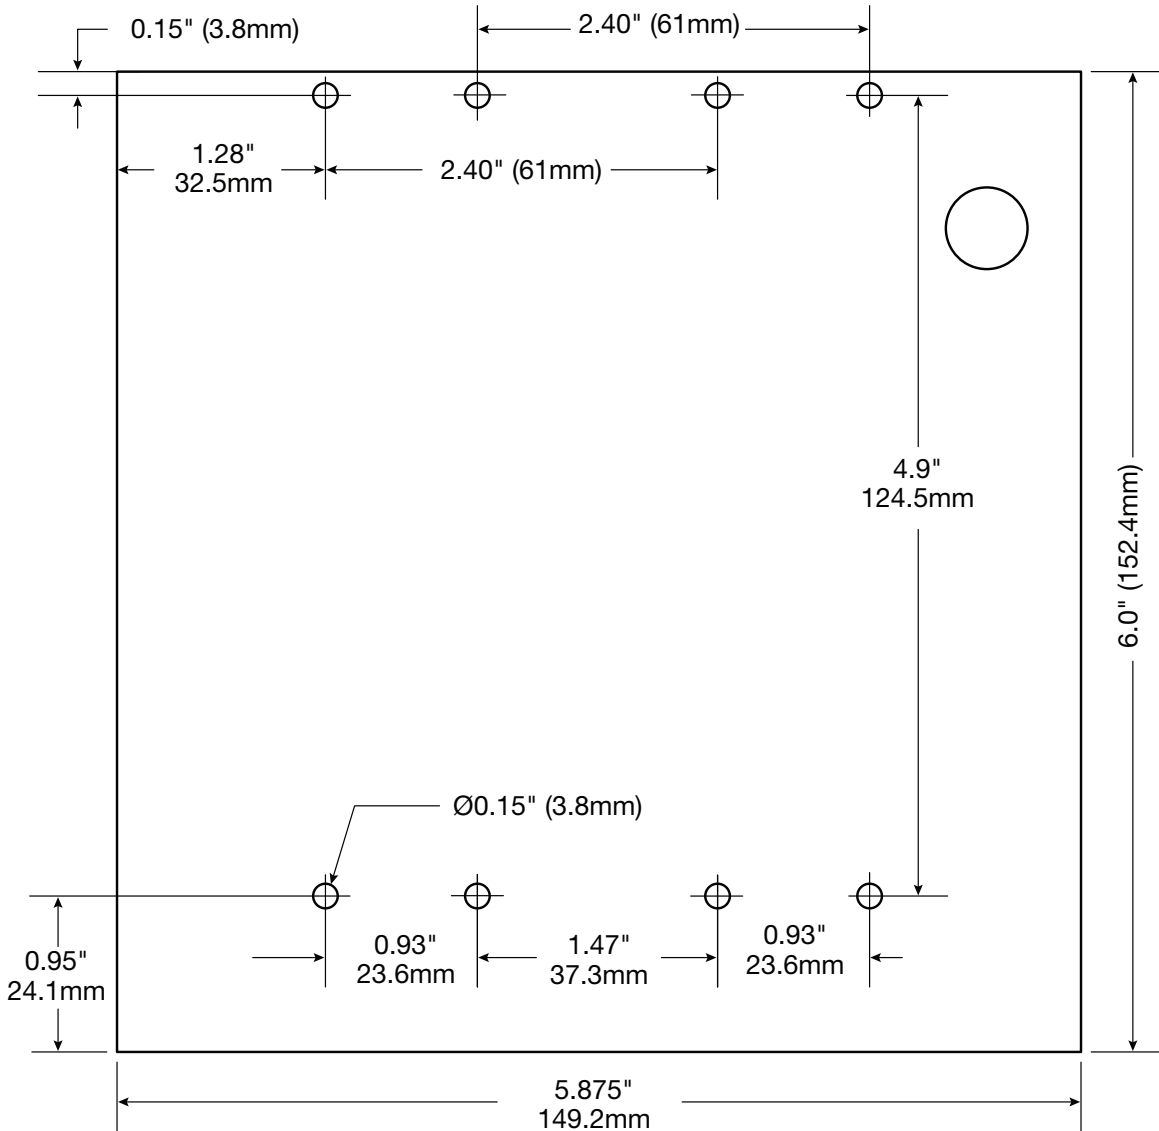

### Lifetime Warranty