Altronix®

IML SECURITY SUPPLY

Rev. 01052021

PD8UL

UL Listed Power Distribution Module

Altronix PD8UL UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into eight (8) individually fuse protected outputs.

PD8UL

Specifications

Input

Voltage Range	12VDC or 24VDC, up to 10A or 24VAC or 28VAC, up to 12A

Outputs

Eight (8) fuse protected outputs

2.5A per output max

Total output current should not exceed max current rating of power supply employed

Fuses are rated @ 3.5A/250V

Indicators (LED)

DC Output	Power LED

Agency Listings

UL:

UL294	Access Control
UL603	Burglar Alarm
UL1481	Fire Alarm

cUL:

General Signaling Equipment Evaluated to CSA Standard C22.2 No.205-M1983

Power Supplies for Burglar Alarm Systems ULC-5318-96

Physical and Environmental

Dimensions (L x W x H)

5.25” x 3.25” x 1” (133.4mm x 82.6mm x 25.4mm).

Product Weight	0.25 lb. (0.11 kg)
Shipping Weight	0.3 lb. (0.14 kg)

Temperature

Operating	0ºC to 49ºC (32ºF to 120ºF)
Storage	-20ºC to 70ºC (-4ºF to 158ºF)
Relative Humidity	85% +/-5%

Mounting hardware included

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Altronix®

PD8UL

UL Listed Power Distribution Module

Board Dimensions (L x W x H) and Drawing

5.25” x 3.25” x 1” (133.4mm x 82.6mm x 25.4mm)

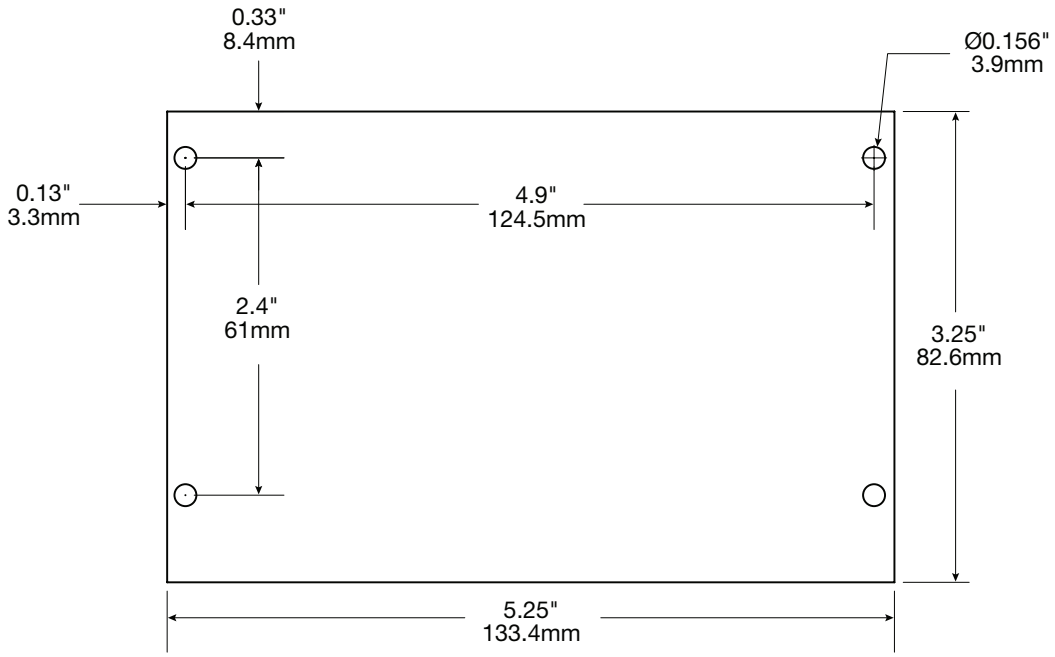

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA
phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com