



# Prox-Linc™ Cards and Tags

## 125 kHz



### Prox-Linc CS

Standard “Clamshell” Style Prox Badge  
Credit Card Sized with Beveled Edges  
Pre-Punched in Portrait Orientation  
Accepts “Photo-Flap” and Self-Adhesive  
Badge Overlays.



### Prox-Linc GR

Graphics Quality Prox Card  
ISO Compliant Thickness for Badging  
Graphics Quality, Both Sides, Standard!  
Portrait or Landscape Punch Capability  
No Diminished Read Range  
Available with magnetic stripe (GRMAG)



### Prox-Linc KT

KeyTag Designed to Fit on Keyring/chain  
Stylish, Tear Drop Design  
Achieves 75% Read Range of Cards  
ABS Construction for High-Endurance

- **Technology:** Passive proximity @ 125 kHz.
- **Security:** The Prox-Linc cards/tags can be programmed with up to 72,058 trillion unique codes.
- **Long Life:** No direct contact, no battery, capable of an infinite number of reads to assure years of maintenance-free operation.
- **Custom Formats:** Field programmable Wiegand format up to 56 user definable bits insures security, compatibility and minimal lead times.
- **Warranty:** Prox-Linc cards and tags are warranted for life against defects in material and workmanship. (See detailed warranty policy)

**Your source for a full spectrum of readers and tags for the access control industry**

# Specifications

# Prox-Linc™ CS - GR - KT

## Read Ranges:

**SR-2400** CS = 4 - 5.5" (10.2 - 14.0 cm)  
GR = 4 - 5.5"  
KT = 3 - 4" (7.6 - 10.2 cm)

**SP-6820** CS = 6 - 8" (15.2 - 20.3 cm)  
GR = 6 - 8"  
KT = 5 - 6" (10.2 - 15.2 cm)

**MM-6800** CS = 6 - 8" (15.2 - 20.3 cm)  
GR = 6 - 8"  
KT = 5 - 6" (12.7 - 15.2 cm)

**MR-1824** CS = 18- 24" (45.7 - 60.9 cm)  
GR = 18- 24"  
KT = 14- 19" (35.6 - 48.3 cm)


**Frequency:** 125 kHz - Passive

**Operating Temperatures:**  
-31° to 150° F (-35° to 65° C)


**Operating Humidity:**  
0-95% non-condensing

**Weight:** CS = .30 oz (8.5g)  
GR = .23 oz (6.5g)  
KT = .25 oz (7.0g)



**Color:** CS = Off White  
GR = White, Fine Matte Finish  
KT = Dark Gray

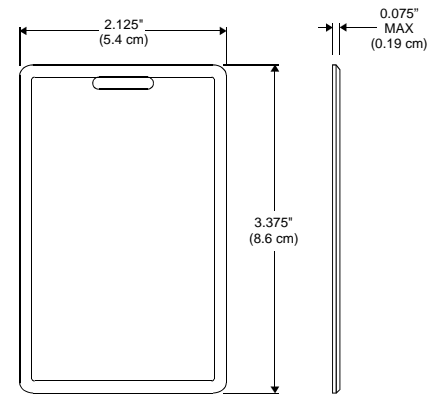

Prox-Linc CS Dimensions  
3.375 × 2.125 × .075 inches (8.57 × 5.4 × .19 cm)

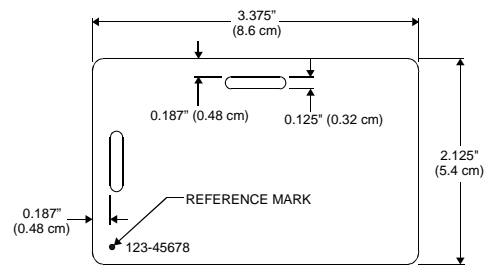

Prox-Linc GR Dimensions  
3.375 × 2.125 × .033 inches (8.57 × 5.4 × .08 cm)

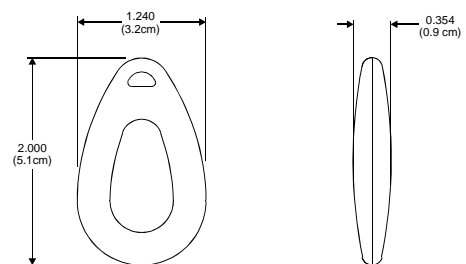

Prox-Linc KT Dimensions  
2.0 × 1.24 × .35 inches (5.08 × 3.15 × .89 cm)

**Warranty:**  
Lifetime warranty against defects in material and workmanship when installed according to AWID's installation instructions. See complete warranty statement for further details.

**Disclaimer:**  
Specifications subject to change without notice. AWID reserves the right to make changes to improve performance without impacting form, fit or function.



This product is protected by U.S. patent No. 5594 384.

January 28, 2002

Applied Wireless ID  
382 Route 59, Section 292  
Monsey, NY 10952

Tel: (845) 369-8800  
Fax: (845) 369-1195  
Internet Address: <http://www.awid.com>