


CL190-HD Series

- **HEAVY DUTY GRADE 1 CYLINDRICAL LOCK**
- **FIELD SELECTABLE FAIL SAFE (EL) <-> FAIL SECURE (EU)**
- **AUTO-VOLTAGE DETECTION ACCEPTS 11-30V**
- **MADE IN THE USA**
- **UL LISTED**
- **5 -YEAR NO HASSLE WARRANTY**

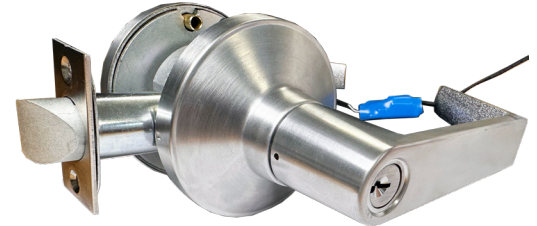

The Command Access CL190-HD series is a low-energy motorized lever control cylindrical lock ideal for any continuous duty application or condition requiring low surge and hold current. It is built on a heavy-duty cylindrical lock chassis and is made for high-use environments. The whole assembly is produced right here in the US. Our motor module auto-detects anything from 11-30VDC & includes a dip switch to change from Fail Safe (EL) to Fail Secure (EU). Allowing inventory flexibility eliminates the need to inventory 12 or 24V & EU or EL models. Optional additions: built-in request to exit (REX) switch & Molex connectors for plug & play installations.

SPECIFICATIONS

Voltage:

- Voltage range – 11 to 30 VDC
- Standard - Average Current Peak: 300mA, Average Current Hold: 100mA

Product Details:

- Complete Lock Box: 8.5"W x 10.5"L: x 4.75"H
- Weight: 6 Lbs
- Master Pack Qty: 6 ea.

Accessories

- Request-to-Exit - Built-in Request to Exit switch
- Door Position Switch - see IDPS series
- QC/CON/BC - Quick Connects

FEATURES

- Low maximum current draw 300 mA: use more locks on a single power supply. Additional savings for the owner.
- Low holding current 100 mA : reliable operation and meets sustainable consideration.
- Fail Safe(EL) & Fail Secure(EU) field selectable with flip of a switch.
- Multiple lever styles & finishes available.
- Available SFIC or LFIC (Schlage): Cylinder not included.
- Available with Schlage C type keyway standard
- Request-to-exit built-in.
- 5-year "No Hassle" warranty.

MODELS AVAILABLE:

CL 190HD-EU	Outside lever unlocked (EU) electronically. Latchbolt retracted by key out-side or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress
CL 190HD-EL	Outside lever locked (EL) electronically. Latchbolt retracted by key outside or lever inside. Switched power allows outside lever to retract latchbolt. Inside lever is always free for immediate egress.

HOW TO ORDER

CATEGORY	SERIES	FUNCTION	LEVER	VOLTAGE	FINISH	BACKSET	STRIKE	CYLINDER	KEYING	OPTIONS
CL	190-HD	EU/EL	L6	12-30VDC	612*	2-3/4" <small>STANDARD</small>	ASA- <small>STANDARD</small>	P	SCC	REX- <small>REQUEST TO EXIT SWITCH</small>
			L17		613	2-3/8"	FL - <small>FULL LIP</small>	LC		QC/CON/BC - <small>MOLEX CONNECTORS - SPECIFY BRAND</small>
					622	5"*	T- <small>"T" STRIKE</small>	SFIC		SF - <small>SPLIT FINISH *</small>
					625*			LFIC ¹		AM - <small>ANTIMICROBIAL COATING *</small>
					626					

* Special order - Lead time may be extended
 1. Available in L6 lever only

NEED A LOCKING HARDWARE POWER SUPPLY?

RECOMMENDED LOCKING HARDWARE POWER SUPPLIES:

- PS204/PS204B
- PS220/220B
- PS480B
- PS210
- PS440B

