



SWITCH LOCKS

SINGLE POLE, SINGLE THROW

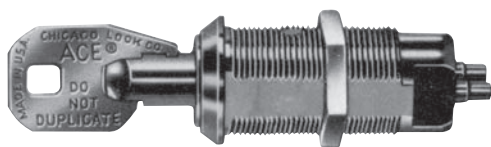

C4073 SERIES

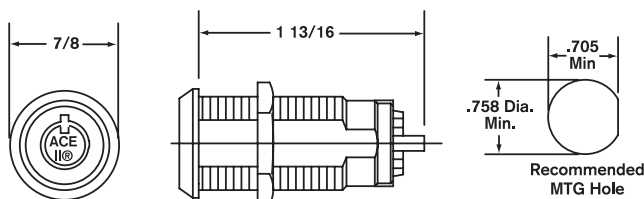

Ace II® Lock Assembly.

- Maintaining contact switch operated by manually rotating inserted key 90° clockwise from open to closed position.
- Momentary contact switch locks feature spring return from closed to open position after 90° clockwise key rotation to closed position.
- Contact configuration: SPST
- 7 amps @ 28 VAC/VDC
- Electrical Life: 6,000 cycles @ Max. Load.
- Contact Resistance: 50 milli ohms initial maximum.
- Bright Chrome finish.
- Two keys per lock.
- Master - Keying not available.
- D137-CLC key blank.


Lock No.	Keypull	Contact	KA Codes	KD Changes
C4073-1DC	OFF Only	Maintaining	PL927	200
C4073-2DC	OFF & ON	Maintaining	PL910	200
C4073-70DC	OFF Only	Momentary	PL927	200

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.

SINGLE POLE, SINGLE THROW



C2174 SERIES

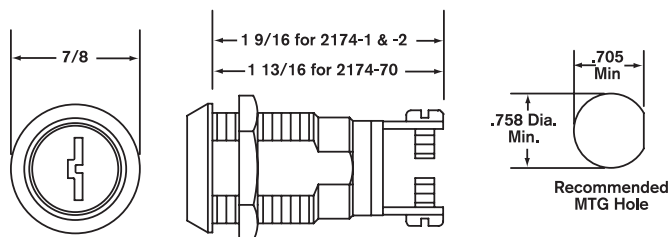

Double Bitted Assembly With Eleven Criss-Cross Blade Tumblers.

- Lock operation same as 4073 Series.
- Contact configuration: SPST
- 7 amps @ 28 VAC/VDC
- Electrical Life: 6,000 cycles @ Max. Load.
- Contact Resistance: 50 milli ohms initial maximum.
- Bright Chrome Finish.
- Two keys per lock.
- Master - Keying not available.
- DK-4 key blank.

Lock No.	Keypull	Contact	KA Codes	KD Changes
C2174-1DC	OFF Only	Maintaining	2001 2007	200
C2174-2DC	OFF & ON	Maintaining	2001 2007 2387	200
C2174-70DC	OFF Only	Momentary	2001 2007 2126	200

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.