

SWITCH LOCKS

SINGLE POLE, DOUBLE THROW


4235 Series:
Ace II® Lock Assembly.

3535 Series:
Double Bitted Assembly With Eleven
Criss-Cross Blade Tumblers.

These features apply to both switch locks:

- 7 amps resistive/4 amps inductive @ 115 VAC or 28 VDC.
- Reliable snap action switch provides many thousands of electrical contacts without failure.
- Terminals designed to accept "AMP" .058 pin receptacles.
- Bright Chrome finish.
- Furnished with 10 inch, 20 gage stranded wire.
- Two keys per lock.
- Master - Keying not available.
- Maintaining only.
- Switches are U.L. recognized & CSA listed.
- D137-CLC key blank for tubular.
- DK-4 key blank for double bit lock.


Contact factory for additional specifications.

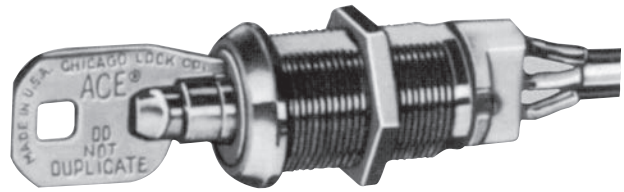

C4235 SERIES




C3535 SERIES

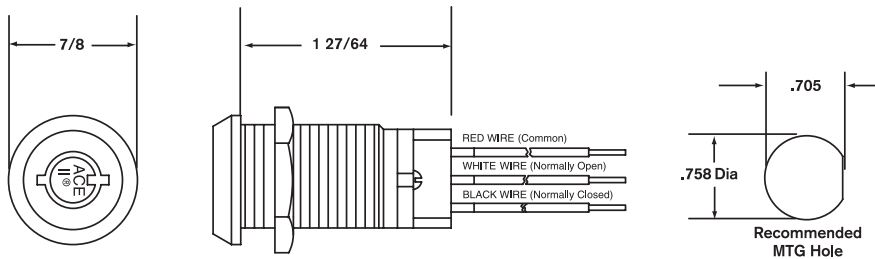

Ace II® Switch Locks — SPDT

Lock No.	Keypull	Rotation	KA Codes	KD Changes
C4235-DC	2 positions	180° CW	CLC705	200
4235BDC	1 position	165° CW	CLC706	200

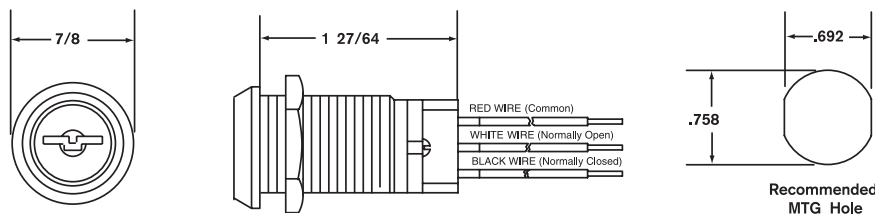

Double Bitted Switch Locks — SPDT

Lock No.	Keypull	Rotation	KA Codes	KD Changes
3535DDC	2 positions	180° CW	2387	200
C3535-BDC	1 position	165° CW	2382	200

Warning: Improper connection to circuitry may result in shock. Since CompX Chicago does not control the use of its products, external wiring, switch lock selection, and/or use is not the responsibility of CompX Security Products.