

disc tumbler furniture locks

REMOVACORE™

Now an entire furniture locking system can be changed in a matter of minutes, not days, through flexible key control.



**IT'S
EASY!**




D8779
Control Key

The D8779 control key allows the user to remove and install replacement lock cores (C8850) easily. For a complete list of replacement cores, see bottom of page.

SMALL DIAMETER FURNITURE LOCKS

LOCK CORE...

**ONE PLUG
FITS ALL!**

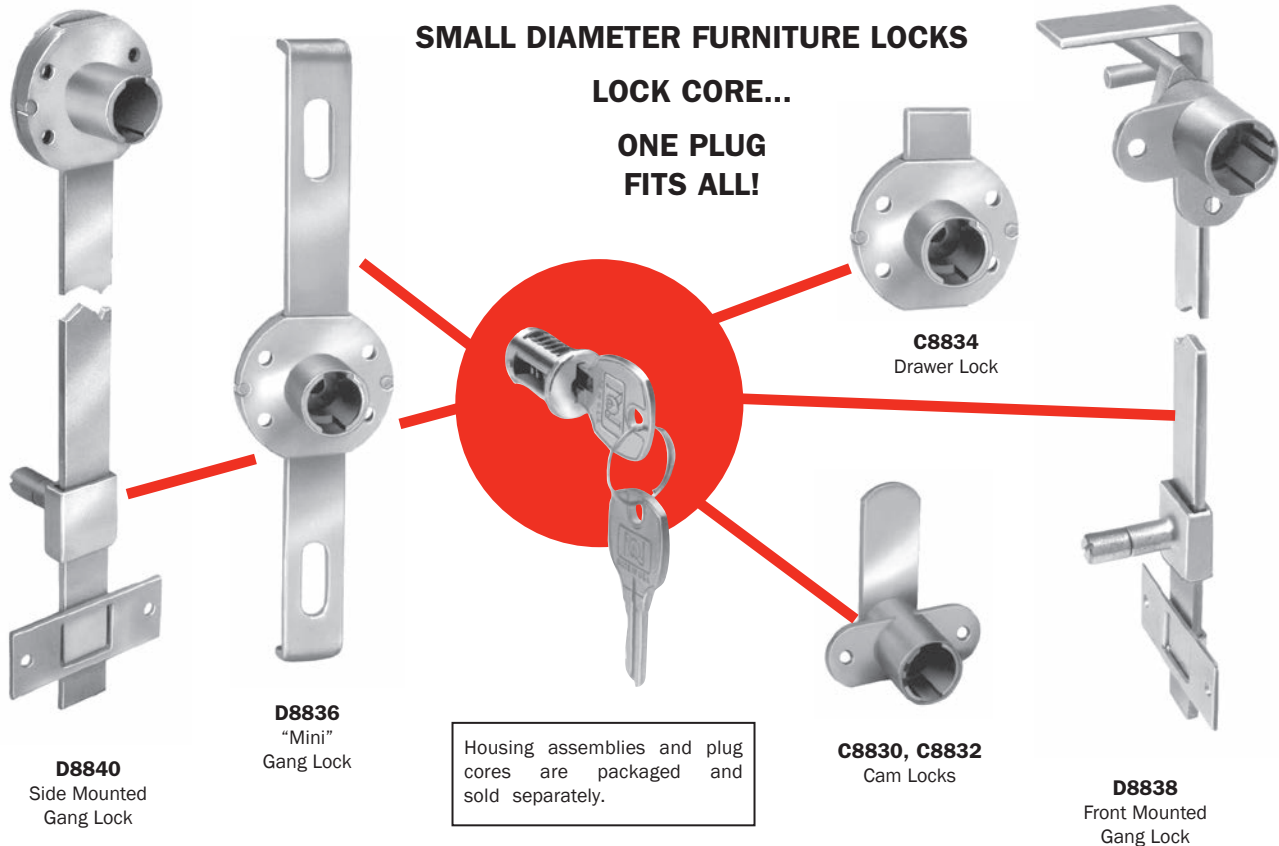

D8840
Side Mounted
Gang Lock

D8836
"Mini"
Gang Lock

C8834
Drawer Lock

C8830, C8832
Cam Locks

D8838
Front Mounted
Gang Lock

Housing assemblies and plug cores are packaged and sold separately.

plug core for furniture locks



C8850

Part No.	KA* Codes	KD Codes		Key Blank
C8850-14A	20	200		D8783
C8850-3	20	200		D8783
C8850-19	20	200		D8783

*Key Codes used: D003A, D054A, D071A, D084A, D091A, D177A, D233A, D256A, D284A, D313A, D346A, D362A, D390A, D413A, D415A, D420A, D435A, D512A, D554A and D642A.

APPLICATION – One Plug Fits All for RemovaCore locks on furniture applications.

OPERATION – In all RemovaCore applications, key is removable in both locked and unlocked positions. D8779 control key is needed to remove and install lock cores (sold separately).

KEYING – All Cores are Master keyed to E13A. Will key together with all other disc tumbler locks using D8783 key blank, except C8051 and C8052. See table for available keying. KA to 20 changes, including all six standard disc tumbler codes.



PACKAGING – Supplied with two keys.

disc tumbler furniture locks

THESE LOCKS ALL FEATURE

REMOVALCORE™

CAM LOCKS

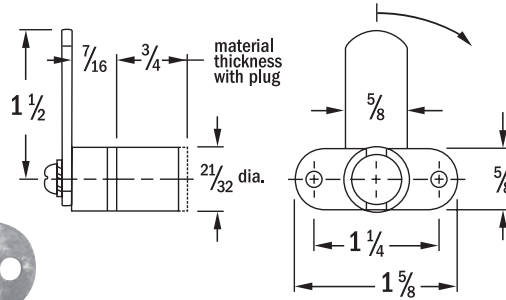


APPLICATION - For wood pedestals, door or drawer, R.H. or L.H. Surface Mounted. For flipper door use C7015 offset cam and C2003 strike.

OPERATION - Choice of 90° or 180° cam rotation, CCW to lock.

KEYING* - Order core plug separately, C8850

PACKAGING - Housing assembly supplied with two mounting screws and straight cam. Housings are unplated.



C8830 (90°) Cam Lock
C8832 (180°) Cam Lock (shown)


Can also be used with pin cams.

Use
C8850*
Core




Part No.	Description	Type of Installation	Cam Rotation	Lock Cylinder Length	Maximum Material Thickness	
C8830	Housing Assembly	Pedestal	90°	3/4"	3/4"	
C8832	Housing Assembly	Pedestal	180°	3/4"	3/4"	

SIDE MOUNTED TWO DRAWER "MINI" GANG LOCK




D8836 "Mini"
Gang Lock

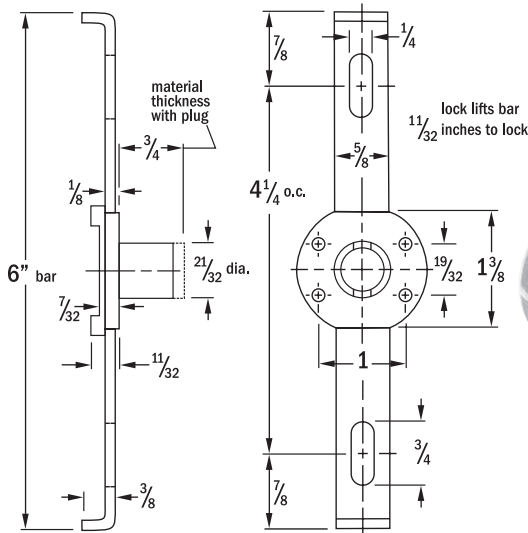

Use
C8850*
Core




DRAWER LOCK



C8834
Drawer Lock



Use
C8850
Core

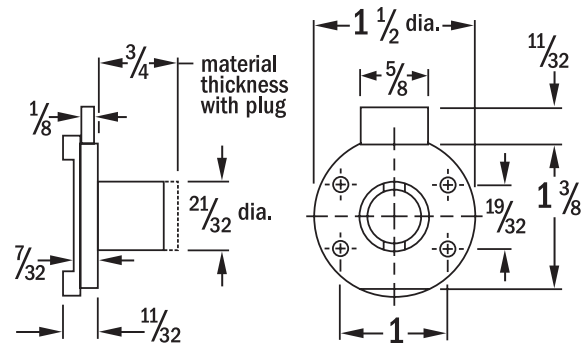

APPLICATION - Two drawer "Mini Gang" lock for desk or pedestals, and single locking drawer for desk or pedestals. Surface Mounted.

OPERATION - Key turn on the D8836 moves the 6" bar from above or below the plastic stops, which are mounted on drawer sides, thus preventing drawer movement. C8834 has a 11/32" bolt throw.

KEYING* - Order core plug separately, C8850

PACKAGING - Housing assemblies supplied with four mounting screws and bolt. D8836 comes with two plastic stops and mounting screws. Housings are unplated.

Part No.	Description	Type of Installation	Bar/Bolt Operation	Lock Cylinder Length	Bar/Bolt Travel	
D8834	Housing Assembly	Single Drawer	Dead	3/4"	11/32"	
D8836	Housing Assembly	Desk Pedestals on two drawer applications	Dead Locking	3/4"	11/32"	

**STOCK
LOCKS**