


pin tumbler drawer locks

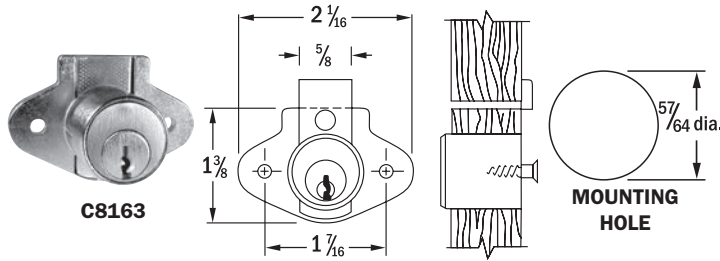

C8163

APPLICATION – For drawers. Surface mounted. Requires 57/64" diameter hole for cylinder.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Will key together with most other pin tumbler locks using D4291 key blank. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys and mounting screws. If trim ring is required, order C2017 separately.

"THE ADVANTAGE PLUS"



C8163 locks feature easy removal of cylinder from lock housing while lock remains in place. Bolt has access hole for cylinder retention screw at back of lock. U.S. Patent No. 4.899.563.



C7163-2C

Extended bolt for C8163 drawer lock provides 3" extension, can be cut to required length.

Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Reference Number	Key Blank
						KD	MKKD		
C8163-26D	Drawer	Dead	15/16"	11/32"	4	850	650	M2-3705	D4291
C8163-4	Drawer	Dead	15/16"	11/32"	4	850	650	M2-3705	D4291

pin tumbler door & drawer locks

"THE ADVANTAGE PLUS" CAM LOCKS

The locks are fastened in place with two screws for easy installation. Re-keying or servicing is accomplished by removing the cam retaining screw and cam. Use a 5/64" allen wrench to remove the plug cylinder assembly. The mounting plate remains installed on the cabinet. Re-key as required and reinstall cylinder plug assembly on mounting plate.

U.S. PATENT NO. 5.678.438

APPLICATION – For drawer, R.H. or L.H. doors. C8183 assembled for door function. C8188 assembled for drawer function.

OPERATION – 90° cam turn, key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1.

ONE LOCK, TWO FUNCTIONS
DOOR OR DRAWER




C8183

Assembled as a Door Lock




C8188

Assembled as a Drawer Lock

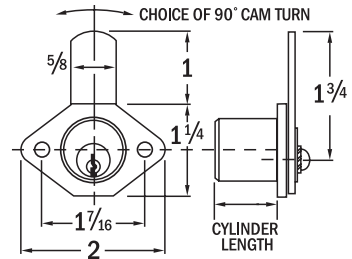

PACKAGING – Supplied with two keys, extra backplate, two cams and two mounting screws. If trim ring is required, order C2017 separately.

Note: If formed cam is required, order C7113 or C7116.




MOUNTING HOLE

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes		Reference Number	Key Blank
					KD	MKKD		
C8183-26D	Flush	7/8"	7/8"	4	850	650	M2-8183	D4291
C8188-26D		1-3/8"	1-3/8"	4	850	650	M2-8188	D4291

*Key Codes used: 4 Codes – 101, 103, 107 and 915.

pin tumbler drawer lock



C8161


C8160

APPLICATION – Replacement lock housing and cylinder for drawers with 7/8" thick fronts. Half mortise design.

OPERATION – Key removable in both locked and unlocked positions. Interchangeable cylinders are attached or removed through the use of a special key at back of lock.

KEYING – Keyed differently (100 changes).

PACKAGING – C8160 cylinder supplied with two keys. C8161 lock housing supplied with cylinder removal key and mounting screws.

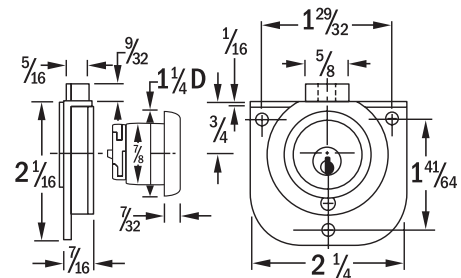

Part No.	Type of Mounting or Installation	Bolt Type	Minimum Material Thickness	Bolt Travel	Key Changes KD	Reference Number	Key Blank
C8160-26D	In Housing	–	–	–	100	M2-3720-025	D4292
C8161-26	Drawer	Dead	7/8"	9/32"	–	M3-3720-011	–

Part No.: **M337201341W010J** for replacement cylinder removal keys.