


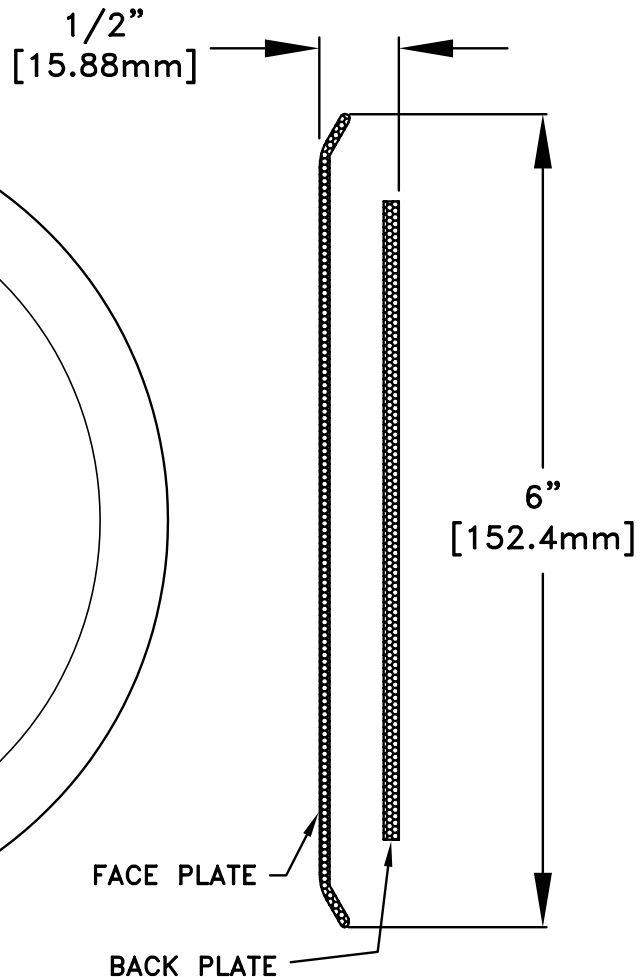

CONFIGURATIONS:	LOW VOLTAGE (STD) OR RADIO CONTROLLED (SUFFIX -RC)
MATERIALS/FINISHES:	STAINLESS STEEL: SATIN (STANDARD) OR MIRROR POLISHED BRASS: MIRROR POLISHED, OIL RUBBED OR SATIN ALUMINUM: BLUE ANODIZED
CONSTRUCTION:	BACK PLATE MOUNTS TO 4" SQUARE BOX - (4S) STAINLESS STEEL STUDS FURNISHED STANDARD NOISE DAMPENING RUBBER CUSHIONING WASHERS SUITABLE FOR OUTDOOR APPLICATIONS
COLOR OF LOGO/LETTERS:	BLUE, OTHER COLORS AVAILABLE
SWITCH:	UL/CSA LISTED SPDT (DPDT AVAILABLE)

MATERIAL: VARIOUS			FINISH: #4 SATIN			SIZE: 16 GA (0.060)		
DIMENSIONAL TOLERANCES UNLESS NOTED OTHERWISE			TITLE PUSH PLATE 6" ROUND – P.T.O. & LOGO			CURRAN ENGINEERING COMPANY, INC. 28727 INDUSTRY DRIVE VALENCIA, CA 91355 TELEPHONE (800) 643-6353 FACSIMILE (877) 782-5979		
FRAC.	DEC.	ANG.						
±1/32"	±0.031"	± 1 °						
SCALE 3/4		NO. REQ. A/R	DRAWN: PSC			DATE	02/05/97	
NEXT ASSY. 605-BOM			CHECKED: RDC			DATE	02/07/97	
			APPROVED: RDC			DATE	02/10/97	
			A			CE-605		1