

5300 Series Electric Strike



Experience a safer
and more open world

The compact, high performance electric strike designed for fire-rated openings with cylindrical locksets where there is limited space behind the jamb.

Low Profile


- Compact, high-performance design
- Ideal for applications where there is limited space behind the jamb
- Strike body depth 1-1/16"

Versatile Design

- Dual voltage 12/24 VDC/VAC
- Field selectable fail safe/ fail secure
- Unique keeper pin locking design
- Plug-in connector and trim enhancer included

Tested for Durability

- ANSI/BHMA A156.31, Grade 1
- Static strength 1,500 lbs, Dynamic strength 70 ft-lbs
- Designed with the strength and durability to meet UL outdoor rating requirements
- UL 10C fire rated, 3-hour single door (fail secure only)

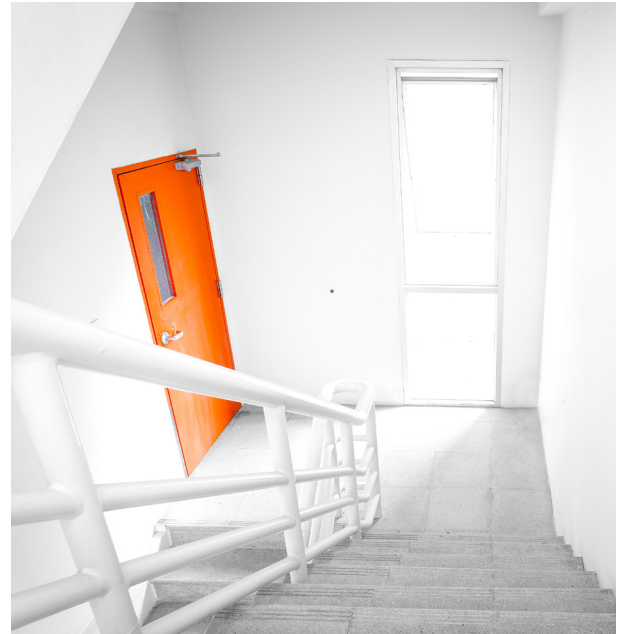

Grade 1



SecuriCare
Warranty



Cylindrical
Locksets



Field Selectable
(Fail secure
/Fail safe)



Dual Voltage
12/24



PoE
Friendly



Outdoor
Rated



Burglary
Rated



Fire Rated

Features

- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft.-lbs.
- Endurance 500,000 cycles
- Field selectable fail secure/ fail safe
- Non-handed
- Internally mounted solenoid
- Accommodates 1/2" - 5/8" latchbolt (5/8" with 1/8" door gap)
- Strike body depth 1-1/16"
- Plug-in connector
- Trim enhancer included
- Dual voltage 12 or 24 VDC/VAC

Certifications

- ANSI/BHMA A156.31, Grade 1
- CAL FIRE, 3776-1654:0502
- NFPA-252 fire door Compliant
- RoHS Compliant
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use
- UL 10C Fire-Rated, 3 Hour Single Door [Fail Secure Only]
- UL 294 Listed
- CAN/ULC-S104 Fire Door Compliant

Specifications

Frame Application

- Metal
- Wood

Electrical

- 240 mA at 12 VDC/VAC
- 120 mA at 24 VDC/VAC
- DC continuous duty/AC intermittent duty only

Options

- LBM - Latchbolt monitor

Accessories

- 150 Strike Latch Guard
- HESCUT-MTK Metal Template Kit
- 2005M3 SMART Pac® III
- 2001M Plug-in Bridge Rectifier
- 2004M ElectroLynx® adapter
- 2006M Plug-in Buzzer
- 5104-1 Stackable Lip Extension
- 5104-1-1/4 Stackable Lip Extension
- 5104-1/2 Stackable Lip Extension

Dimensions

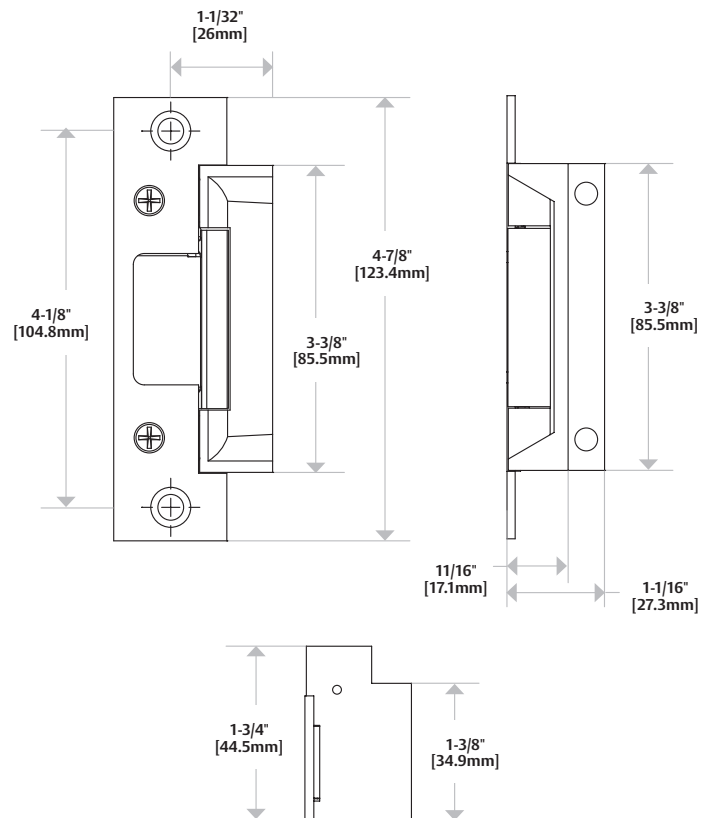


Diagram shown with 501 Option

How to Order

Specify quantity and the following information. Order related products separately

SERIES	MODEL	FINISH	OPTION (S)
5300	—	— 630	— LBM
5300 Universal Electric Strike; Faceplates ordered separately	C* Complete Electric Strike; includes the 501 and 501A faceplates	630 Satin Stainless Steel	LBM Latchbolt Monitor LBSM Latchbolt Strike Monitor

*Complete Pacs are only available in the 630 finish

FACEPLATE OPTIONS	FINISH
502	— 613E
For Cylindrical Locksets (ANSI Metal)	605 Bright Brass
501 Option 4-7/8" x 1-1/4"	606 Satin Brass
For Cylindrical Locksets (Aluminum)	612 Satin Bronze
501A Option 4-7/8" x 1-1/4"	613E Dark Oxidized Satin Brass
502 Option 7-15/16" x 1-7/16"	629 Bright Stainless Steel
503 Option 6-7/8" x 1-1/4"	630 Satin Stainless Steel
For Cylindrical Locksets (Wood)	BSP Black Suede Powder
504 Option 10" x 1-3/8"	