


The concealed 2210 Series, heavy duty, high security track closer features complete concealment with special components to minimize tampering and vandalism. Forged steel, single lever arm and heavy steel mounting plate are designed for correctional, vandal prone, institutional, and other high traffic applications. A choice of finishes and cylinder functions meet correctional and vandal resistant requirements.

<b>Certifications</b>	Grade 1 - ANSI A156.4, UL 10C, ADA, 100 Hour Salt Spray, Meets BAA - Buy American Act	<b>Cover</b>	Metal, standard
<b>Body Construction</b>	<ul style="list-style-type: none"> <li>Cast Iron Body</li> <li>Full Complement Bearing</li> <li>1-1/2" Diameter Piston</li> <li>11/16" Diameter Double Heat Treated Pinion Journal</li> </ul>	<b>Fasteners</b>	TORX machine screw pack
<b>Fluid</b>	All Weather Liquid X Fluid	<b>Mounting</b>	<ul style="list-style-type: none"> <li>Concealed, single acting cylinder in head frame</li> <li>Concealed, arm and track in top rail of door</li> </ul>
<b>Handing</b>	Handed	<b>Arms</b>	Standard security arm and security track
<b>Size</b>	Sized, interior, exterior and vestibule 3-5 (refer to chart)	<b>Finishes/Colors/ Powder Coat</b>	<ul style="list-style-type: none"> <li>Aluminum (689)</li> <li>Statuary Bronze (690)</li> <li>Light Bronze (691)</li> <li>Black (693)</li> <li>Dark Bronze (695)</li> <li>Brass (696)</li> <li>Custom colors optional</li> <li>Optional SRI primer - powder coat only</li> <li>Optional plated finishes</li> </ul>
<b>Warranty</b>	15 years (2210); 2 years (2210DPS)		


**Special Templates**

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.

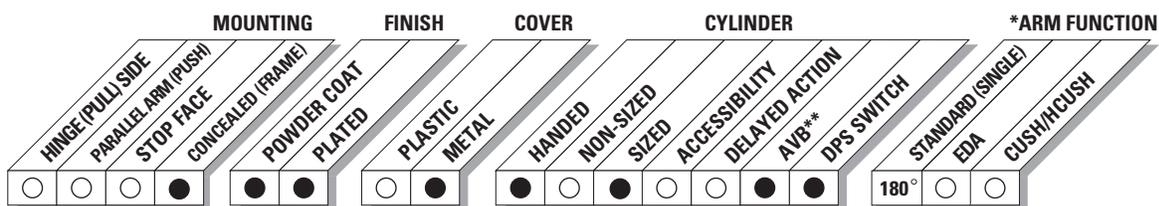

● AVAILABLE  
○ NOT AVAILABLE

\* Maximum opening with standard template.  
\*\* Advanced Variable Backcheck.

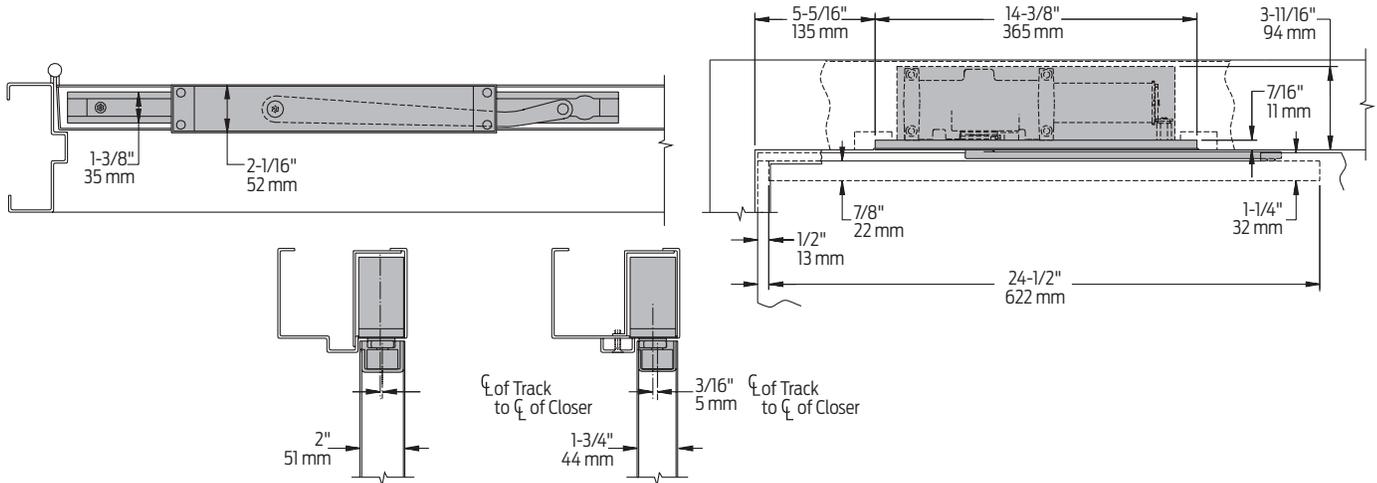

<b>Butt Hinges</b>	Should not exceed 4-1/2" (114 mm) in width
<b>Auxiliary Stop</b>	Recommended where a door cannot swing 180°
<b>Top Rail</b>	1-1/4" (32 mm) mortise required. 3/8" (10 mm) cutout required at top of door, stop face only
<b>Door Thickness</b>	1-3/4" (44 mm) minimum
<b>Door Width</b>	28" (711 mm) minimum
<b>Head Frame</b>	<ul style="list-style-type: none"> <li>5-3/4" (146 mm) wide and 4" (102 mm) high with 2-3/16" (56 mm) rabbet required</li> <li>Consult factory if any dimension is less</li> </ul>
<b>Steel Mounting Plate</b>	Thickness 3/8" (10 mm)
<b>Door Position Switch</b>	<ul style="list-style-type: none"> <li>Optional, newly redesigned, field adjustable switch can interface with security and monitoring systems</li> <li>Add suffix "DPS" to selected cylinder</li> <li>Provides normally open (N.O.) and normally closed (N.C.) circuit</li> <li>A three wire connector harness with 84" (2134 mm), 16 AWG leads is furnished to simplify connection to field wiring</li> <li>Single pole double throw (SPDT) contacts rated at 125/250 VAC at 10.1 amps maximum resistive load are standard</li> </ul>
<b>Advanced Variable Backcheck</b>	<ul style="list-style-type: none"> <li>Cylinder starts backcheck at approximately 45° instead of the normal 75°</li> <li>Add suffix "AVB" to selected cylinder (eg. 2213 DPS AVB)</li> </ul>
<b>Maximum Opening</b>	<ul style="list-style-type: none"> <li>Templating allows 180°</li> <li>Consult factory if door will be held open at 180°</li> <li>Pivot mounting door limits opening to 110° and increases minimum door width to 32" (813 mm). Consult factory</li> <li>Please note that many track style door closers are capable of allowing 180° of door swing</li> </ul> <p><i>Note: Track style closers are at their weakest closing force at 180°. Consult factory for applications where door must swing 180°.</i></p>
<b>Options</b>	<ul style="list-style-type: none"> <li>Advanced Variable Backcheck Cylinder</li> <li>Door Position Switch</li> </ul>

### Cylinder



**2213(4)(5)-3071**  
Cylinder Assembly

- Handed
- Cast iron
- Standard



**2210DPS-3071**  
Cylinder Assembly

- Handed
- Cast iron

### Arms



**2210-3077T**  
**2210DPS-3077T**  
Standard Security Arm

- Handed
- Solid forged steel and large cross section for potentially abusive installations
- Special threaded attachment of track roller for extra security
- Double slab arm/pinion attachment for maximum strength

- Can only be used with high security track roller, 2210-3034 or 2210DPS-3034
- Roller is included with arm when either the 2210-3077T or 2210DPS-3077T are ordered separately

### Tracks



**2210-3038**  
Security Track

- Non-handed
- Hold-open function not available
- Designed to eject foreign objects placed in track during either opening or closing motion
- Requires track roller, 2210-3034



**2210DPS-3038**

### Finish Plates



**2210-11**  
Long Plate

- Heavy gauge metal plate
- Required for complete enclosure
- Six point TORX® mounting screws for extra security
- Closer adjustments not accessible with finish plates installed



**2210-12**  
Short Plate


- Heavy gauge metal plate
- Required for complete enclosure
- Four point TORX® mounting screws for extra security
- Closer adjustments not accessible with finish plates installed

### Installation Accessories



**2210-3034**  
Security Track Roller

- Low friction track roller threads into 2210-3077T arm for extra strength and security
- Can not be removed without disconnecting arm from closer



**2210-493**  
Test Kit

- Battery operated designed to verify switch signal response point
- Can be used directly at door location (used for 2210 DPS only)

### How-to-order 2210 Series closers

#### Select cylinder size

- 2213
- 2213 DPS
- 2214
- 2214 DPS
- 2215
- 2215 DPS

#### Select hand

- RH
- LH

#### Specify finish

- Standard Powder Coat \_\_\_\_\_  
Aluminum, Dark Bronze, Statuary, Light Bronze, Black, Brass

#### Closer will be shipped with:

- Standard cylinder
- Finish plate
- Standard security arm
- Security track roller
- Security track
- TORX machine screw pack, unless options listed below are selected.

### Closer options

#### Cylinder


- Advanced Variable Backcheck (AVB)

#### Finishes

- Custom Powder Coat (RAL) \_\_\_\_\_
- Plated Finish, US \_\_\_\_\_ (cover plate and arm only)
- SRI primer (excludes DPS) (use with powder \_ coat finishes only)

#### Special template

- ST- \_\_\_\_\_

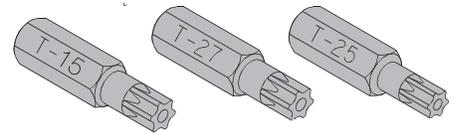

NOTE: Installation of this closer requires T-27, T-25 and T-15 driver bits for TORX machine screws with a security pin. Sold separately.

### Table of sizes

- Select closer based on width of door
- 2210 Series cylinders available in size 3, 4, or 5
- Spring power is set at the factory for size 3, 4, or 5, but is field adjustable (may be increased 50%)

