

CAPXM

Smart Video Intercom - M
Section 28 13 00

DATA SHEET



Key Features

Unit Interface Capabilities
Scheduling Capabilities
Radio Receiver
Wireless Communication

Touchscreen/voice/PIN/card/transmitter/RFID tag
Yes
Included
Yes**

Specifications

Data Connectivity
Voice Communication
Calling Connectivity
Power Supply
Programming (Database Management)
Remote Programming (Database Management)
Realtime Event Monitoring (Email Notifications)
Software
Wiegand Input Data Format
Wiegand Output Data Format
Local User Capacity Per Unit
Local Event History Per Unit
Max Number of Gates/Doors of Control (Each)
Wiegand Input
Relay Output
Mounting Options
Operating Temperature
Display Type
Display Resolution
Integrated Video Camera
Anti-Tamper Alarm
Warranty

Wi-Fi/cellular/wired high-speed internet/DSL
Wi-Fi/cellular/wired high-speed internet/DSL
VoIP (Phone.com)
120VAC to 24VDC transformer (included)
Cloud (myQ® Community)
Yes
Yes
myQ Community
26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare)
26 BIT
50,000
50,000
2
2
4 (2 primary, 2 auxiliary)
Surface/flush/gooseneck
-20°F to 130°F (-29°C to 54°C)
7-inch full color touch screen with Picture-in-Picture
720p high definition
Yes
Yes
2 years

Construction

Enclosure Material
Cast Metal, Power Coated Black


LiftMaster

CAPXM

DATA SHEET

Smart Video Intercom - M
Section 28 13 00

Dimensions

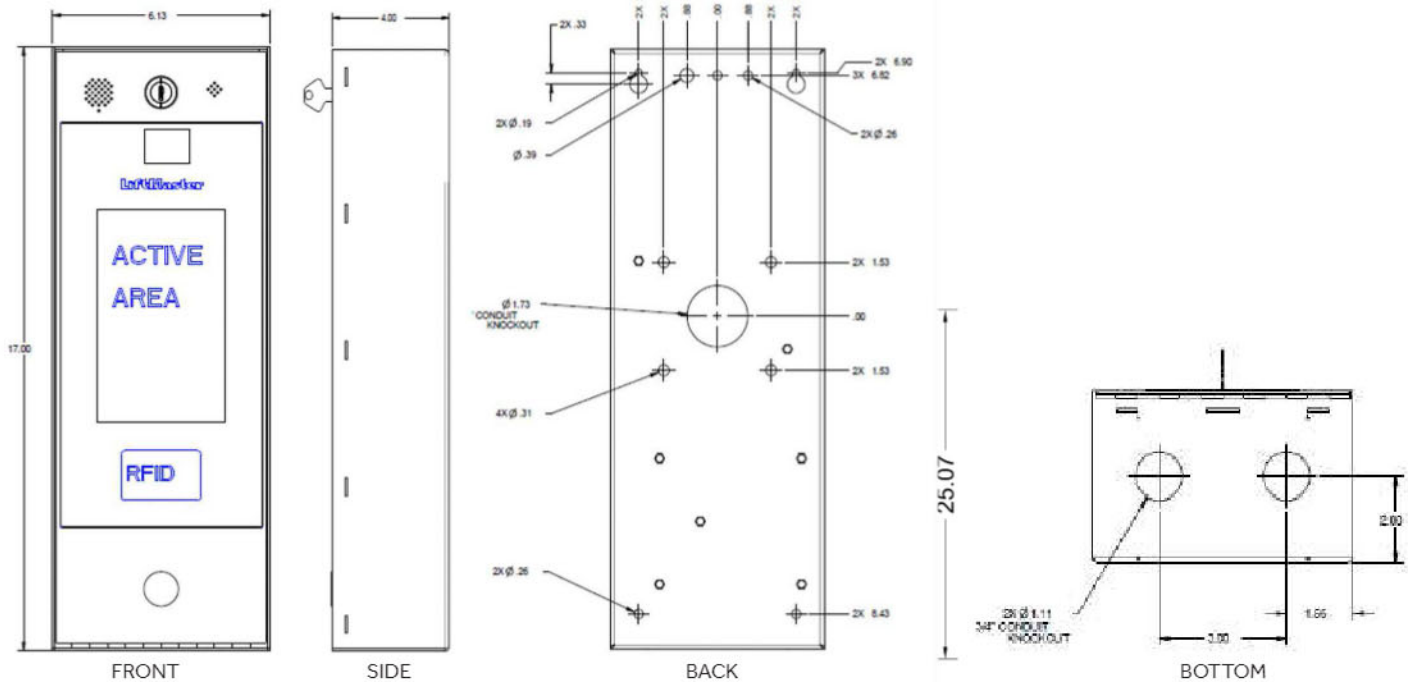

Range

CAPXM Feature	Wired	Wireless	Wire Type	Range
Power 120VAC to 24VDC transformer (from outlet to controller)	x		2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Wiegand accessory wiring	x		7 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x		2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x		2 wire (18-24 AWG)	Up to 500 ft.
Supervised Input	x		2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x		CAT5e or better 8 strand (24 AWG)	Up to 328 ft.
Wireless link to LiftMaster® Operators		x	N/A	Up to 750 ft.*
Wi-Fi		x	N/A	Up to 250 ft.**

*When used with LiftMaster® Operators with Security +2.0® Radio

**When used with LiftMaster® Gate Operator mfg. after Nov. 2017

© 2021 The Chamberlain Group, Inc. All Rights Reserved. myQ®, the myQ® logo, myQ® Community, LiftMaster, the LiftMaster logo, are registered trademarks of the Chamberlain Group, Inc. LiftMaster.com
LMACENDSCAPXM 5/21

LiftMaster