


# Micro Switch Locks

Medeco's 3/4" diameter, high security switch locks offer a wide range of electrical functions with the physical security and patented key control of a Medeco cylinder. Available in either single or double switch models, Medeco switch locks are ideally suited for applications requiring controlled access to electrically activated systems, including alarms, ATMs, time delay safes, encryption devices, heavy power equipment, control panels and electrically accessed doors and gates. The Medeco® 3/4 inch diameter, high security Switch Lock offer a wide range of electrical functions with the physical security and patented key control of a Medeco® cylinder. The Medeco<sup>3</sup> unique design provides triple locking action, making the locks virtually pick proof. All Medeco<sup>3</sup> keys and locks are protected under patent, trademark and copyright laws. Medeco® keys may only be duplicated by Medeco® or by an authorized Medeco® dealer, and only at your request.

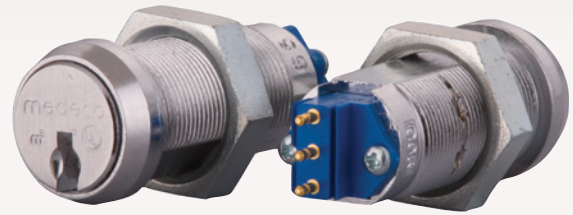

## Benefits:

- All Medeco® cylinders are constructed of durable machined brass components, designed to last the life of your equipment.
- Available in single or double switch models, momentary and maintained positions.
- Silver or gold contacts (for low amperage applications) designed to accept quick connect leads.
- Hardened stainless steel inserts inside the cylinder provide the ultimate defense against drilling and other forms of physical attack.
- Unique elevating and rotating tumbler pin system is virtually pick proof.
- Patented Medeco<sup>3</sup> keys may only be duplicated by Medeco® or an authorized Medeco® service outlet, and only at your request.
- Medeco® Switch Locks are completely serviceable, and can be re-keyed in case of lost or stolen keys.
- Locks can be keyed alike, keyed different, or master keyed depending on your specific needs.

## Certification:

- UL 437 Listed
- Switch - UL Registered, CSA Certified

## Applications:

- Medeco® High Security Switch Locks can be used in any standard 3/4 inch diameter switch lock application and a multitude of markets including:
  - Heavy Power Machinery
  - Time Delay Safes
  - Material Handline Equipment
  - Construction Vehicles
  - Electrically Accessed Gates
  - Cash Control Systems
  - Encryption Devices
  - Alarms
  - Control Panels
  - ATMs

## Warranty:

Warranted for two (2) years against manufacturer's defects. See the Medeco® limited warranty for full details.

## Technical Information:

- Five pin, 3/4 inch double "D" mounting standard.
- Available in either single or double switch models with either silver or gold contacts.
- Rated at 7 amps resistive at 125/250 VAC.
- Contacts designed to accept quick connect leads (AMP connector number 60598-3)

## Finishes:

- 26 satin chrome finish standard.
- Other finishes available, depending on volume.

## Available Key Technologies:

### Mechanical:

– Medeco<sup>3</sup>

### Single Switch Locks

Description	Part Number	Medeco <sup>3</sup>	BiLevel	Medeco X4	eCylinder
1 switch, Maintained 1 Keypull	65*2150T-011 (P)				
	65*2150T-011 (S)				
1 switch, Maintained 2 Keypull	65*2150T-012 (P)				
	65*2150T-012 (S)				
1 switch, Momentary 1 Keypull	65*2150T-021 (P)				
	65*2150T-021 (S)				

Keys are ordered separately.

### Double Switch Locks

Description	Part Number	Medeco <sup>3</sup>	BiLevel	Medeco X4	eCylinder
2 position, maintained, 1 keypull	65*2650T-101 (P)				
	65*2650T-101 (S)				
2 position, maintained, 2 keypull	65*2650T-102 (P)				
	65*2650T-102 (S)				
2 position, momentary, 1 keypull	65*2650T-111 (P)				
	65*2650T-111 (S)				
3 position, maintained, 1 keypull	65*2650T-131 (P)				
	65*2650T-131 (S)				
3 position, maintained, 2 keypull	65*2650T-132 (P)				
	65*2650T-132 (S)				
3 position, maintained, 3 keypull	65*2650T-133 (P)				
	65*2650T-133 (S)				

Keys are ordered separately.

### Switch Lock Accessories for 65\*2150 and 65\*2650

Description	Part Number
Double Pole/Double Throw	CP-150082
Gold Sub Miniature Snap Action Switch. Double Pole/Double Throw	CP-150102
Sleeve Kit. Includes chrome plated zinc sleeve with rubber grommet, plain washer, 1 pronged washer locks for mounting cam locks in harsh environments.	65-0003
Silver Sub Miniature Snap Action Switch. Single Pole-Single or Double Throw	CP-150142
Gold Sub Miniature Snap Action Switch. Single Pole-Single or Double Throw	CP-150152
4" Leadwire	CP-270511
6" Leadwire	CP-270521
12" Leadwire	CP-270531
18" Leadwire	CP-270541
24" Leadwire	CP-270551
36" Leadwire	CP-270561

\*\*Refer to the eCylinder section for more detail on specific technologies available and pricing. The \* in the part number is replaced with:  
 T = Medeco<sup>3</sup>, S = Medeco<sup>3</sup> Logic, J = Medeco<sup>3</sup> BiLevel, W = Biaxial, V = Medeco Biaxial Logic, K = Medeco KM, N = Medeco X4, C = Medeco Logic,  
 "-" = Original, Z = Medeco Original KW Logic, G = Medeco XT \*\*\*See key section for surcharges for custom coined cut keys or special stamping requirements.  
**Note: (P)** refers to **Pinned** and **(S)** to **Sub-Pinned** at the end of each part string in the price book.

# Rotary Switch Locks

The Medeco® Rotary Switch Lock is designed for use with most brands of rotary switches, providing maximum versatility in systems requiring multiple switch functions. Switch Locks are available with a variety of key withdrawals at either 45 degrees or 30 degree increments. Positive stops are available to eliminate over-torquing of switch stops. Switch locks use a five pin cylinder to maximize keyed different and master keying capabilities. Medeco® design and engineering resources are available to assist customers with special functional requirements. The Medeco<sup>3</sup> unique design provides triple locking action, making the locks virtually pick proof. All Medeco<sup>3</sup> keys and locks are protected under patent, trademark and copyright laws. Medeco<sup>3</sup> keys may only be duplicated by Medeco® or by an authorized Medeco® dealer, and only at your request.



## Benefits:

- All Medeco cylinders are constructed of durable machined brass components, designed to last the life of your equipment.
- Hardened stainless steel inserts inside the cylinder provide the ultimate defense against drilling and other forms of physical attack.
- Unique elevating and rotating tumbler pin system is virtually pick proof.
- Patented Medeco<sup>3</sup> keys may only be duplicated by Medeco® or an authorized Medeco® service outlet, and only at your request.
- Medeco® Switch Locks are completely serviceable, and can be re-keyed in case of lost or stolen keys.
- Locks can be keyed alike, keyed different, or master keyed depending on your specific needs.

## Warranty:

Warranted for two (2) years against manufacturer's defects. See the Medeco® limited warranty for full details.

## Technical Information:

- Five pin, 3/4 inch double "D" mounting standard.

## Finishes:

- 26 satin chrome finish standard.
- Other finishes available, depending on volume.

## Certification:

- Switch - UL Registered, CSA Certified

## Applications:

- Medeco® Rotary Switch Locks can be used to retrofit many switch lock applications including:
  - Heavy Power Machinery
  - Time Delay Safes
  - Material Handline Equipment
  - Construction Vehicles
  - Electrically Accessed Gates
  - Cash Control Systems
  - Encryption Devices
  - Alarms
  - Control Panels
  - ATMs

## Available Key Technologies:

### Mechanical:

- Medeco<sup>3</sup>

### Double Switch Rotary

Description	Part Number	Medeco <sup>3</sup>	BiLevel	Medeco X4	eCylinder
2 position, 1 keypull A, maintained at B	65*22560T-121 (P)				
	65*22560T-121 (S)				
2 position, 2 keypull A&B, maintained	65*22560T-122 (P)				
	65*22560T-122 (S)				
3 position, 2 keypull A&B, maintained	65*22560T-132 (P)				
	65*22560T-132 (S)				
3 position, 3 keypull A, B&C, maintained	65*22560T-133 (P)				
	65*22560T-133 (S)				
3 position, 2 keypull A&C, maintained at B	65*22560T-134 (P)				
	65*22560T-134 (S)				
2 position, 1 keypull A, momentary at B	65*22560T-221 (P)				
	65*22560T-221 (S)				

Keys ordered separately.

\*\*Refer to the eCylinder section for more detail on specific technologies available and pricing. The \* in the part number is replaced with:  
 T = Medeco<sup>3</sup>, S = Medeco<sup>3</sup> Logic, J = Medeco<sup>3</sup> BiLevel, W = Biaxial, V = Medeco Biaxial Logic, K = Medeco KM, N = Medeco X4, C = Medeco Logic,  
 “-” = Original, Z = Medeco Original KW Logic, G = Medeco XT \*\*\*See key section for surcharges for custom coined cut keys or special stamping requirements.  
**Note: (P)** refers to **Pinned** and **(S)** to **Sub-Pinned** at the end of each part string in the price book.