BEYOND SECURITY KABA®

# Simplex® *EE1000*



## Features

*Access Control*
Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides interior and exterior access by combination.

*No Battery*
Fully mechanical lock eliminates the material and labor expense of battery replacements

*Number of Codes*
Single access code—one easy-to-manage code for all users

*Programming*
Lock is easily programmed via keypad without removing lock from the door


*Handing*
Factory-handed for left-hand doors; field reversible

*Key Override (Optional)*
Small format interchangeable cores, large format removable cores

*Operation Modes*
- Pushbutton entry
- Pushbutton egress


*Economical*
A cost effective access control solution

**Model 101x/101x**




- Combination Entry
- Combination Egress

**Model 102x/101x**




- Combination Entry
- Combination Egress
- Key Override Entry (not supplied)

**Model 102x/102x**



- Combination Entry
- Combination Egress
- Key Override Entry (not supplied)
- Key Override Egress (not supplied)

| | |
|---|---|
| ***Mechanical Features*** | |
| *Construction* | Heavy-duty cylindrical lock with cast front and back housings; cast knobs |
| *Locking Device* | Cylindrical latch with 3-hour UL/ULC fire rating on “A” labeled doors |
| *Numeric Keypad* | Vandal resistant, solid metal pushbuttons |
| *Door Handing* | Factory-handed for left-hand doors; easily field reversible |
| *Standard Finishes* | Antique Brass 05 (609), Satin Chrome 26D (626) |
| *Optional Finishes* | Bright Chrome 026 (625), Bright Brass 03 (605) |
| *Backset* | 2¾” (70 mm) |
| *Latch* | ½” (13 mm) throw latch, ¾” (19 mm) throw latch (optional) |
| *Strike* | Standard strike plate; ASA strike plate |
| *Minimum Stile Recommended* | 5” (127 mm) |
| *Weight* | 10.25 lbs. (4.6 kg) |
| ***Key Override*** | |
| *Interchangeable Cores* | Small format—Best and equivalents (6 or 7-pin length); core not included |
| *Removable Cores* | Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length);<br>Corbin Russwin (6-pin length); Schlage, and Sargent; core not included |
| ***Installation*** | |
| *Door Preparation* | ASA 161-door preparation with additional through bore holes |
| *Door Thickness* | 1¾” (44 mm) to 2¼” (57 mm); modified lock for more than 2” (51) thick door (up to 2¼”) available (specify when ordering) |
| *Items Supplied Include* | Lock assembly, installation manual, full-scale template, combination change tool, and required installation hardware |
| ***Certification and Testing*** | |
| *Durability* | Weather resistant |
| *Fire Rating* | 3-hour UL/ULC fire rating for “A” labeled doors |
| ***Warranty*** | |
| *Warranty* | 1-year warranty |

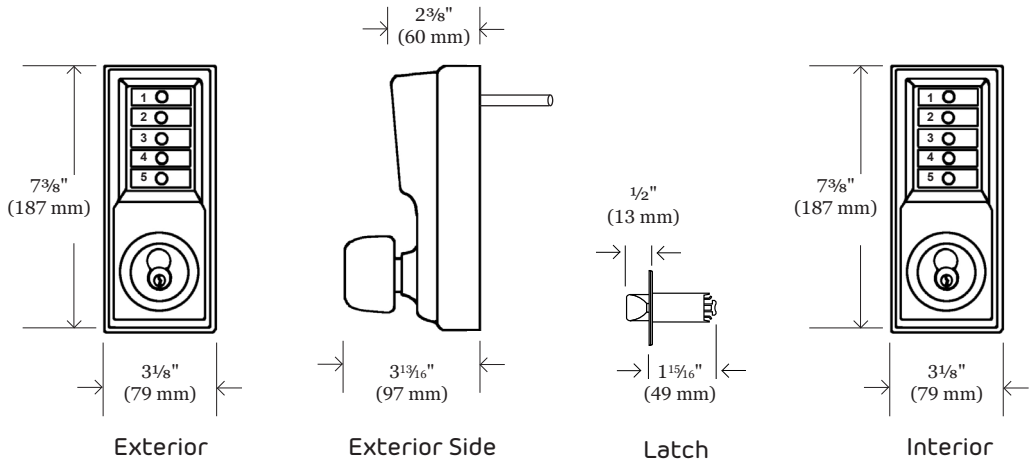


Kaba Access & Data Systems Americas
Winston-Salem NC 27105
1-800-849-8324
www.kaba-adsamericas.com