



# Popular double door applications

## Single door applications




Single mortise lock device




Single rim device


## Double door applications



Mortise lock and surface mounted or concealed vertical cable/rod device combination—same direction





Two rim devices with mullion—same direction




Two vertical rods—double egress


## Door handing

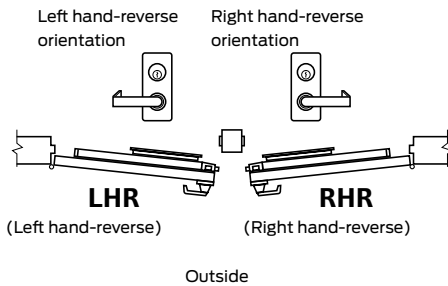

Two surface mounted vertical rod devices—same direction (do not use with overlapping astragal)



Two fire exit hardware vertical cables/rods with auxiliary fire latch-LBR option



Two concealed vertical cables/rods

# Outside trim operation

## Trim operation lever or knob

### Standard



Key locks and unlocks lever or knob, e.g., 996L (Classroom)

### Night latch



Key retracts latch bolt. Lever or knob is rigid. Use NL suffix, e.g., 996LNL. (Storeroom)

### Blank escutcheon



Lever or knob always active. Use BE suffix, e.g., 996L-BE. (Passage)

### Dummy



Lever or knob rigid for pull operation. Use DT suffix, e.g., 996L-DT.

## 996L Breakaway™ lever



The 996L Breakaway trim has become the standard lever trim offering on the 98L/99L Series devices. The Breakaway design is especially effective in areas where vandalism to door hardware is a problem. The design intent is to discourage costly repairs from becoming necessary. The Breakaway feature is not available on the NL (night-latch) or DT (dummy trim) versions.

## 374T/376T Series thumbturn control



Standard operation, key locks and unlocks thumbturn. Optional operation, key unlocks thumbturn, re-locks when key is removed. This operation is created by changing the cylinder plate included with control. Use 1 1/4" mortise cylinder with a straight cam. Schlage cam reference B502-191. Use with a pull trim (990DT pictured).

# Lever styles

## Decorative levers



**M51**  
Knurling available



**M52**  
Knurling available



**M53**



**M54**



**M55**



**M56**



**M57** ..



**M61**  
(Handed)



**M62** ..  
(Handed)



**M63**  
(Handed)



**M81**  
Knurling available



**M82**



**M83**



**M84**



**M85**  
(Handed)

.. Available in Stainless Steel substrate ONLY.

## Standard Levers



**01**



**02**  
Knurling available



**03\***  
Knurling available



**05**



**06\***  
Default lever  
Knurling available



**07**



**12**  
(Handed)



**16**  
(Omega)



**17\***  
Knurling available



**18**



**ACC**  
(Accent)  
(Handed)



**AST**  
(Asti)  
(Handed)



**MER**  
(Merano)  
(Handed)



**STA**  
(St. Annes)  
(Handed)



**LAT\***  
Latitude



**LON\***  
Longitude

\*Available in Stainless Steel - specify SS when ordering