





CX-1000/74 MICROMINDER

FEATURES

- ULTRA COMPACT DESIGN
- ADJUSTABLE DELAY FROM 1-30 SECONDS
- 12 - 24 VOLTS AC OR DC
- COLOR CODED LEADS
- MOUNTED IN CONVENIENT PLASTIC CASE
- SPDT CONTACTS RATED AT 3 AMPS @ 28V DC



CX-1000/74

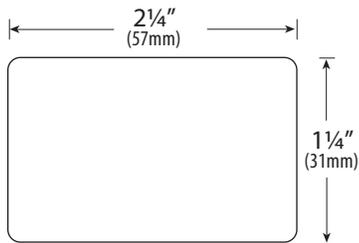

CX-1000/74

DESCRIPTION

CAMDEN DOOR CONTROLS CX-1000/74 MicroMinder is a flexible easy-to-operate, delay on release timer which operates on 12 to 24 Volts AC/DC. The delay is adjustable from 1 to 30 seconds, and is accessed through a hole in the cover. The Form C relay output is rated at 3 amps @ 28V DC. The input may be a dry contact such as a wall switch.

The compact enclosure protects the relay should it be placed inside a metal box, operator housing, or in the ceiling or wall cavity. The circuit board may be removed from the enclosure if space is at a premium.

APPLICATION


The MicroMinder is ideal for automatic door operators which do not have built in time delays.

It is also suitable for (de) energizing an electric strike or electromagnet for an adjustable time period, or any other application requiring a quality dependable timer.

MICROMINDER



TYPICAL APPLICATION

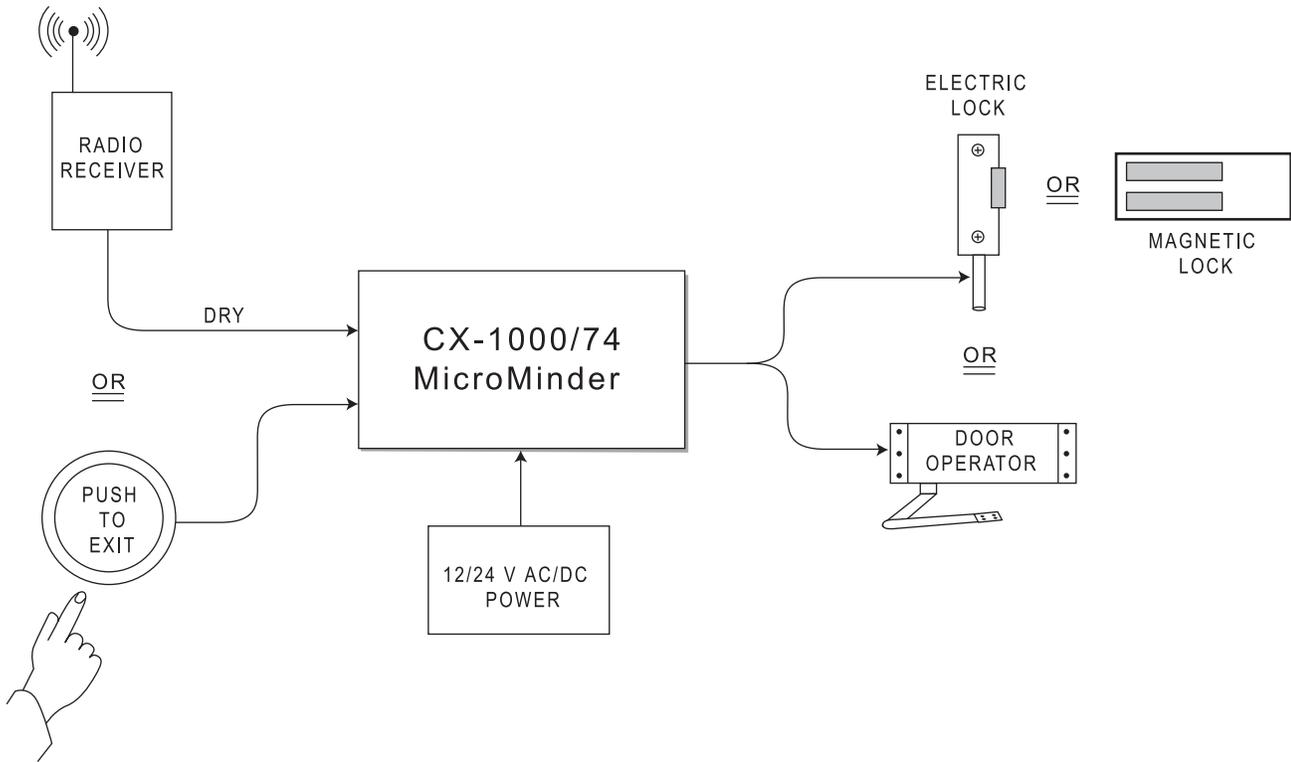

SPECIFICATIONS

SIZE	2 1/4" L X 1 1/4" W X 3/4" H (57 MM X 32 MM X 19 MM)
MOUNTING	DOUBLE SIDED FOAM TAPE
ENCLOSURE	BLACK STYRENE PLASTIC
OPERATING VOLTAGE	12 - 24 VOLTS AC/DC
CURRENT DRAW	20 MA IDLE, 33 MA OPERATING
RESPONSE TIME	.03 SECONDS
INPUT	N.O. DRY CONTACT
RELAY OUTPUT	FORM C (SPDT)
CONTACT RATING	3 AMPS @ 30V DC
ELECTRICAL LIFE	100,000 @ RATED CAPACITY
TIME DELAY	1 - 30 SECONDS