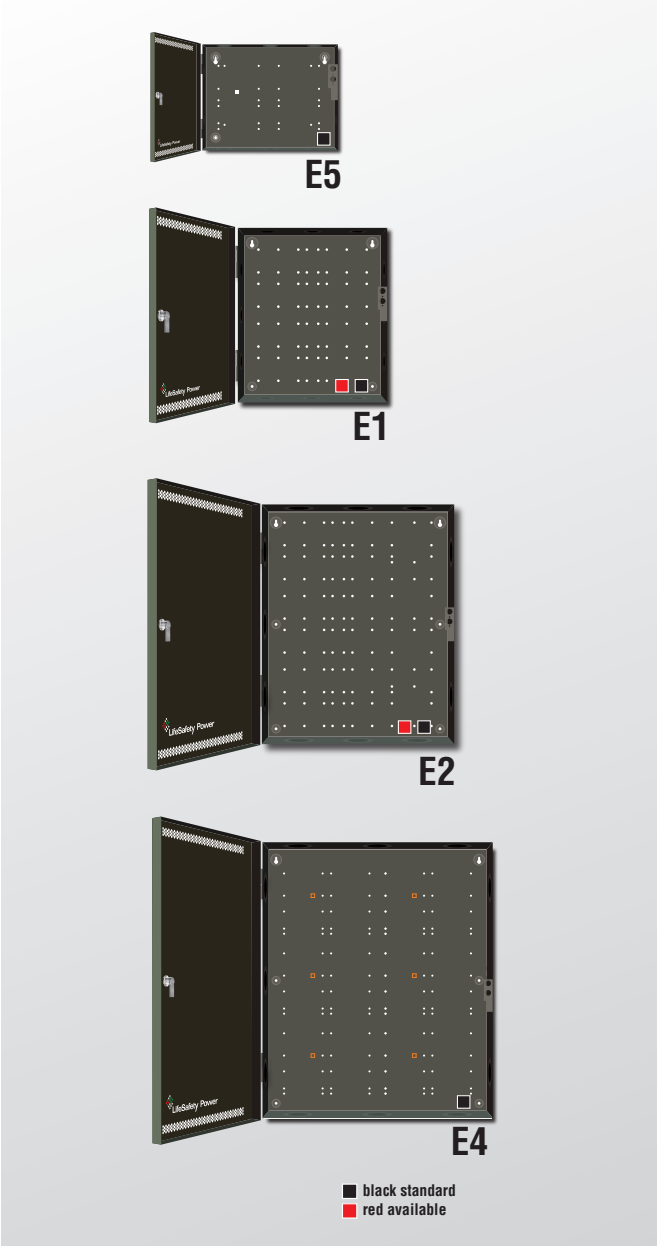

Overview

FlexPower's standard E series are painted, steel, locking enclosures with integral battery space for low voltage power applications. E Series mount LifeSafety Power AC, DC power supplies and distribution modules in multiple configurations for maximum flexibility.

Prewired for standard grounding, a lockset is provided with the enclosure for all disciplines except CCTV.

Features

- High grade steel design with lock and key included
- Pre-punched back wall pattern acommodates all FlexPower AC or DC power supplies and accessory boards in multiple configurations
- Rear stand-offs allow field upgrading without removing cabinet from the wall
- Ample 1/2" and 1 1/4" knockouts
- Removable door for easier service
- Red color available on select models

Model No.	Height x Width x Depth		Weight
E1	14 x 12 x 4.5''	(356 x 305 x 114mm)	8 lbs. (3.5 kg)
E2	20 x 16 x 4.5''	(508 x 406 x 114mm)	18 lbs. (8.0 kg)
E4	24 x 20 x 6.5''	(610 x 508 x 165mm)	23 lbs. (10.4 kg)
E5	8.5 x 11 x 3.0''	(216 x 280 x 76mm)	4 lbs. (2 kg)

For red color add "R" suffix to part number (ie. E1R)

E1 Enclosure - Mechanical Specifications

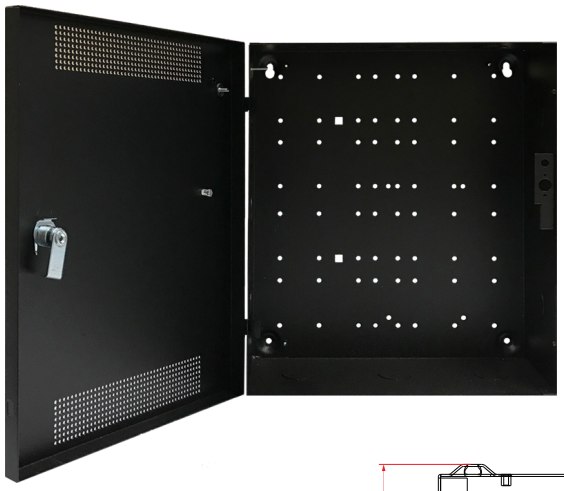

Dimensions (H x W x D)

14.00” x 12.00” x 4.50” (36 x 31 x 11.4 cm)

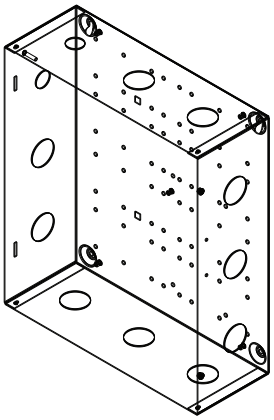

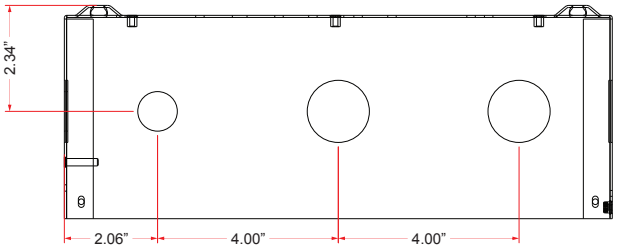

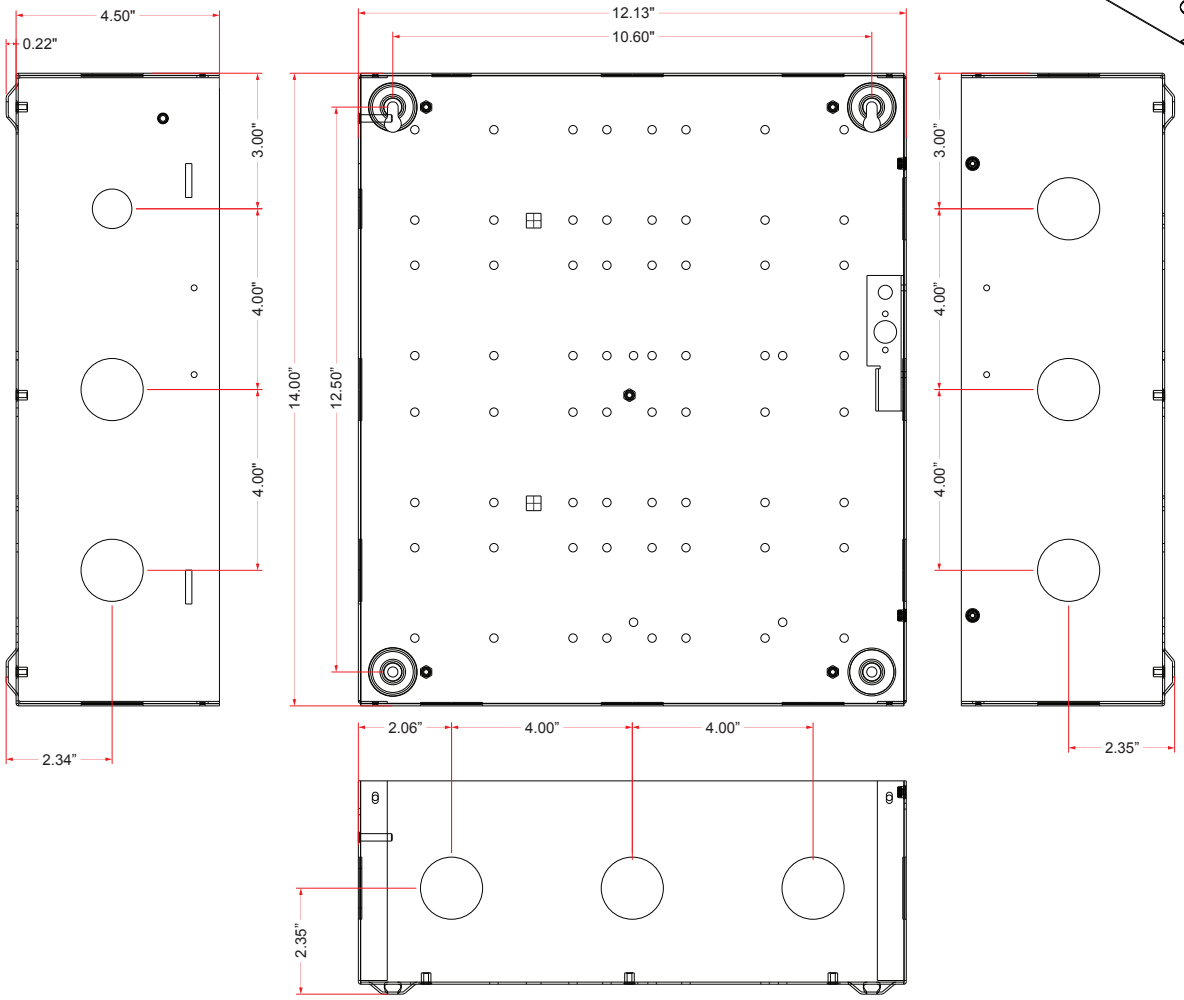

E2 Enclosure - Mechanical Specifications

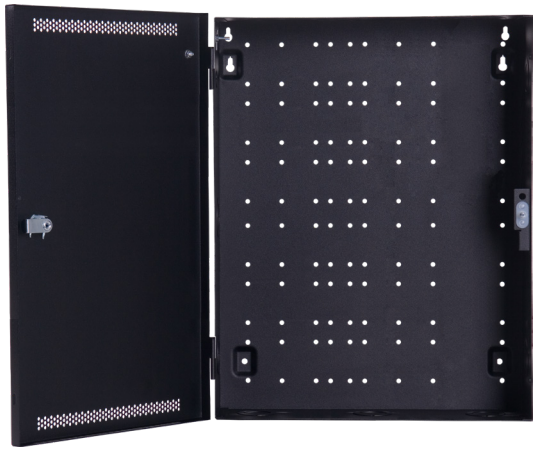

Dimensions (H x W x D)

20.00” x 16.00” x 4.50” (51 x 41 x 11.4 cm)

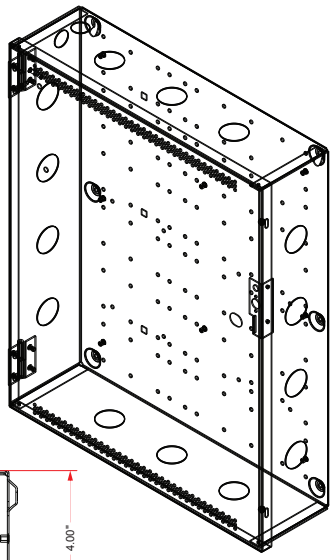

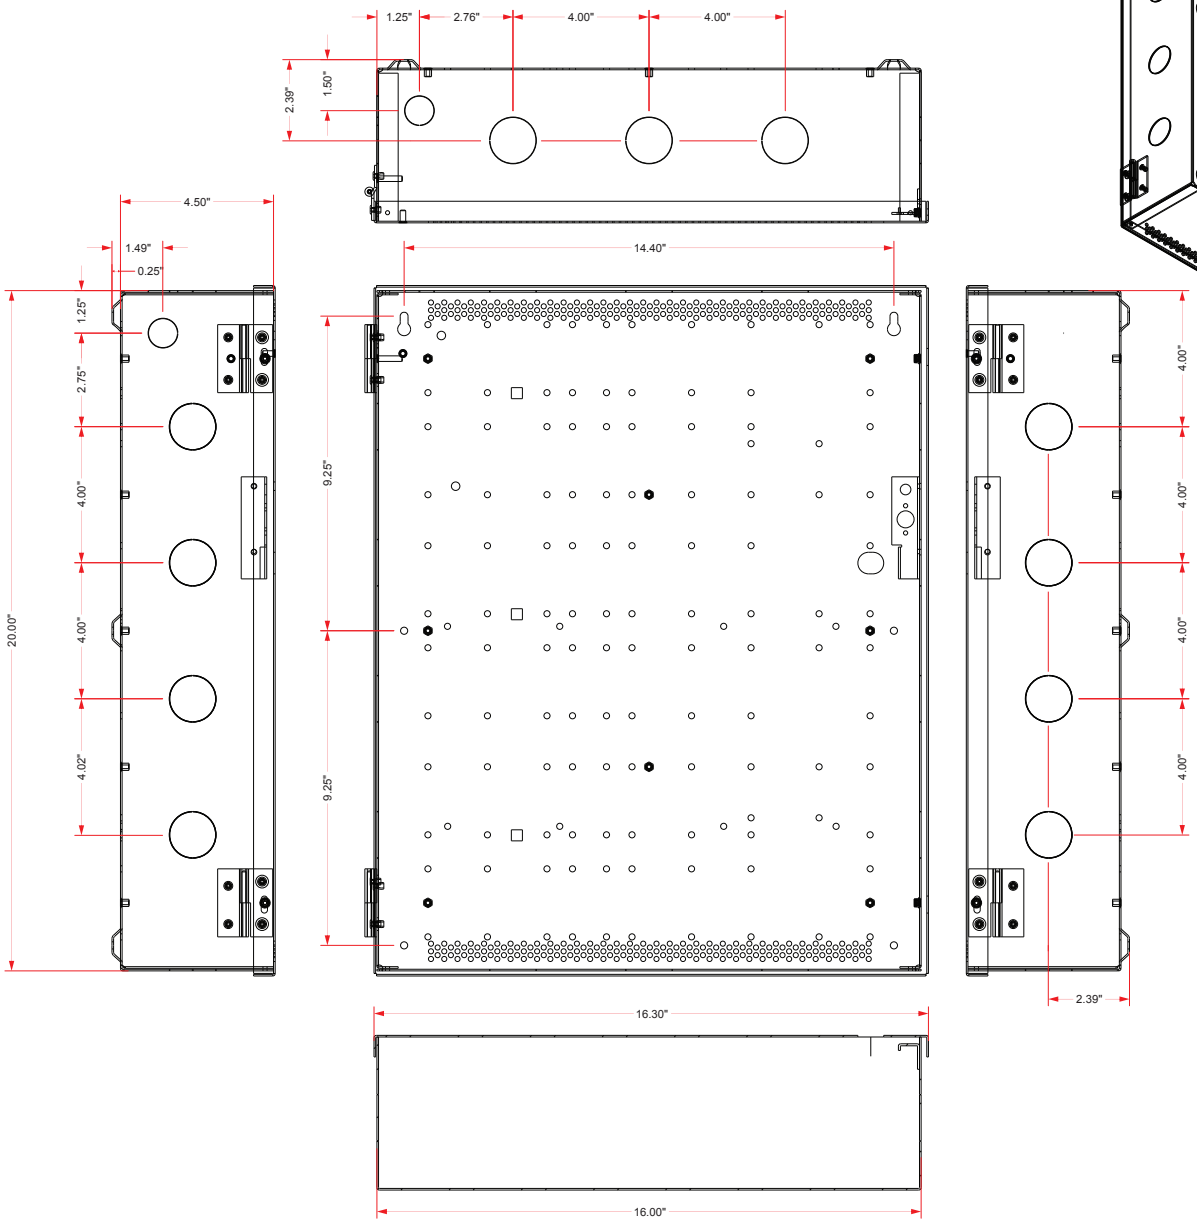

E4 Enclosure - Mechanical Specifications

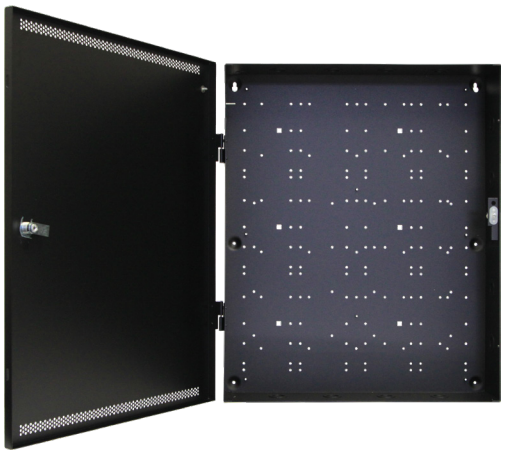

Enclosure Dimensions (H x W x D)

24.00” x 20.00” x 6.50” (61 x 51 x 16.5 cm)

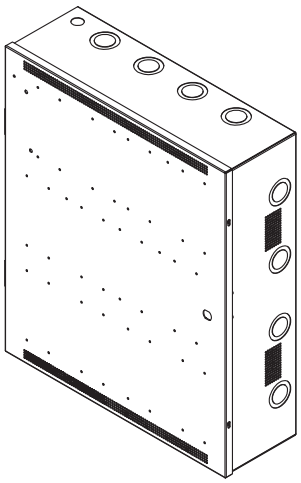

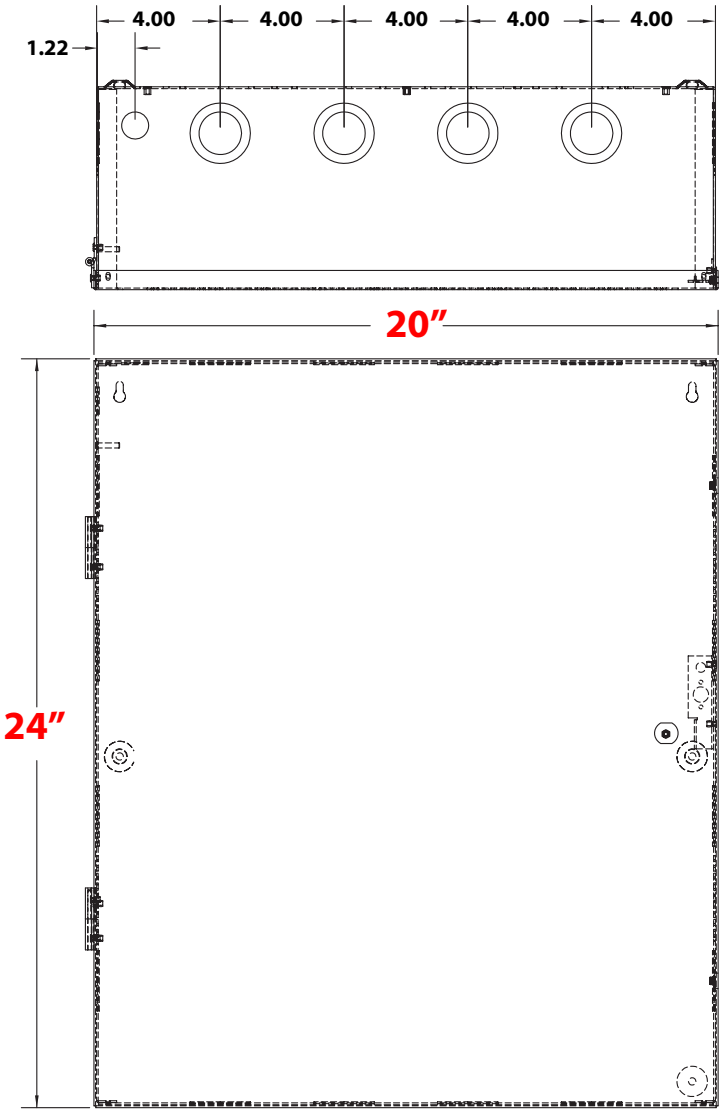

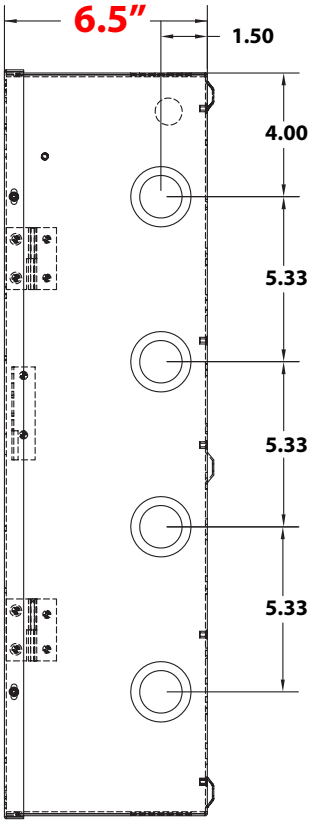

E5 Enclosure - Mechanical Specifications

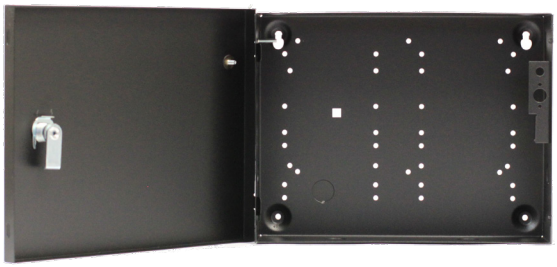

Enclosure Dimensions (H x W x D)

8.50” x 11.00” x 3.0” (22 x 28 x 7.6 cm)

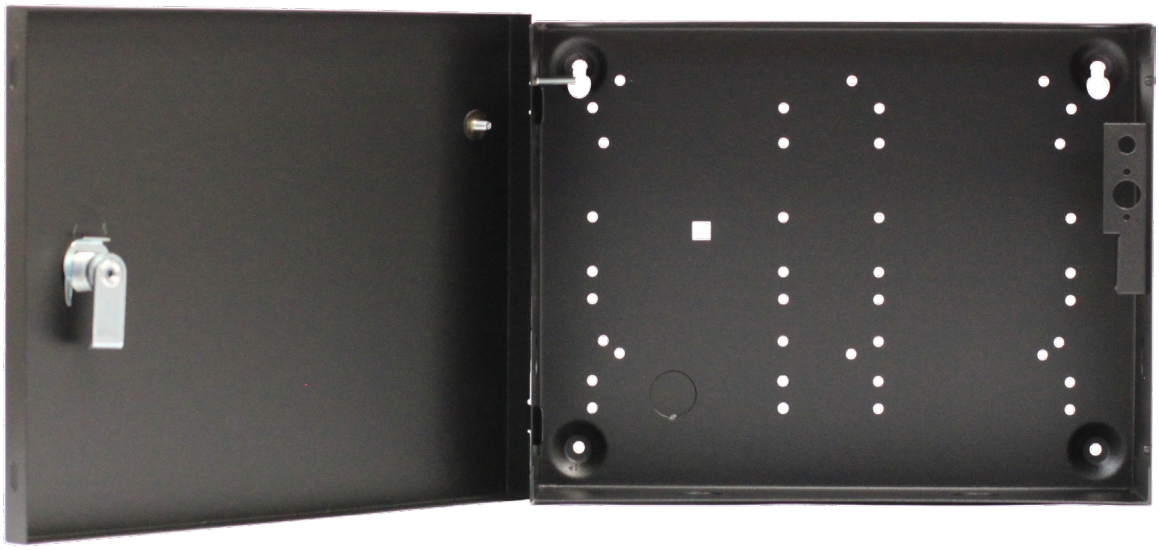

LifeSafety Power, Inc.
899 E Park Avenue
Libertyville, IL 60048 USA
PH 888-577-2898
info1@lifesafetypower.com

Important: *All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. LifeSafety Power makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. LifeSafety Power's only obligations are those in the LifeSafety Power Standard Terms and Conditions of Sale for this product, and in no case will LifeSafety Power or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, LifeSafety Power reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.*

© 2019 LifeSafety Power Inc. P01-369A 06/19 *LifeSafety Power, FlexPower, DataLink, GreenSmart, FlexConnect, PowerCom, Reliability+, SureCharge, TruWatt, and VSelect are registered trademarks of LifeSafety Power Inc. or its affiliates.*