

Part No.: R001006R

Applications:

This document establishes the specifications for a two conductor unshielded cable used for audio, and remote control applications, suitable for outdoor use

Construction Details:


Number of Conductors: 2/C
 Conductor: 18AWG Stranded Bare Copper
 Insulation Material: Polyvinyl Chloride
 Nominal Insulation Thickness: 0.008 in.
 Nominal Insulation Diameter: 0.062 in.
 Color Code: Black, Red
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.154 in.
 Surface Print: 3122598 CMR 18AWG C(ETL)US
 FT4 A B C D E F 0 1 2 3 4 5 6 7 8
 9...SUITABLE FOR OUTDOOR
 USE + Sequential Footage Marking

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Technical Details:

Temperature Rating	Operation	-20°C to +60°C.
Nominal Weight:	17 lbs. / 1,000 feet	

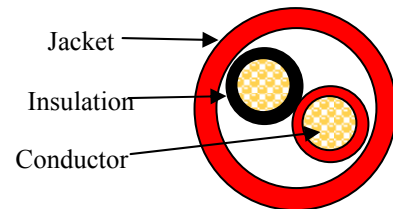

Standards:

- NEC Article 800
- UL Subject 444, CMR FT4

Codes & Listings:

- C(ETL)US

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



C ETL LISTED US

Issue Date: 03/11
Revision: 1

All warranty information can be viewed at WWW.REMEE.COM.

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: www.remee.com

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.