


Part No.: 725180

### Applications:

This document establishes the specifications for a plenum rated two conductor unshielded cable used for communication applications

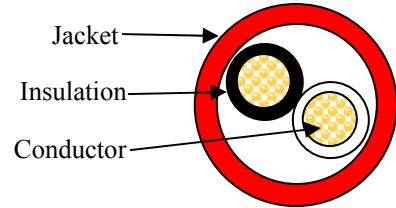

### Construction Details:

Number of Conductors: 2/C  
 Conductor: 18AWG Stranded Bare Copper  
 Insulation Material: Ramguard Plenum Polymer  
 Nominal Insulation Thickness: 0.007 in.  
 Nominal Insulation Diameter: 0.060 in.  
 Color Code: Black, Natural  
 Jacket Material: Remguard Plenum Polymer  
 Nominal Jacket Thickness: 0.015 in.  
 Nominal Diameter: 0.150 in.  
 Surface Print: 3122598 CMP 18AWG C(ETL)US  
 FT6 + Sequential Footage Marking

### Electricals:

Suggested Working Voltage: 300 Volts, rms.

### Technical Details:

Temperature Rating

Operation: -2°C to +60°C

Nominal Weight:

17 lbs. / 1,000 ft.

### Standards:

- NEC Article 800
- CMP Rating FT6

### Codes & Listings:

- C(ETL)US CMP

### Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.



MADE IN THE USA



Issue Date: 12/10  
Revision: 1

All warranty information can be viewed at [WWW.REMEE.COM](http://WWW.REMEE.COM).

This product is RoHS compliant to directive 2002/95/EC .

PO Box 488 468 RT17A Florida, NY 10921  
 Customer Service: 800-431-3864 Fax: 845-651-4160 Website: [www.remee.com](http://www.remee.com)

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.