


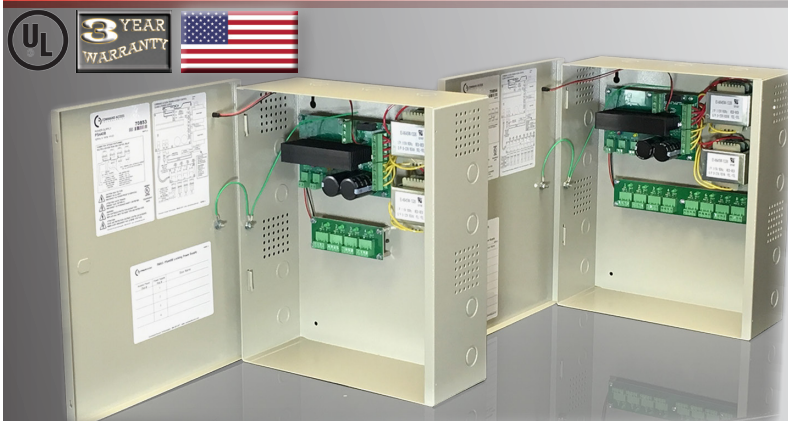

PS440/480B

- BUILT TO RUN UP TO 4 OR 8 LOCKS, EXIT TRIM & LP MOTOR/SOLENOID KITS
- ROBUST SOLID-STATE OUTPUTS - PROTECTS SYSTEM RELAYS
- INTERRUPTION FREE BATTERY BACK-UP
- BUILT TO LAST IN THE USA

PS440/480B - 110-120VAC input power supplies that deliver (4) amps @ 24VDC to (4) or (8) PTC fused outputs. (4) or (8) solid-state input triggers, protects system relays from shorts, grounds and surges.. It's linear design makes it a perfect match for solenoid & motor driven exit devices, electric locks ,electric strikes, and mag locks.

SPECIFICATIONS

INPUT VOLTAGE:

- 120 VAC, 60 Hz,
- Input Fuse: 2 Amp Fuse @ 250VAC

OUTPUT VOLTAGE:

- 4A @ 24VDC
- 4 Solid State I/O's - .75A auto resetting fused outputs
- Over-voltage protection
- Output Voltage trim pot

BATTERY BACKUP:

- Regulated, independent battery charging
- Automatic uninterrupted backup circuit
- Battery cables included
- Requires (2) 12VDC 7AH batteries
- Batteries not included

FIRE ALARM:

- Fire alarm link

LED'S:

- Red = A/C Power indicator
- Green = D/C Output indicator
- Orange + Battery Output Indicator

FEATURES & BENEFITS:

- Linear design insures ample inrush/hold current for latch retraction
- Door mounted LED Power Indicator
- Easy to remove euro connectors

LISTINGS:

- UL294 6th Edition

MECHANICAL DETAILS:

- Enclosure dimensions: PS440B (13" W x 15.5" H x 5" D); PS480B (13" W x 15.5" H x 5" D).
- 1/2" & 3/4" knockouts on all sides
- Hinge-less removable cover; Cam lock not provided
- PS440/480B accommodates (2) 12VDC 7AH batteries
- Product Weight: PS440/480B - 14 lbs
- Shipment Weight: PS440/480B - 15 lbs

ELECTRICAL:

- Temperature range: 0 to 49° C; 32 to 120° F
- Maximum humidity: 85%

Part

Easy Order

Description

PS440B

78853

4 I/O's w/battery back up.

PS480B

78854

8 I/O's w/ battery back up.

U.S. Customer Support

1-888-622-2377

Visit our website for more details

www.CommandAccess.com

Canada Customer Support

1-855-823-3002

Command Access is not a licensee, or affiliated, associated or connected with Allegion, Assa Abloy, Stanley, Schlage, Falcon, Von Duprin, Dorma, Sargent, Corbin Russwin, Yale, Emtek, Adams Rite, Best, Precision, Arrow, Design Hardware, Cal Royal, Jackson, AHT, Marshall Best, Marks, Accurate, Baldwin, FSB, PDQ, Lawrence, Trans Atlantic, Hager, LSDA, General Lock, or Omnia or any of their subsidiaries or affiliates.

Doc #20232_D

POWER SUPPLY MATRIX

	24VDC PS Line	Amperage(Continuous)	Boost Current ⁵	Inputs	Outputs (fused)	Battery Back-up (Batteries Not Included)	Fire Alarm Link	24V Power Tap (Constant power)	Locking Hardware (Mortise/Cylindrical/Exit Trim)	Latch Retraction (with LPM, PM300HO)	Latch Retraction (with PM300/Solenoid)	Latch Retraction (with MM Module/Motor)	Metal Enclosure
UL294 6E	PS204	2	3	4	4	-	✓	-	4	-	-	4	S
	PS204B	2	3	4	4	✓	✓	-	4	-	-	4	L
	PS210	1.5	2.5	1	1	-	- ¹	-	2 ²	2 ²	2 ²	2 ²	S
	PS220	2	3	2	2	-	✓	✓	2	2	2	4	S
	PS220B	2	3	2	2	✓	✓	✓	2	2	2	4	L
	PS440B	4	6	4	4	✓	✓	-	4	3	4	4	L
UL294	PS480B	4	6	8	8	✓	✓	-	8	0	8	8	L
	PS1	1	-	1	1	-	- ¹	-	2 ²	2 ²	2 ²	2 ²	S
	PS2 ⁴	2	-	2	2	-	✓	-	2	0	2	2	L
	PS2BB ⁴	2	-	2	2	✓	✓	-	2	0	2	2	L
	PS5	5	-	0	1	✓	✓	-	8 ³	6 ³	8 ³	8 ³	L
	PS5-4	5	-	4	4	✓	✓	-	4	4	4	4	L
	PS5-8	5	-	8	8	✓	✓	-	8	0	8	8	L

Small Enclosure: 11" x 11" x 4"

Large Enclosure: 13" x 15.5" x 5"

1. Uses Fire Alarm tie-in through trigger.

2. 1 output powers 2 devices/locks simultaneously

3. Up to stated devices/locks depending on distribution board or relays (by others).

4. Add Suffix (BO) for board only. Will not include metal enclosure.

5. Boost Current: Max current allowed by UL at 20% duty cycle.