

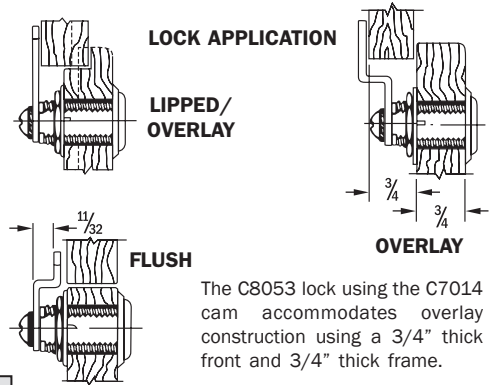
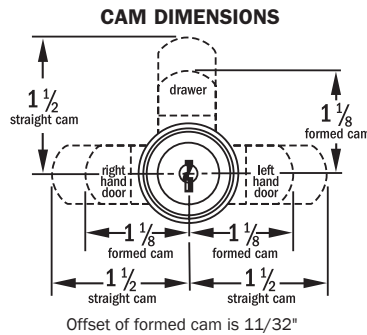


# disc tumbler cylinder cam locks

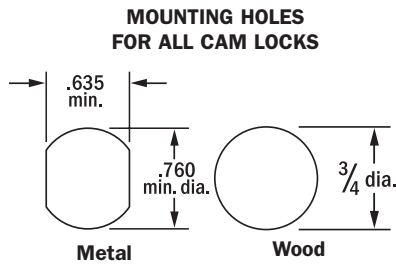

## All locks feature FlexaCam™

Three spacers enclosed with most CompX National threaded disc tumbler cam locks offer three thicknesses – providing up to 12 different dimensional variations.




**APPLICATION** – For drawers, R.H. or L.H. doors with lipped/overlay construction (straight cam) or flush construction (formed cam). For overlay application, the combined thickness of front and frame cannot exceed the cylinder length. Also see overlay detail at above right.

**OPERATION** – 90° cam turn on all locks. Key removable in both locked and unlocked positions.

**KEYING** – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

**PACKAGING** – Supplied with two keys, trim washer, spur washer (for wood), mounting nut and two cams. If flat washer (for metal) is needed, order C2015-2C separately.

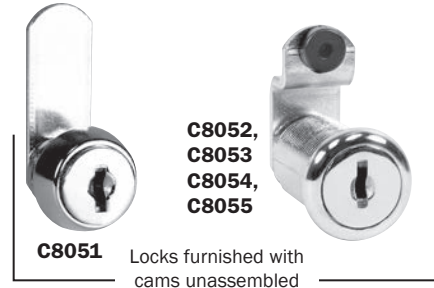


Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA * Codes	Key Changes		Reference Number	Non MK Key Blank
					KD	MKKD		
C8051-14A	Lipped/Overlay or Flush	7/16"	7/64"	10	200	200	M4-0553	D8785
C8051-3		7/16"	7/64"	3	200	—	M4-0553	D8785
C8052-14A		5/8"	15/64"	10	200	200	M4-0054	D8785
C8052-3		5/8"	15/64"	3	200	—	M4-0054	D8785
C8054-14A		15/16"	5/8"	10	200	200	M4-0054B	D8785
C8054-3		15/16"	5/8"	3	200	—	M4-0054B	D8785
C8054-4G		15/16"	5/8"	3	200	—	M4-0054B	D8785
C8053-14A		1-3/16"	7/8"	10	200	200	M4-0054C	D8785
C8053-3		1-3/16"	7/8"	6	200	200	M4-0054C	D8785
C8053-4G		1-3/16"	7/8"	6	200	200	M4-0054C	D8785
C8055-14A		1-7/16"	1-1/8"	10	200	200	M4-0054L	D8785
C8055-3		1-7/16"	1-1/8"	6	200	200	M4-0054L	D8785
C8055-4G		1-7/16"	1-1/8"	6	200	200	M4-0054L	D8785

\*Key Codes used: 3 Codes – C346A, C413A and C415A.

6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

10 Codes – C205A, C267A, C346A, C361A, C390A, C413A, C415A, C420A, C441A and C642A.

# disc tumbler reversible key cam locks

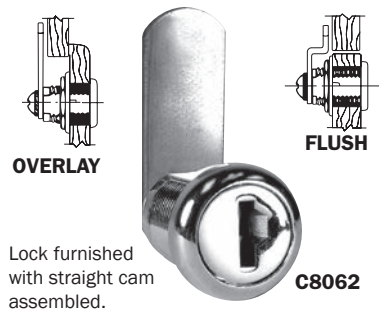

**APPLICATION** – For drawers, R.H. or L.H. doors with overlay (straight cam) or flush (formed cam) construction. For overlay application, the combined thickness of front and frame cannot exceed the 7/8" cylinder length. See above for mounting hole detail.

**OPERATION** – 90° cam turn. Key removable in both locked and unlocked positions.

**KEYING** – Reversible key operation. Keyed to SK Series; does not key with other disc tumbler locks in this catalog. See table for available keying.

**PACKAGING** – Supplied with two keys, spur washer (for wood), mounting nut and two cams. If flat washer (for metal) is needed, order C2015-2C separately.



REVERSIBLE KEY

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA * Codes	Key Changes KD	Reference Number	Key Blank
* C8062-14A	Overlay or Flush	7/8"	9/16"	1 SK1	100	M4-0300	D8777

\* Not available with FlexaCam™

STOCK  
LOCKS