




COMMAND ACCESS
TECHNOLOGIES

HINGES & POWER TRANSFER

Command Access Energy Transfer Hinge

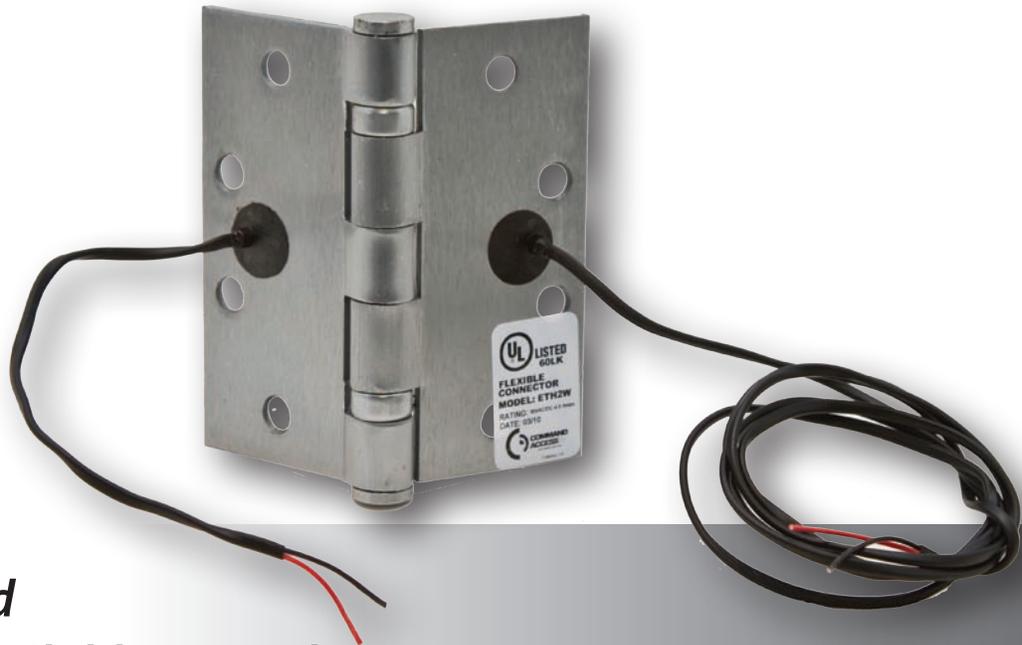

- *UL-F Rated*
- *4' Lead available at no charge*
- *Center located wire access hole*
- *Non-conductive wire access cap for added protection*
- *3-Year Warranty*

Quality, selection & pricing second to none

The Energy Transfer Hinge (ETH) is the ideal way to pass low voltage power from the hinge jamb to the lockset without having any exposed wires. These hinges are commonly used with electric mortise & cylindrical locks, electric strikes (when on a pair of doors), electric exit trims, latch pullback devices, door mounted card readers and low voltage door lights. We can modify almost any hinge and we maintain a large inventory of most major hinge brands in various sizes and finishes. Contact us if what you need is not listed.

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.CommandAccess.com

Canada Customer Support
1-855-823-3002



Configurations Available: *Molex Connectors available*

- ETH2W - 2 Wire (20 gauge) - 4A@24V (per pair)
- ETH4W - 4 Wire (26 gauge) - 1A@24V (per pair)
- ETH6W - 6 Wire (26 gauge) - 1A@24V (per pair)
- ETH8W - 8 Wire (28 gauge) - 1A@24V (per pair)
- ETH10W - 10 Wire (28 gauge) - 1A@24V (per pair)
- ETH12W - 12 Wire (28 gauge) - 1A@24V (per pair)

Configurations Available for Electric Latch Retraction: *Molex Connectors not available with heavy gauge wires*

- ETH2WH - 2 Wire (18 gauge)
- ETH4WH - 2 Wire (18 gauge) + 2 Wire (26 gauge)
- ETH6WH - 2 Wire (18 gauge) + 4 Wire (28 gauge)
- ETH8WH - 2 Wire (18 gauge) + 6 Wire (28 gauge)
- ETH10WH - 2 Wire (18 gauge) + 8 Wire (28 gauge)
- ETH12WH - 2 Wire (18 gauge) + 10 Wire (28 gauge)

Notes:

Not all configurations are available on all hinge sizes.

All hinges are made to Command Access standardized templating unless otherwise requested.

Model No.	Notes:		
Customer:	Job No./Name:	Date:	Provided by: