
# MORRIS CAT#: 10249
# Non-Insulated Double Crimp Female
# Disconnects 16-14 Wire, .020 x .187 Tab

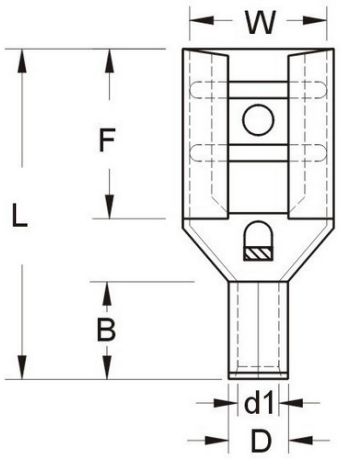


**Features:**

Non Insulated Double Crimp Female Disconnects features include:

- Manufactured from High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Brazed Seam
- Wire range stamped on the surface for easy interpretation
- Extended Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- Double Crimp: Extended Copper Sleeve for Multiple Crimps
- 302°F (150°C) 600 Volts Max
- Maximum Electric Current: 22 AWG - 3 Amp, 20 AWG - 4 Amp, 18 AWG - 7 Amp, 16 AWG - 10 Amp, 14 AWG - 15 Amp, 12 AWG - 20 Amp, 10 AWG - 24 Amp
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

**MAXIMUM ELECTRIC CURRENT:**

| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
|---|---|---|---|---|---|---|---|
| AMP | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

**MAXIMUM ELECTRIC RATING:** 302°F (150°C) 600 Volts
**TERMINAL MATERIAL:** Electro-Tin Plated Brass - Brazed Seam
**DOUBLE CRIMP:** Extended Copper Sleeve for Multiple Crimps
**FEATURES:** Serrated Barrel

DIMENSIONS = INCHES

| CAT. NO. | WIRE SIZE AWG | NEMA TAB | W | F | L | B | D | DI | BAG QTY | MASTER BAG QTY |
|---|---|---|---|---|---|---|---|---|---|---|
| 10249 | 16-14 | .020 X.187 | .199 | .248 | .543 | .189 | .130 | .091 | 100 | 1,000 |