



Catalog Number 11011
UPC Number 60198611011
Description Non-Insulated Ring Terminals
 22-16 AWG #2 Stud

Features

- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation




General

Insulation Type None
Material Copper
Finish Electro-tin plated
Color N/A
Wire Range 22-16
Stud Size #2

Dimension Information

L Inches (mm) 0.488
W Inches (mm) 0.217
D Inches (mm) 0.134
d1 Inches (mm) 0.067
d2 Inches (mm) 0.095
E Inches (mm) 0.189
F Inches (mm) 0.189
T Inches (mm) 0.03



Specifications




Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 16 AWG 18 Amps
 18 AWG 17 Amps
 20 AWG 12 Amps
 22 AWG 9 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

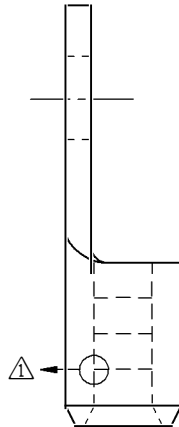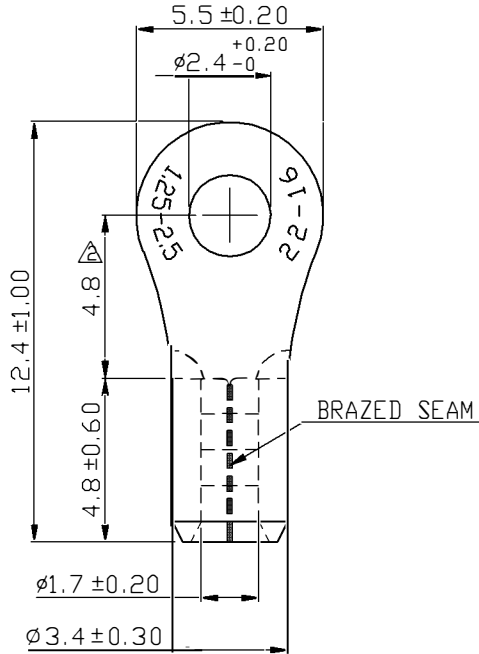

REV	DESCRIPTION	DATE
△ RDK-96036		張馨尹 2007/08/09
△ RDK-97127		謝婉如 2008/10/17
△ RDK-98020		張馨尹 2009/09/30

NOTE:

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
- WIRE RANGE : 22-16 A.W.G. ($0.5-1.5 \text{ mm}^2$)
- SURFACE TREATMENT : TIN PLATED
- THICKNESS : 0.75 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	11011	MATERIAL	COPPER	APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2006/06/30	5/1	1-3	1 OF 2	DRAWN		

Morris Products Inc. 53 Carey Rd. Queensbury, NY 12804