



Catalog Number 11116
UPC Number 60198611116
Description Non-Insulated Ring Terminals
 4 AWG



Features


- Non-Insulated
- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Brazed seam prevents splitting under maximum pressure
- Wire range stamped on the surface for easy interpretation

General

Insulation Type None
Material Copper
Finish Electro-tin plated
Color N/A
Wire Range 4 AWG
Stud Size 1/2

Dimension Information

L Inches (mm) 1.661
W Inches (mm) 0.866
D Inches (mm) 0.453
d1 Inches (mm) 0.303
d2 Inches (mm) 0.512
E Inches (mm) 0.472
F Inches (mm) 0.776
T Inches (mm) 0.067



Specifications

Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 4 AWG 125 Amps

Packaging


Bag Qty 100
Master Bag Qty 1000

Certifications

UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com

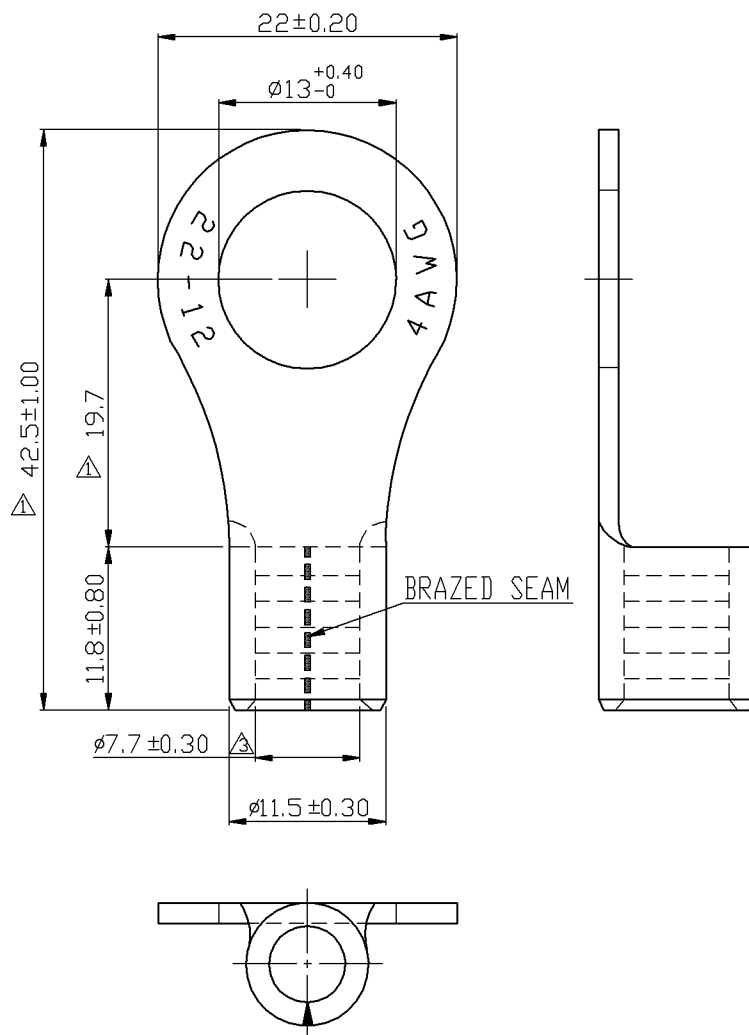

REV	DESCRIPTION	DATE
△	RDK-97127	2008/07/09
△	RDK-98020	2009/09/18
△	RDC-99171	2010/06/25

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	4		
AMP.	125		
2. WIRE RANGE : 4 A.W.G. (22 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.70 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	REF ±
>	mm ±	°	±
>	mm ±	°	±

NAME	NON-INSULATED RING TERMINALS				UNIT	mm	
PART NO.	11116	MATERIAL	COPPER	APPROVE			
NUMBER		SCALE	SHEET	PAGE	CHECKED		
DATE	2006/09/19	2/1	1-3	10F2	DRAWN		

Morris Products Inc.