




<b>Catalog Number</b>	11380
<b>UPC Number</b>	60198611380
<b>Description</b>	Nylon Insulated Ring Terminals 8 AWG



#### Features

Color Coded insulation for easy identification  
Manufactured from high strength copper alloy  
Electro-tin plated for corrosion resistance  
Expanded Insulation funnel entry eliminates strand “Hang Up”, increases the crimping rates and the reliability of the termination  
Wire range stamped on the surface for easy interpretation  
Brazed seam prevent splitting under maximum pressure  
Serrated barrel & flared position of sleeve provides excellent contact & mechanical stress relief at insulation & barrel junction

#### General

Insulation Type	Nylon
Material	Copper
Finish	Electro-tin plated
Color	Red
Wire Range	8 AWG
Stud Size	#10

#### Dimension Information

L Inches (mm)	1.232
W Inches (mm)	0.472
D Inches (mm)	0.315
d1 Inches (mm)	0.177
d2 Inches (mm)	0.209
E Inches (mm)	0.63
F Inches (mm)	0.366
T Inches (mm)	0.047

#### Specifications

Temperature Rating	105°C
Voltage Rating	600 V
Flammability Rating	UL94V-O
Amp Rating	8 AWG      70 Amps

#### Packaging


Bag Qty	100
Master Bag Qty	1000

#### Certifications

UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

[www.morrisproducts.com](http://www.morrisproducts.com)

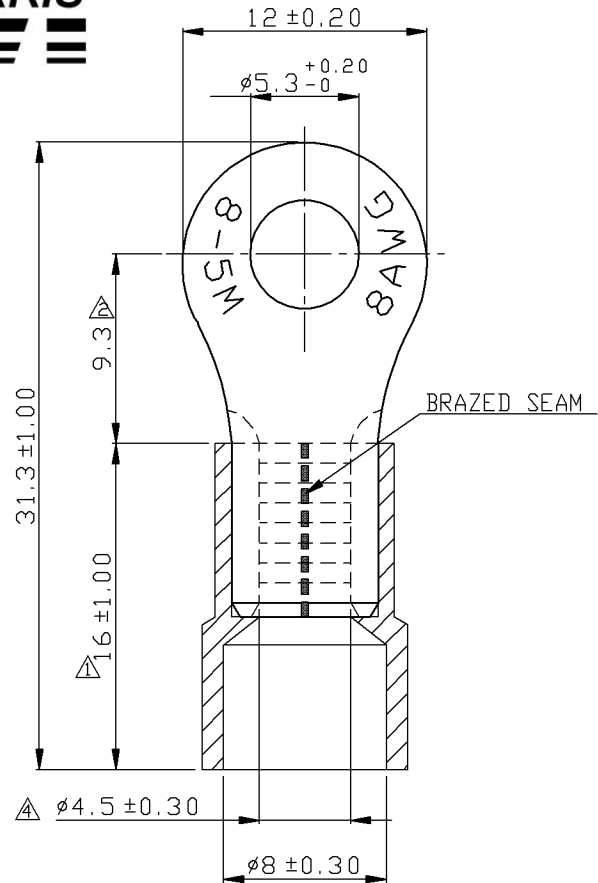

REV	DESCRIPTION	DATE
A	RDK-97127	2009/09/01
A	RDK-98020	2009/09/01
A	RDC-99179	2010/06/15

NOTE :

1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	8		
AMP.	70		
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 8 A.W.G. ( 8 mm<sup>2</sup> )
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 1.2 mm

Tolerance Unless Otherwise Specified			
0	>	mm ±	ANGLE
>		mm ±	0° > ° REF ±
>		mm ±	° > ° ±
>		mm ±	° > ° ±

NAME	NYLON-INSULATED RING TERMINALS			UNIT	mm	
PART NO.	11380	MATERIAL	-----	APPROVE		
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/05/03	3/1	1-4	10F2	DRAWN	

Morris Products Inc.