Catalog Number	11678
UPC Number	60198611678
Description	Non-Insulated Locking Fork Spade Terminals 12-10 AWG

Features
Manufactured from high strength copper alloy
Electro-tin plated for corrosion resistance
Wire range stamped on the surface for easy interpretation
Brazed seam prevents splitting under maximum pressure
Serrated barrel provides excellent electrical contact and pull-out resistance characteristics at barrel
Locking tabs on Tang for increased pull-out force resistance

General	
Insulation Type	N/A
Material	Copper
Finish	Electro-tin plated
Color	N/A
Wire Range	12-10 AWG
Stud Size	#10

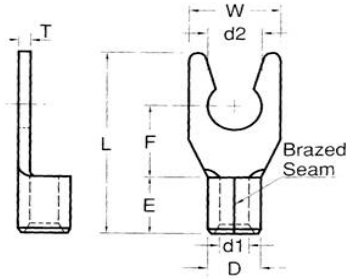

Dimension Information	
L Inches (mm)	0.717
W Inches (mm)	0.354
D Inches (mm)	0.22
d1 Inches (mm)	0.134
d2 Inches (mm)	0.209
E Inches (mm)	0.236
F Inches (mm)	0.276
T Inches (mm)	0.039

Specifications		
Temperature Rating	150°C	
Voltage Rating	600 V	
Flammability Rating	N/A	
Amp Rating	12 AWG	35 Amps
	10 AWG	50 Amps

Packaging	
Bag Qty	100
Master Bag Qty	1000

Certifications	
UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804
www.morrisproducts.com

REV	DESCRIPTION	DATE
⚠1	RDK-97127	2008/07/23
⚠2	RDK-98020	2009/08/28

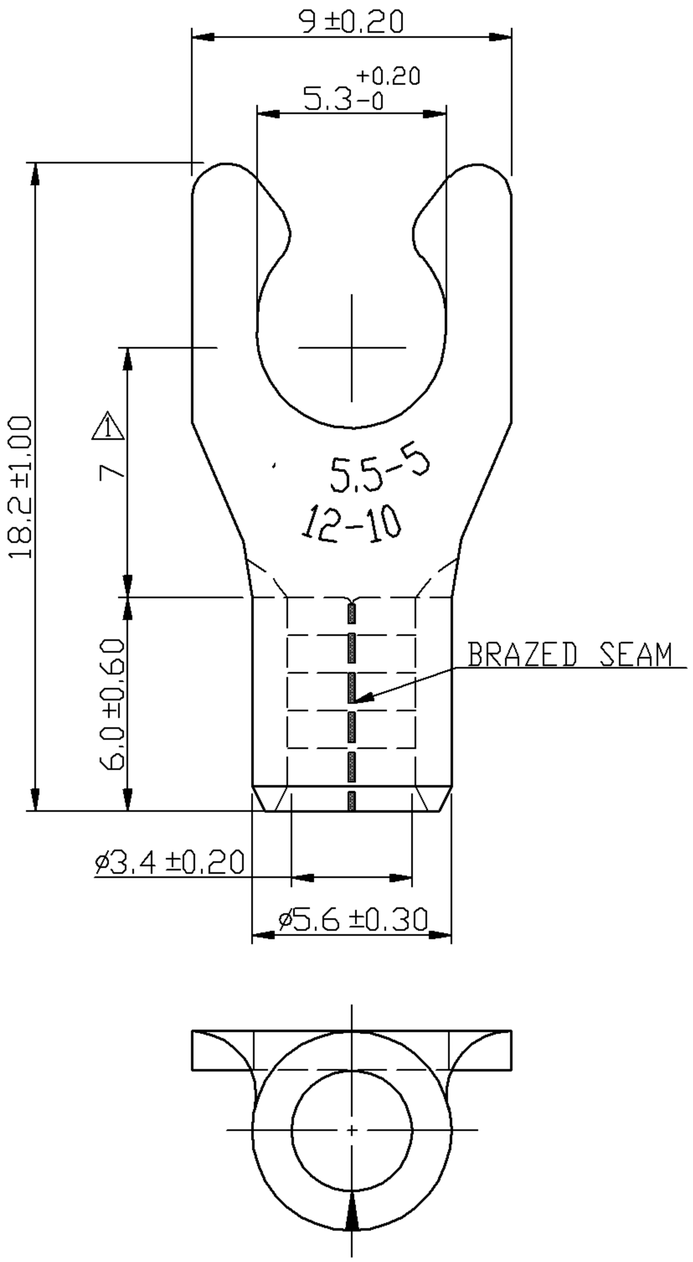

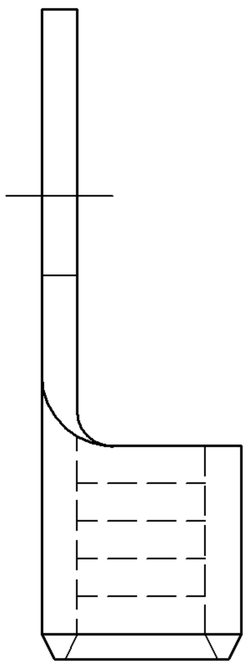

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	12	10		
AMP.	35	50		

2. WIRE RANGE : 12-10 A.W.G. (4 - 6 mm^2)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.00 mm

⚠2 Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°>	° REF ±
>	mm ±	°>	° ±
>	mm ±	°>	° ±

NAME	NON-INSULATED LOCKING SPADE TERMINALS				UNIT	mm
PART NO.	11678	MATERIAL	COPPER		APPROVE	
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/04/11	4/1	1-2	1OF2	DRAWN	

Morris Products Inc
53 Carey Rd Queensbury, NY 12804