



Catalog Number 11824
UPC Number 60198611824
Description Non-Insulated Pin Terminal
 16-14 AWG



Features


- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Easy entry expanded barrel eliminates strand "Hang Up", increases the crimping rates and the reliability of the termination
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel provides excellent contact & mechanical pull-out force resistance
- Excellent for terminal block applications

General

Insulation Type N/A
Material Copper Tubular/Copper Plate
Finish Electro-Tin Plated
Color N/A
Wire Range 16-14
Stud Size N/A

Dimension Information

L Inches (mm) 0.661
D Inches (mm) 0.161
D1 Inches (mm) 0.091
E Inches (mm) 0.189
F Inches (mm) 0.472
W Inches (mm) 0.075
T Inches (mm) 0.031



Specifications

Temperature Rating 150°C
Voltage Rating 600 V
Flammability Rating N/A
Amp Rating 14 AWG 30 Amps
 16 AWG 18 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications


UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
①	RDK-97127	2008/11/28
②	RDK-98020	2009/05/25
③	RDC-98281	2009/05/25
④	RDC-98308	2009/06/04

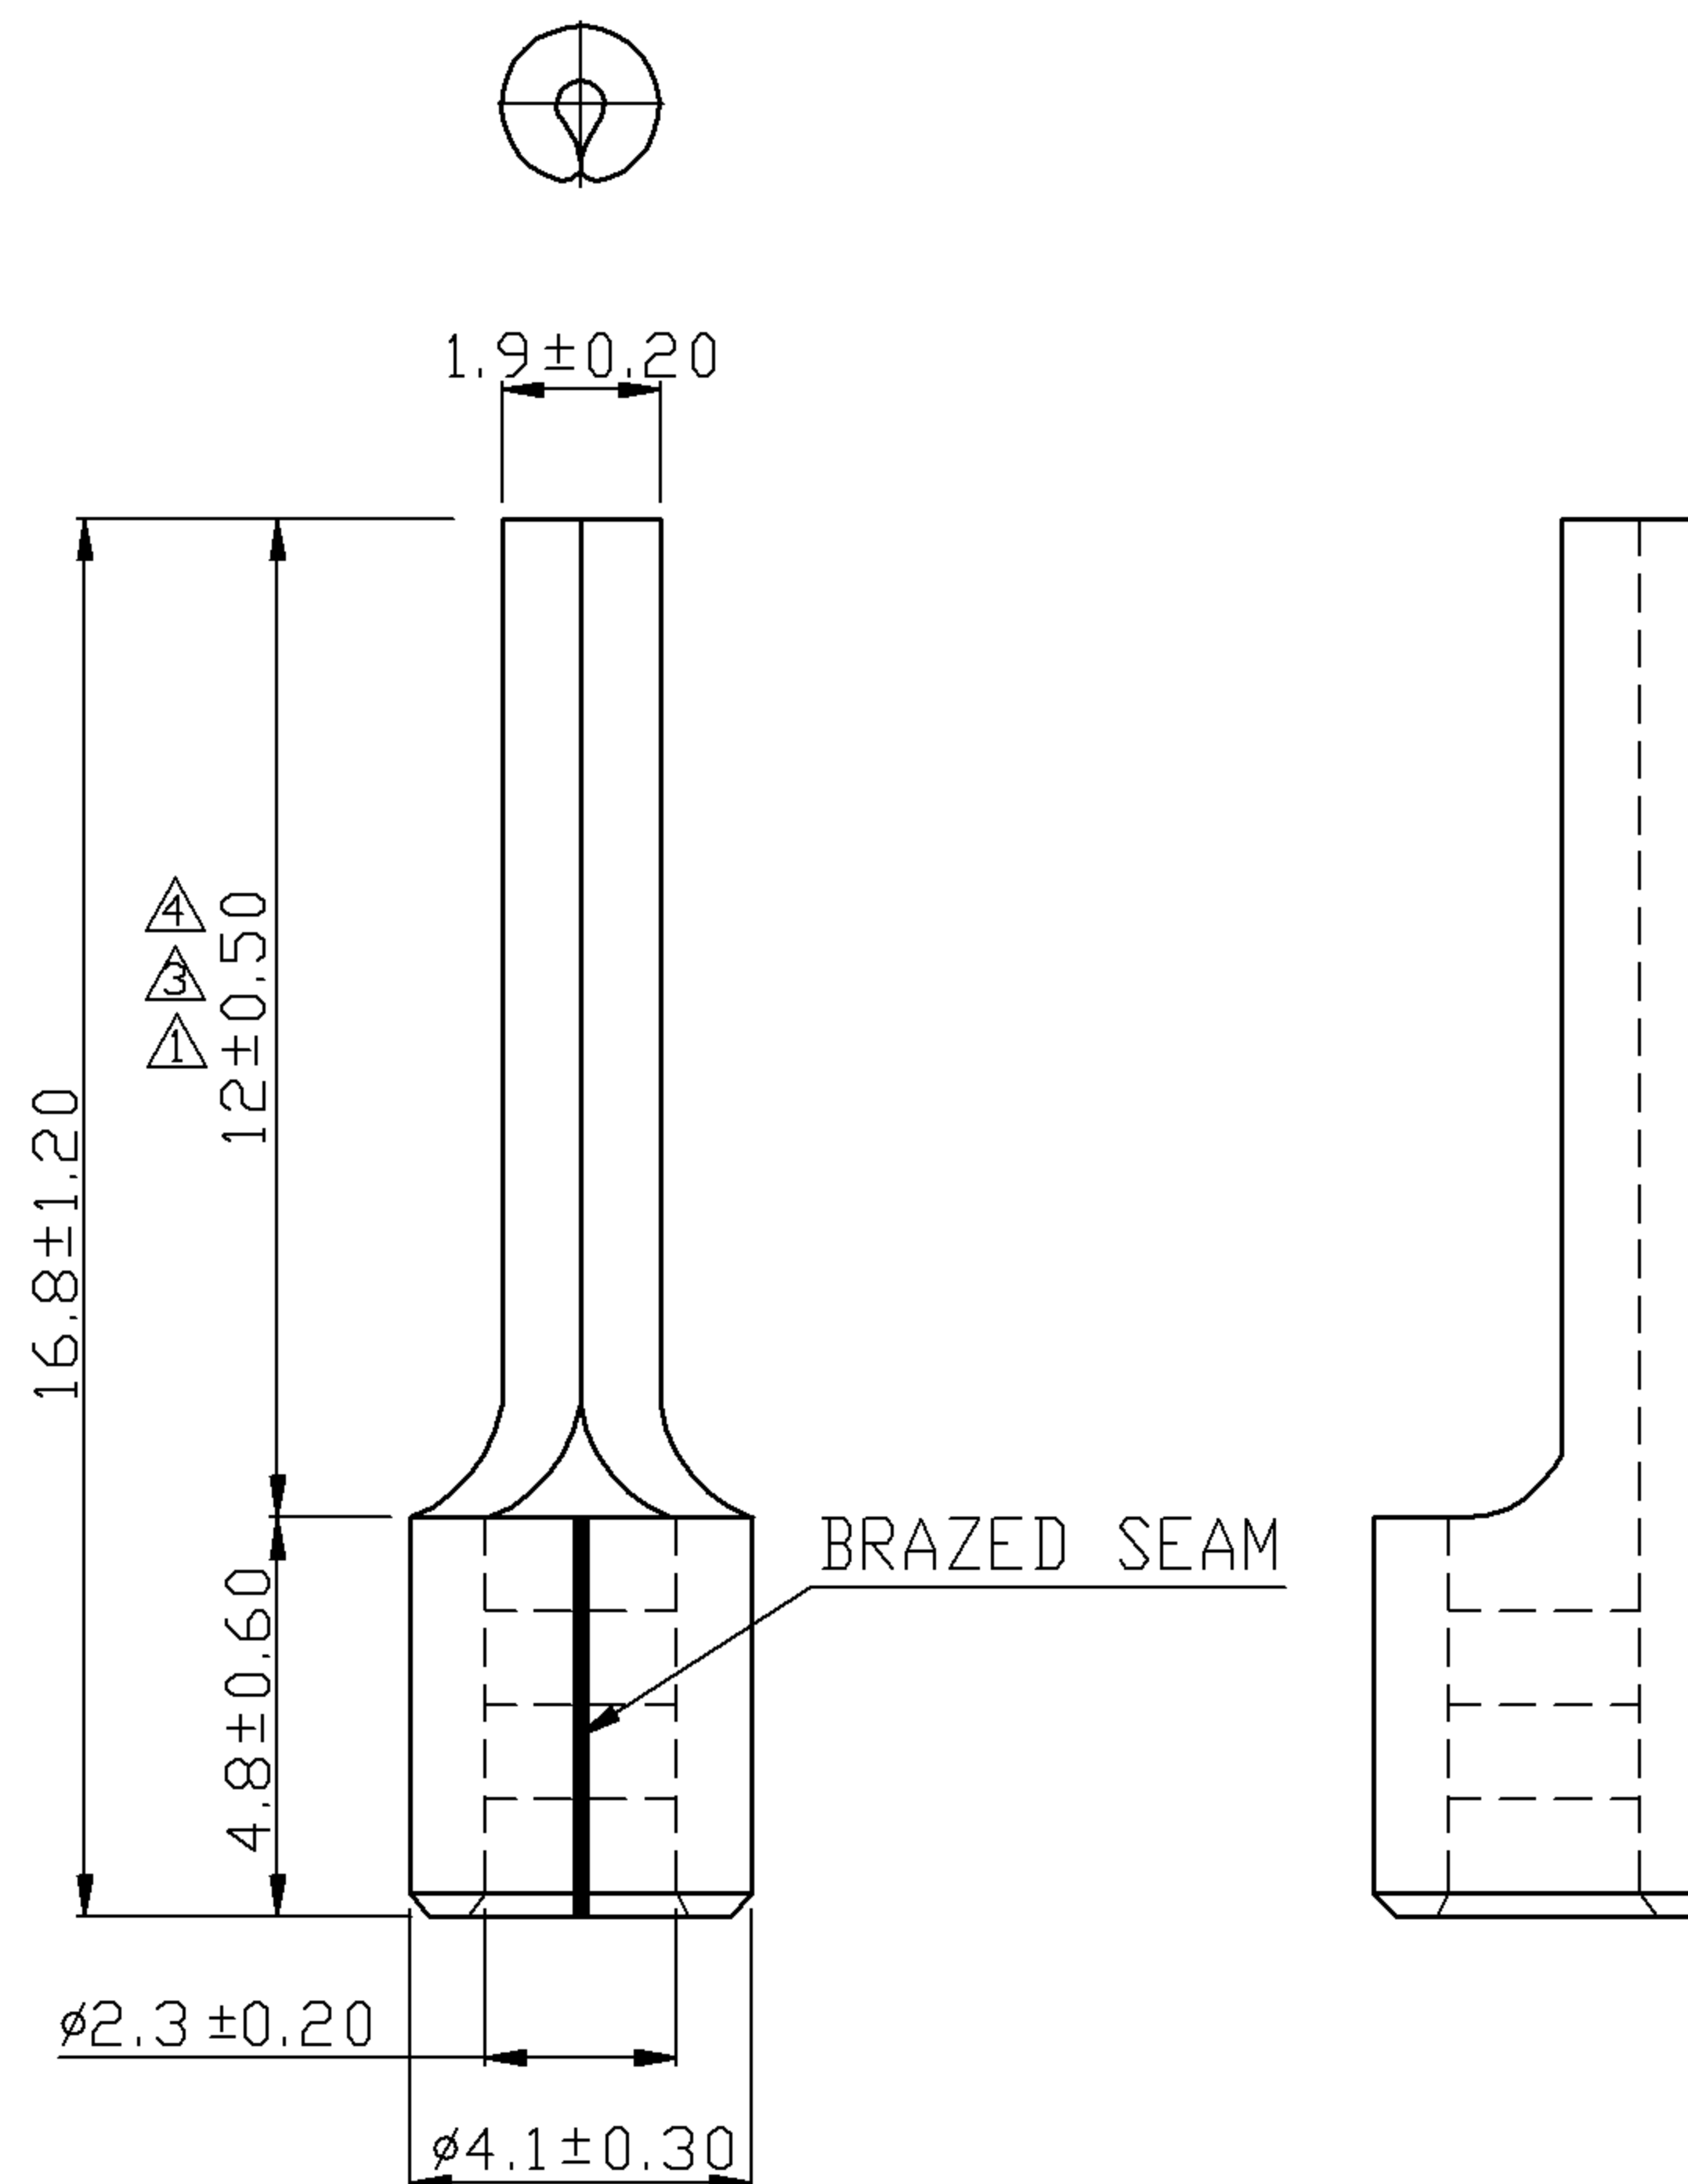

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	18	30	
2. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified			
0 >	mm ±	ANGLE	
>	mm ±	0°	° REF ±
>	mm ±	°	° ±
>	mm ±	°	° ±

NAME	NON-INSULATED PIN TERMINALS				UNIT	
PART NO.		MATERIAL	COPPER		APPROVE	
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2007/06/08	5/1	1-4	10F1	DRAWN	