
Catalog Number	11826
UPC Number	60198611826
Description	Non-Insulated Pin Terminal 12-10 AWG



Features

- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Easy entry expanded barrel eliminates strand “Hang Up”, increases the crimping rates and the reliability of the termination
- Wire range stamped on the surface for easy interpretation
- Brazed seams prevent splitting under maximum pressure
- Serrated barrel provides excellent contact & mechanical pull-out force resistance
- Excellent for terminal block applications

General	
Insulation Type	N/A
Material	Copper Tubular/Copper Plate
Finish	Electro-Tin Plated
Color	N/A
Wire Range	12-10
Stud Size	N/A



Dimension Information	
L Inches (mm)	0.787
D Inches (mm)	0.22
D1 Inches (mm)	0.134
E Inches (mm)	0.236
F Inches (mm)	0.551
W Inches (mm)	0.11
T Inches (mm)	0.039


Specifications		
Temperature Rating	150^{O}C	
Voltage Rating	600 V	
Flammability Rating	N/A	
Amp Rating	12 AWG	35 Amps
	10 AWG	50 Amps

Packaging	
Bag Qty	100
Master Bag Qty	1000

Certifications	
UL	Yes
cUL	Yes
RoHS	Yes

Morris Products 53 Carey Road, Queensbury, NY 12804
www.morrisproducts.com

REV	DESCRIPTION	DATE
1	RDK-94281	2006/06/16
2	RDK960367	2007/04/18
△		2007/12/27
3	RDK-97127	2008/12/02
4	RDK-98020	2009/05/25
5	RDC-98309	2009/06/04

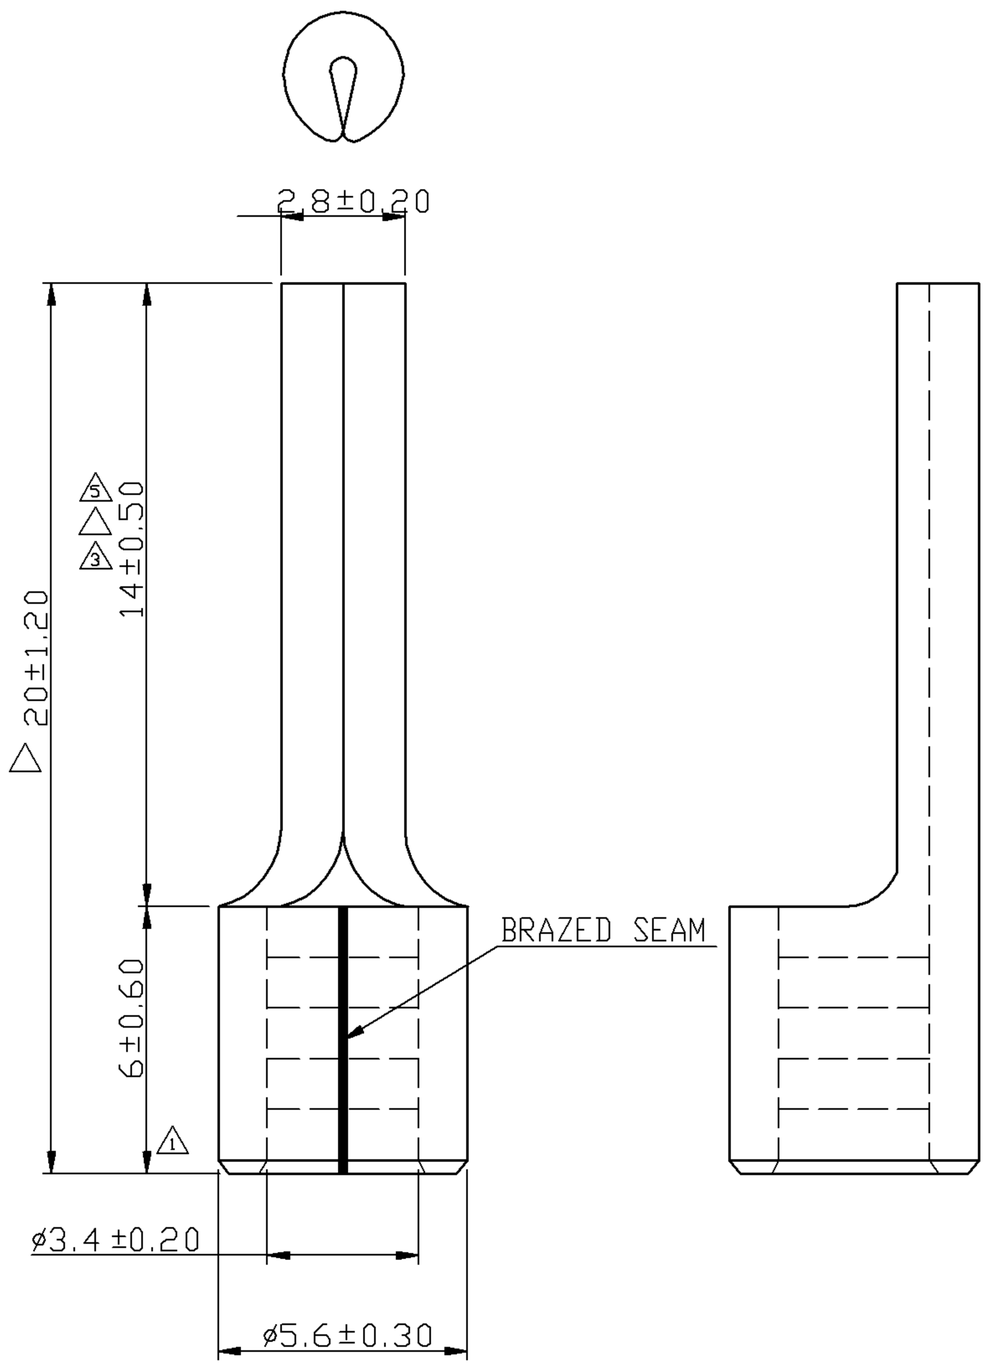

NOTE :

1. MAXIMUN ELECTRIC CURRENT :

A.W.G.	12	10		
AMP.	35	50		

2. WIRE RANGE : 12-10 A.W.G. (2.5 - 6 mm^2)
3. SURFACE TREATMENT : TIN PLATED
4. THICKNESS : 1.00 mm

4 Tolerance Unless Otherwise Specified	
0 > mm ±	ANGLE
> mm ±	0°> ° REF ±
> mm ±	°> ° ±
> mm ±	°> ° ±

NAME	NON-INSULATED PIN TERMINALS				UNIT	
PART NO.	11826	MATERIAL	COPPER		APPROVED	
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2007/04/18	5/1	1-5	1OF1	DRAWN	

Morris Products Inc.
53 Carey Rd. Queensbury, NY 12804