




**MORRIS CAT#: 11842, 11844, 11846.**  
**Nylon Insulated Blade Terminals**

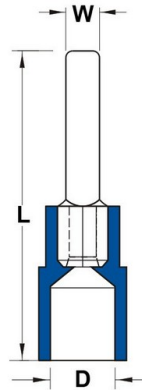

**Features:**

Nylon Insulated Blade Terminals features include:

- Blade Terminals are Nylon Insulated
- Color Coded Insulation for easy identification
- Manufactured from High Strength Electrolytic Copper Alloy
- Electro-Tin Plated for corrosion resistance
- Easy Entry Expanded Insulation eliminates strand “Hang Up”, and provides mechanical strain relief
- Wire range stamped on the surface for easy interpretation
- 11842 & 11844 has a Butted Seam
- 11846 has a Brazed Seam
- Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- 221°F (105°C) 600 Volts Max
- Maximum Electric Current: 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

**MAXIMUM ELECTRIC CURRENT:**

AWG	26	24	22	18	16	14	12	10
AMP	5.5	7	9	17	18	30	35	50

**MAXIMUM ELECTRIC RATING:** 221°F (105°C) 600 Volts

**INSULATION MATERIAL:** Nylon

**TERMINAL MATERIAL:** Electro-Tin Plated Copper - Brazed Seam

**FEATURES:** Serrated Barrel, Expanded Insulation

DIMENSIONS = INCHES

CAT. NO.	COLOR	WIRE SIZE AWG	TAB DIM.	L	D	W	BAG QTY	MASTER BAG QTY
11842	RED	22-16	.118 X .030	.858	.157	.118	100	1,000
11844	BLUE	16-14	.118 X .031	.937	.177	.118	100	1,000
11846	YELLOW	12-10	.110 X .039	.906	.252	.110	100	1,000