
# MORRIS CAT#: 11980-11981
# Nylon Fully Insulated Double Crimp Male Disconnects



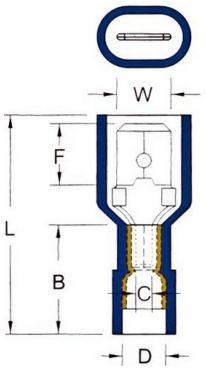


**MAXIMUM ELECTRIC CURRENT:**

| AWG | 22 | 20 | 18 | 16 | 14 | 12 | 10 |
|---|---|---|---|---|---|---|---|
| AMP | 3 | 4 | 7 | 10 | 15 | 20 | 24 |

**MAXIMUM ELECTRIC RATING:** 221°F (105°C) 600 Volts
**INSULATION MATERIAL:** Nylon
**TERMINAL MATERIAL:** Electro-Tin Plated Brass
**DOUBLE CRIMP:** Extended Copper Sleeve for Multiple Crimps
**FEATURES:** Serrated Barrel, Expanded Insulation, Oval Housing Shape

**Features:**

Nylon Fully Insulated Double Crimp Male Disconnects features include:

- Double Crimp Fully Insulated Male Disconnects feature Nylon Insulation and Extended Crimp Sleeve
- Color Coded Insulation for easy identification
- Manufactured from High Strength Brass
- Electro-Tin Plated for corrosion resistance
- Easy Entry Expanded Insulation eliminates strand “Hang Up”, increasing crimping rates and provides mechanical strain relief
- Wire range stamped on the surface for easy interpretation
- Terminal Barrel has Butted Seam
- Serrated Barrel provides excellent electrical contact & resistance to pull-out forces
- Double Crimp Extended Crimp sleeve provides for multiple crimps resulting in improved electrical contact and pull-out force resistance
- 221°F (105°C) 600 Volts Max
- Maximum Electric Current: 22 AWG - 3 Amp, 20 AWG - 4 Amp, 18 AWG - 7 Amp, 16 AWG - 10 Amp, 14 AWG - 15 Amp, 12 AWG - 20 Amp, 10 AWG - 24 Amp
- cULus Listed
- Dimension Measurements = Inches
- Order Qty of 100 = 1 Bag of 100

DIMENSIONS = INCHES

| CAT. NO. | COLOR | WIRE SIZE AWG | NEMA TAB | W | F | L | B | C | D | T | BAG QTY | MASTER BAG QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 11980 | RED | 22-16 | .020 X.187 | .250 | .256 | .866 | .433 | .067 | .157 | .016 | 100 | 1,000 |
| 11981 | RED | 22-16 | .032 X.187 | .250 | .256 | .866 | .433 | .067 | .157 | .016 | 100 | 1,000 |