
MORRIS CAT#: 12102B
Non-Insulated Butt Splice Connectors 26-22
Bulk Bag



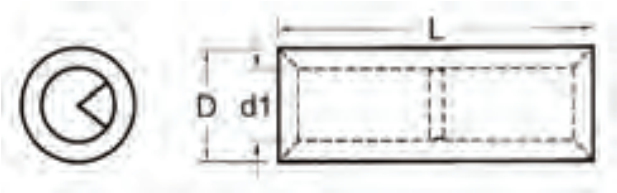

Features:

Non-Insulated Butt Splice Connectors 26-22 Awg features include:

- Non-Insulated Butt Splice Connector Material: Electrolytic Tubular Copper
- Electro-Tin Plated for corrosion resistance
- Splice Connector has Center Wire Stop Barrier
- Maximum Electric Current: 26 AWG - 5.5 Amp, 24 AWG - 7 Amp, 22 AWG - 9 Amp, 20 AWG - 12 Amp, 18 AWG - 17 Amp, 16 AWG - 18 Amp, 14 AWG - 30 Amp, 12 AWG - 35 Amp, 10 AWG - 50 Amp, 8 AWG - 70 Amp, 6 AWG - 95 Amp, 4 AWG - 125 Amp
- 302°F(150°C) 600 Volts Max
- Butt Splice Wiring Connector is cULus Listed
- Dimension Measurements = Inches
- Order Qty of 1000 = 1 Bag of 1000

MAXIMUM ELECTRIC CURRENT:

AWG	26	24	22	20	18	16	14	12	10	8	6	4
AMP	5.5	7	9	12	17	18	30	35	50	70	95	125

MAXIMUM ELECTRIC RATING: 302°F (150°C) 600V
CONNECTOR MATERIAL: Electro-Tin Plated Tubular Copper

DIMENSIONS = INCHES

CAT. NO.	WIRE SIZE AWG	L	D	DI	BAG QTY	MASTER BAG QTY
12102B	26-22	.472	.083	.051	1,000	20,000